



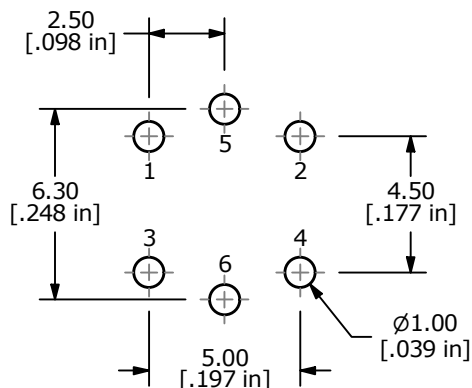


P.C.B. LAYOUT





CIRCUIT: SPST

LED SPECS	UNITS	BLUE
FORWARD CURRENT	mA	20 TYP.
FORWARD VOLTAGE	V	2.9 TYP. - 4.0 MAX.
LUMINOUS INTENSITY	MCD	150 TYP.

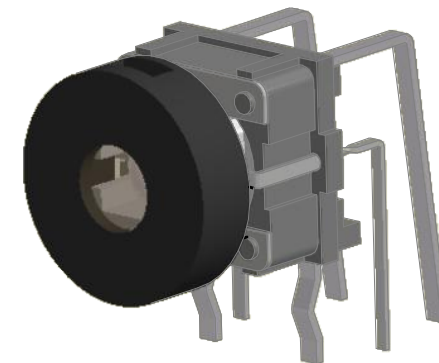

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100m Ω MAX.
5. INSULATION RESISTANCE: 100M Ω MIN.
- ▲ 6. OPERATING FORCE: 160 $\pm$ 50gf
7. TRAVEL: 0.2 $\pm$ 0.1mm
8. OPERATING TEMPERATURE: -20°C to 70°C
9. OPERATING LIFE: 500,000 CYCLES
- ▲ 10. LED: BLUE
11. ▲ DENOTES CRITICAL PARAMETERS
12. PACKAGING: 100 PIECES PER TRAY

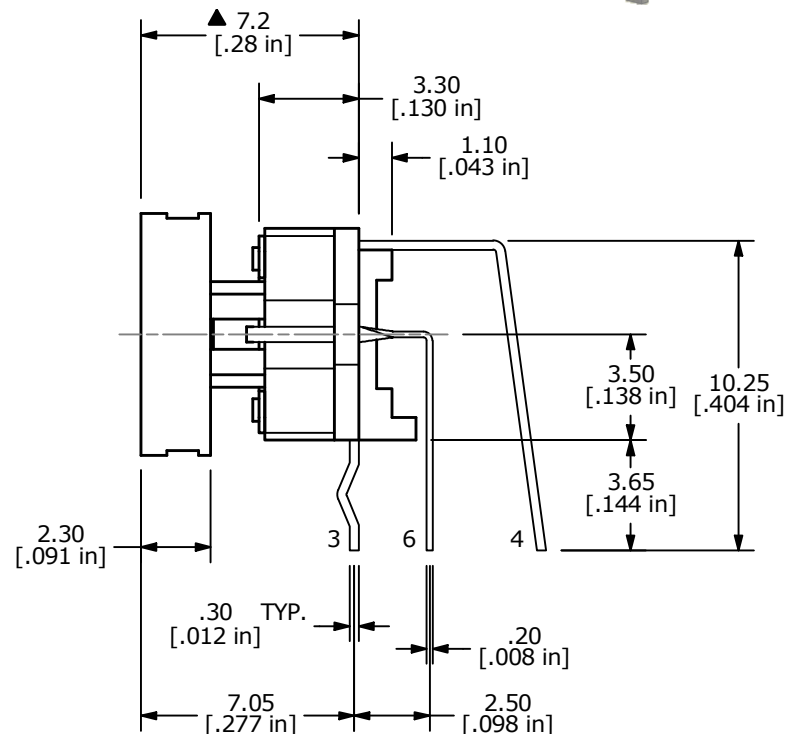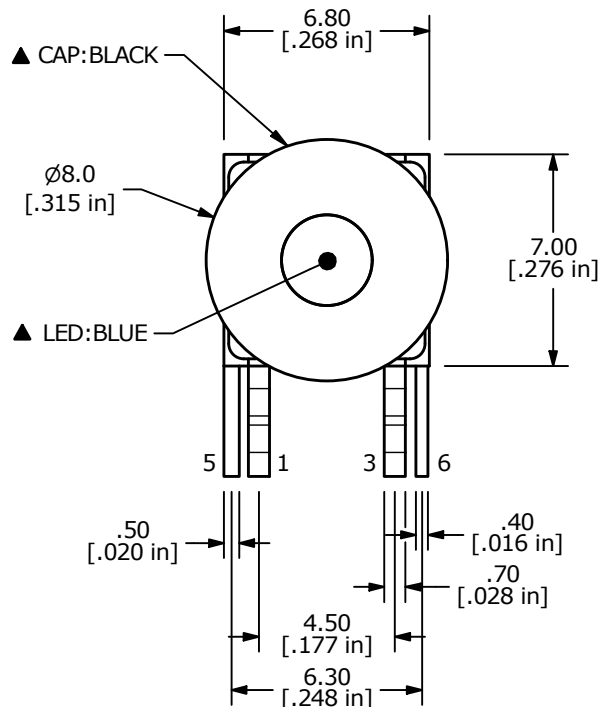

J	24463	update dim. 7.00 to 7.2	8/27/20	MW
H	24039	Actuator Button to Ø8.0 from Ø8.00	9/16/19	MW
G	21659	ADDED NOTE 13	10/23/14	AS
F	19956	CORRECT NOTES / LED CHART/ DIM	05/20/11	BMA
E	19542	UPDATE DRAWING	12/21/10	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TL1260BQRBLK

SCALE 4:1

DATE 5/11/2007

DR TN

DWG B200000

REV J