

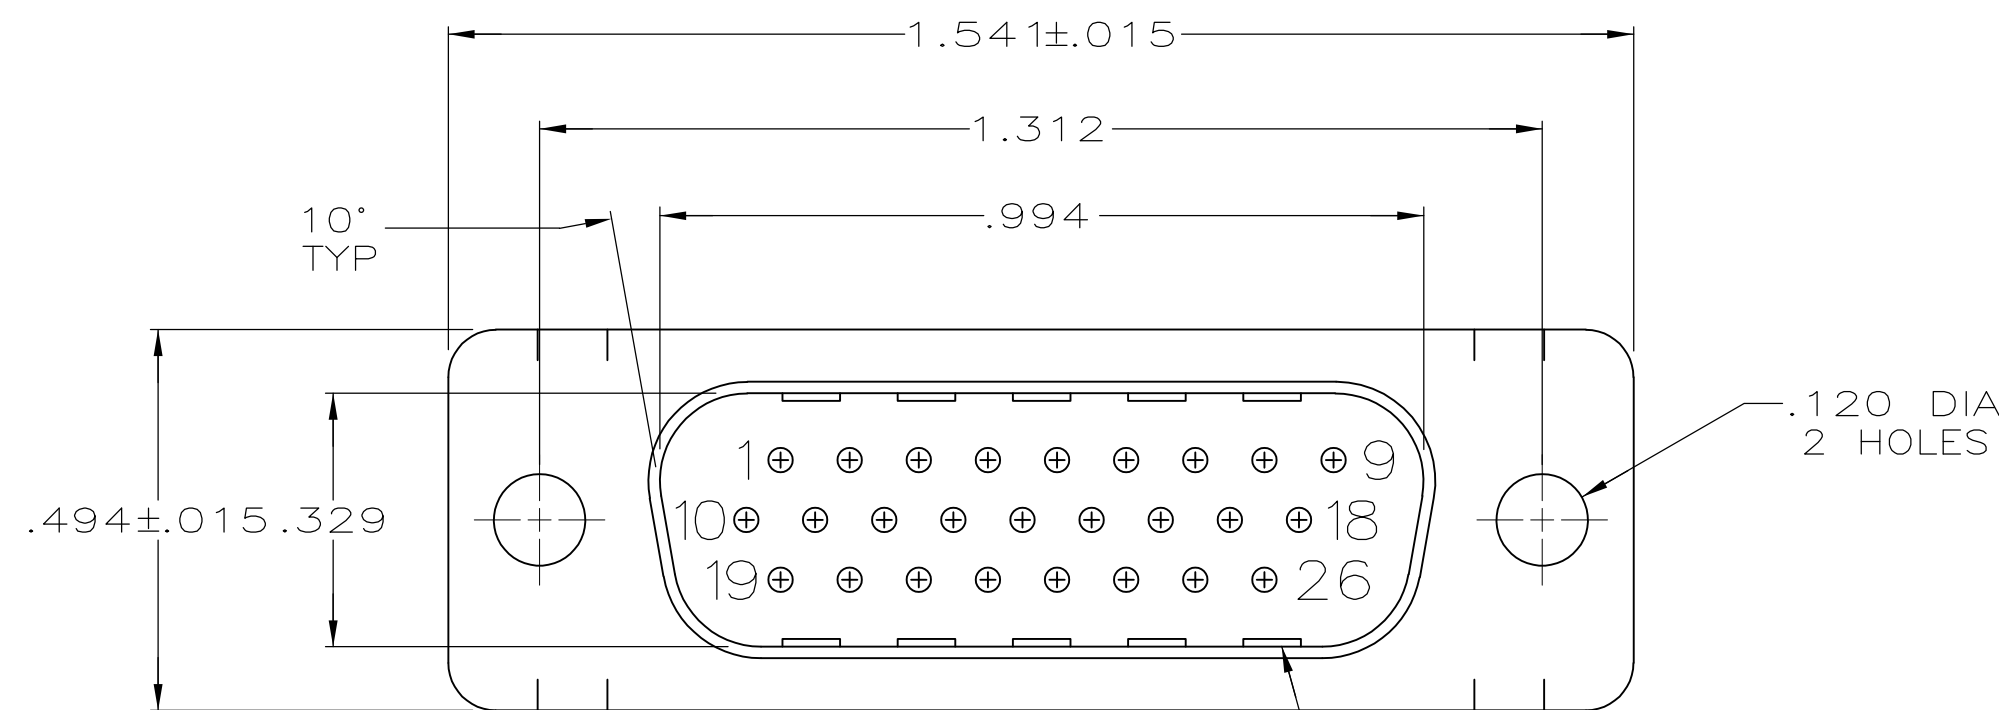


D

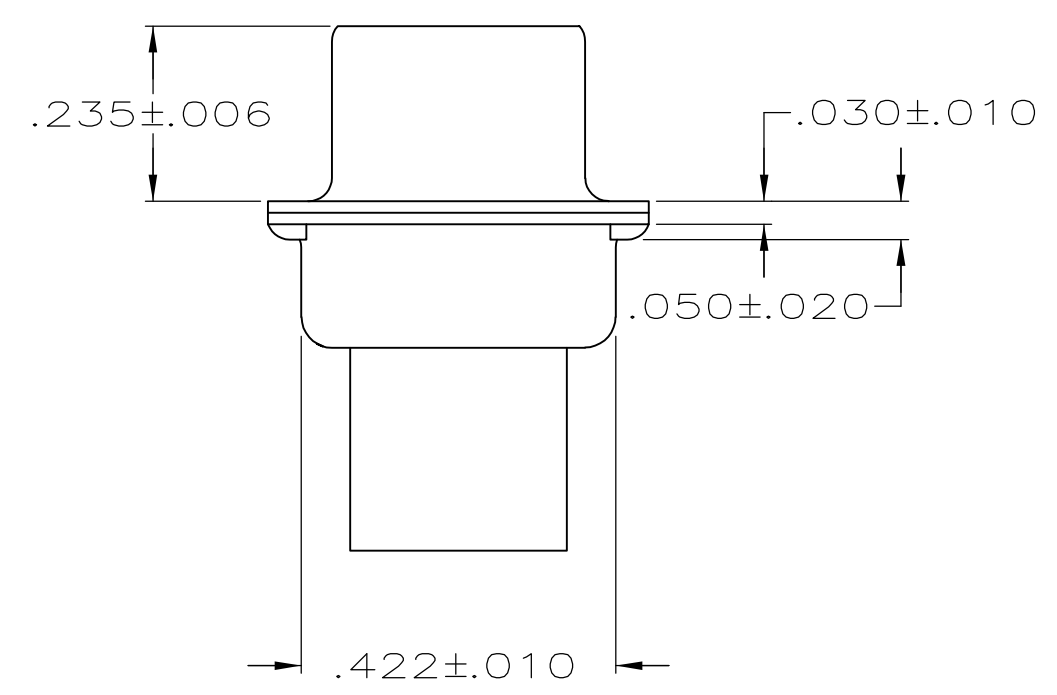

- 1. CONNECTOR ACCEPTS 22 DF PIN CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- 2. FLAME RETARDANT 94V-0 RATED GLASS FILLED NYLON, COLOR: BLACK.
- 3. CARBON STEEL.
- 4. .000200 MIN. TIN PLATE OVER .00100. MIN. COPPER UNDERPLATE.

C

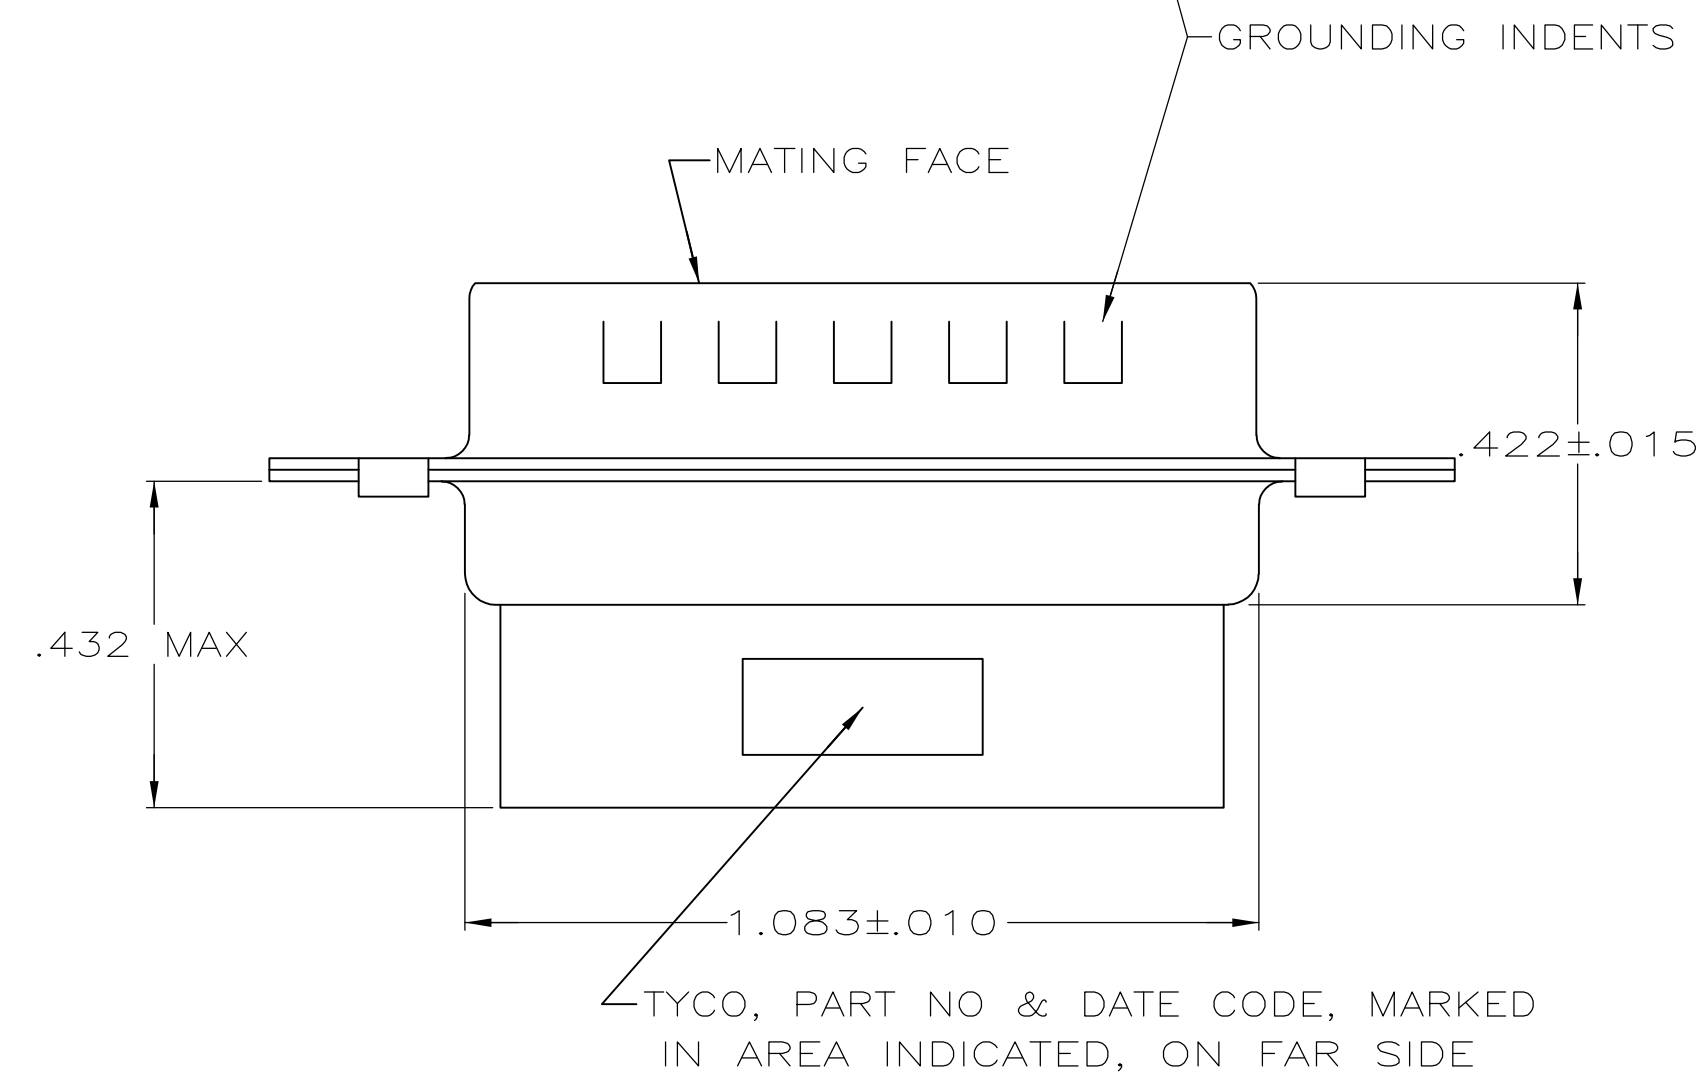

B

A

1658671-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. BAUM 02JAN04	TE Connectivity	
		CHK S. BOLASH 02JAN04		
		APVD M. WALMSLEY 02JAN04	NAME	
DIMENSIONS: INCHES		PRODUCT SPEC 108-1268	PLUG ASSEMBLY, SIZE 2, 26 POSN, HDP-22, AMPLIMITE®	
		APPLICATION SPEC 114-10001	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
		MATERIAL MOLDED PARTS: 4 SHELLS: 4	WEIGHT -	A2 00779 1658671 -
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 of 1 REV P

D

C

1658671
B

A