


BN 388

Cross recessed flat countersunk
head screws
Phillips H

DIN 965 A
~ISO 7046
~UNI 7688

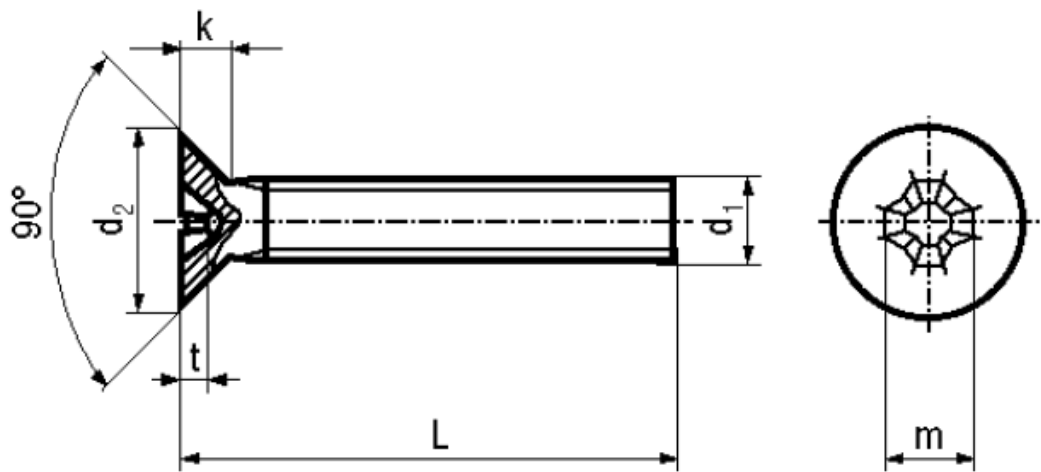

Material	Steel	Tensile strength	400 N/mm2
Surface	zinc plated blue	Elongation after fracture	min. 14%
Quality	4.8		

Article No. - 2096730	
d1	M5
L	6
d2 max.	9,2
k max.	2,5
Phillips	2
m~	4,6
t min.	2,1
t max.	2,6

DIN 965 A: Standard withdrawn and replaced under European standardization by the corresponding ISO standard.
All lengths fully threaded.
DIN 965 A Prozdřiv cross recess (Type Z) see BN 3333