
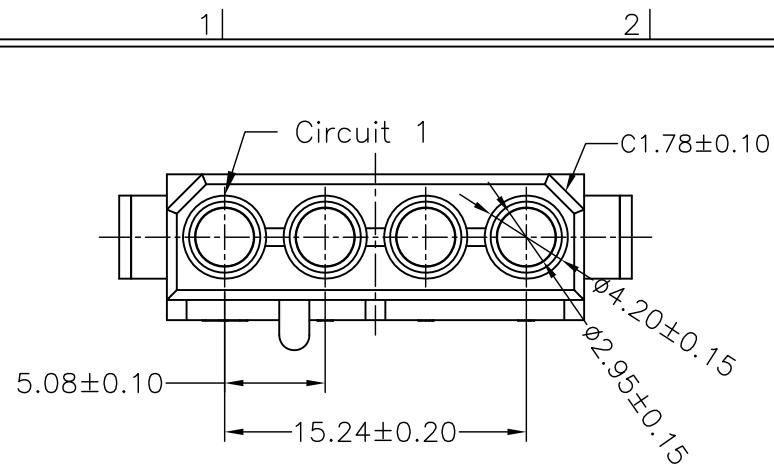
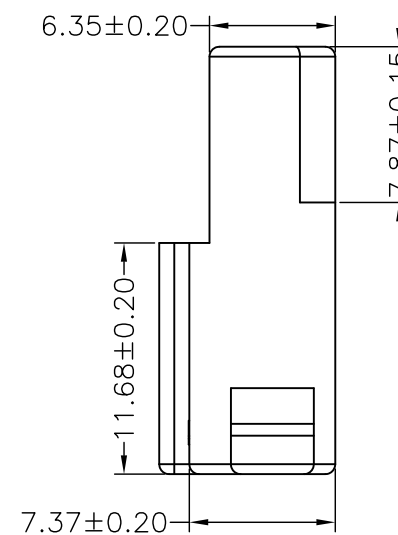


Ordering code

C5080 HF-04P-XXX			
①	②	③	④
① Series No.			
② Connector type: HF=Receptacle			
③ No. of circuits			
④ Option code:			
Blank=Nylon 66,UL94V-2, Natural(Translucent)			
-V0=Nylon 66,UL94V-0, Natural(White)			

SPECIFICATIONS

Current Rating: 10A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute

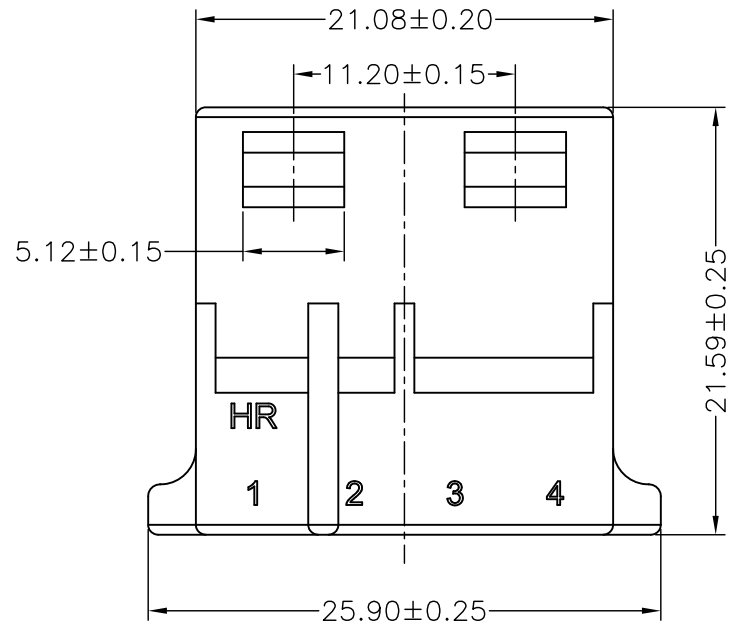

				 燦達電子工業股份有限公司 JOINT TECH ELECTRONIC IND. CO., LTD.				
				UNIT	SCALE	SHEET	TITLE: P/N:C5080HF-04P 5.08mm PITCH HOUSING-RECEPTACLE	
				mm		1 of 1		
				DRAWN BY	APPROVED BY			
				歐陽小強	董正一			
				2007.04.25	2007.04.25			
				GENERAL TOLERANCE				
A1	EN1107280318	2011.07.28	肖勇	X. X±0.25	ANGLE±		DRAW NO. : C5080HF-04P	REV. A1
A0	NEW RELEASE	2007.04.25	董正一	X. XX±0.15				
REV.	DESCRIPTION	DATE	NAME	X. XXX±0.05				