






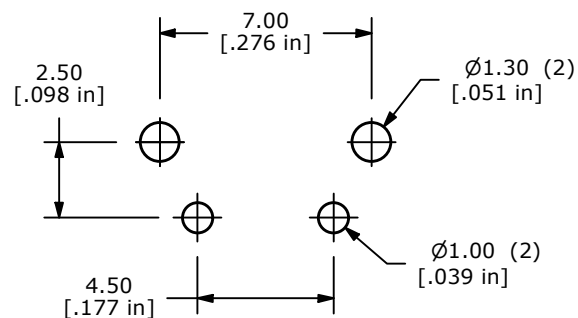


PC MOUNTING



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 12VDC, 50mA
- ▲ 6. OPERATING FORCE: 100 ± 50 gf
7. TRAVEL: $0.25 +0.2/-0.1$ mm
8. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
9. MECHANICAL/ELECTRICAL LIFE 500,000 CYCLES MIN.
10. ▲ DENOTES CRITICAL PARAMETER
12. PACKAGING: 1,000 PIECES PER REEL
13. OPERATING TEMP: -40°C TO 85°C

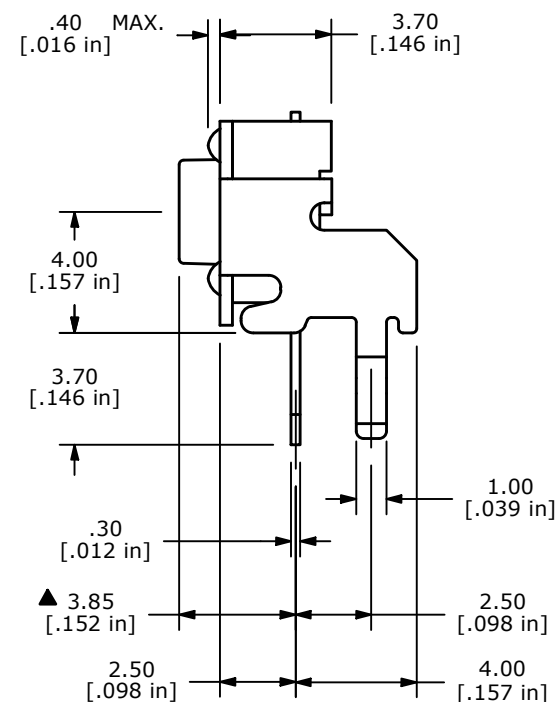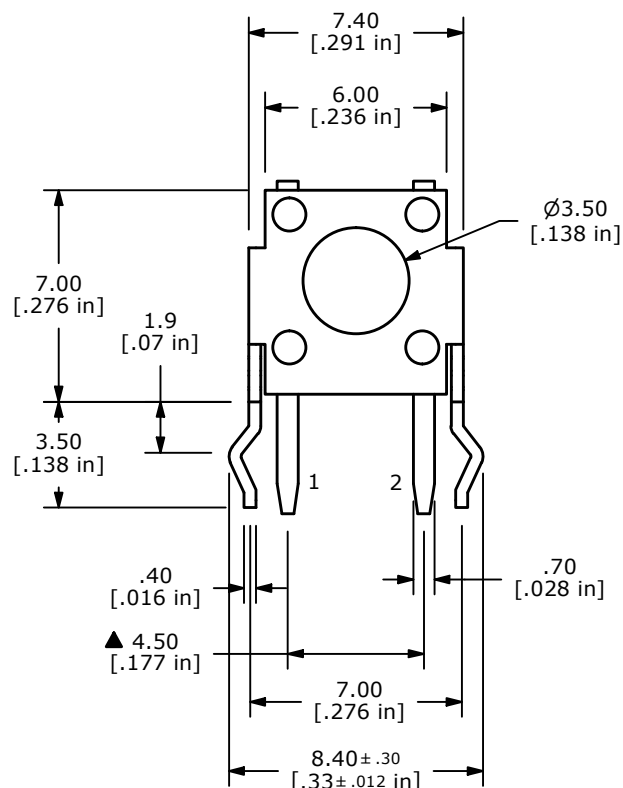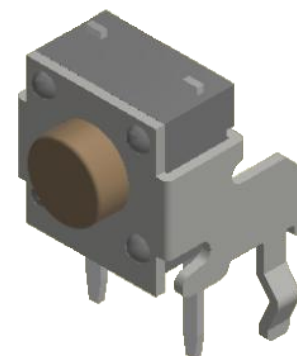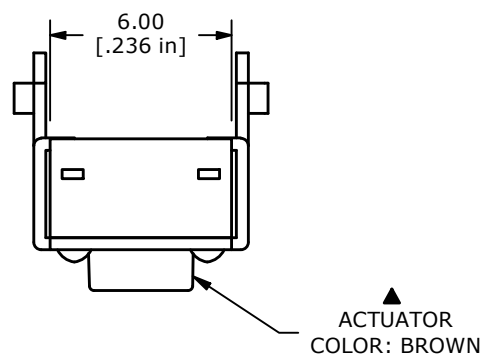

F	24551	REMOVE STEP IN HOUSING, CHANGE TEMP	10/29/20	JM
E	22684	CORRECT ACTUATOR COLOR TO BROWN	1/20/17	MW
D	22178	UPDATE PRINT TO NEW FORMAT	3/3/16	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TL1105VF100Q

SCALE 4:1

DATE 10/9/2009

DR MM

DWG P020304

REV F