

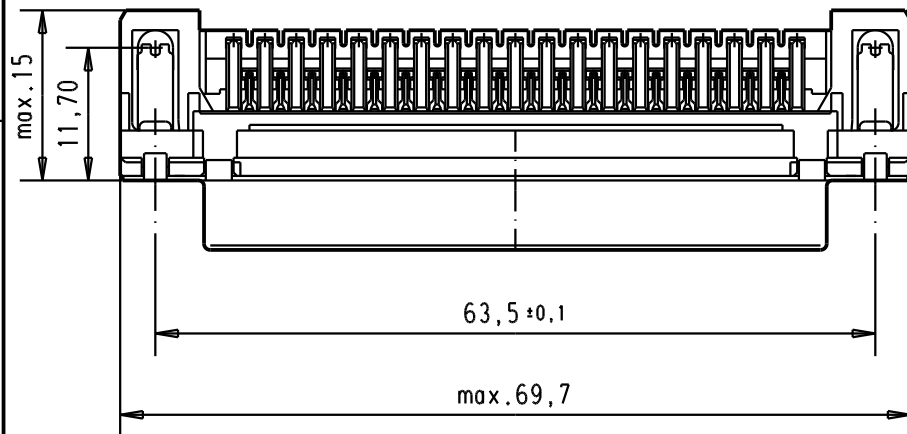
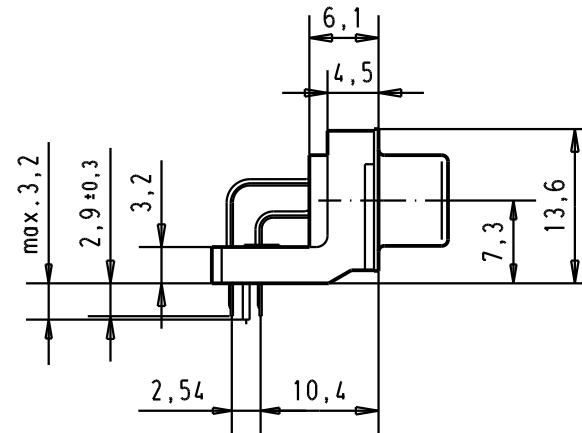


5 4 3 2 1


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

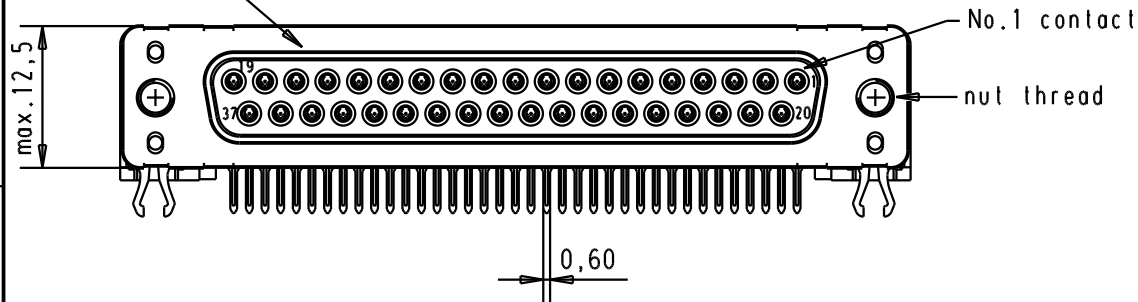

PCB layout hole
component side

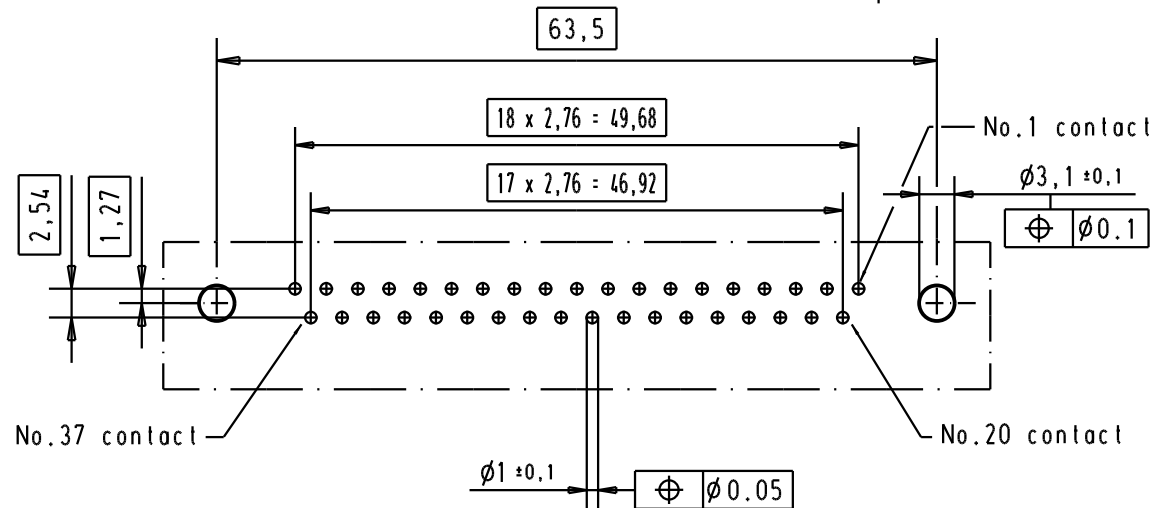

Connector retention and insertion forces on the PCB = 25 / 80 newtons

A	09 66 452 3611	M 3	1							 All Dim. in mm Orig. Size DIN A 4	D-Sub 37 poles standard angle female, solder pin with nut and grounding board lock.	Moßstab/ Scale 1.5:1
	09 66 452 6611	M 3	2									
	09 66 452 7611	M 3	3									
	09 66 452 3612	4-40 UNC	1	31892	05/05/04	JH				HARTING EURL F-95972 Paris	TB 0966452x61x	Blatt / Page 5
	09 66 452 6612	4-40 UNC	2	31084	04/SEP/02	YT						
	09 66 452 7612	4-40 UNC	3	27960	06/dec/00	ALSPACE						
	Part number	Nut thread	Performance level	Mod.	Dat.	Name						