



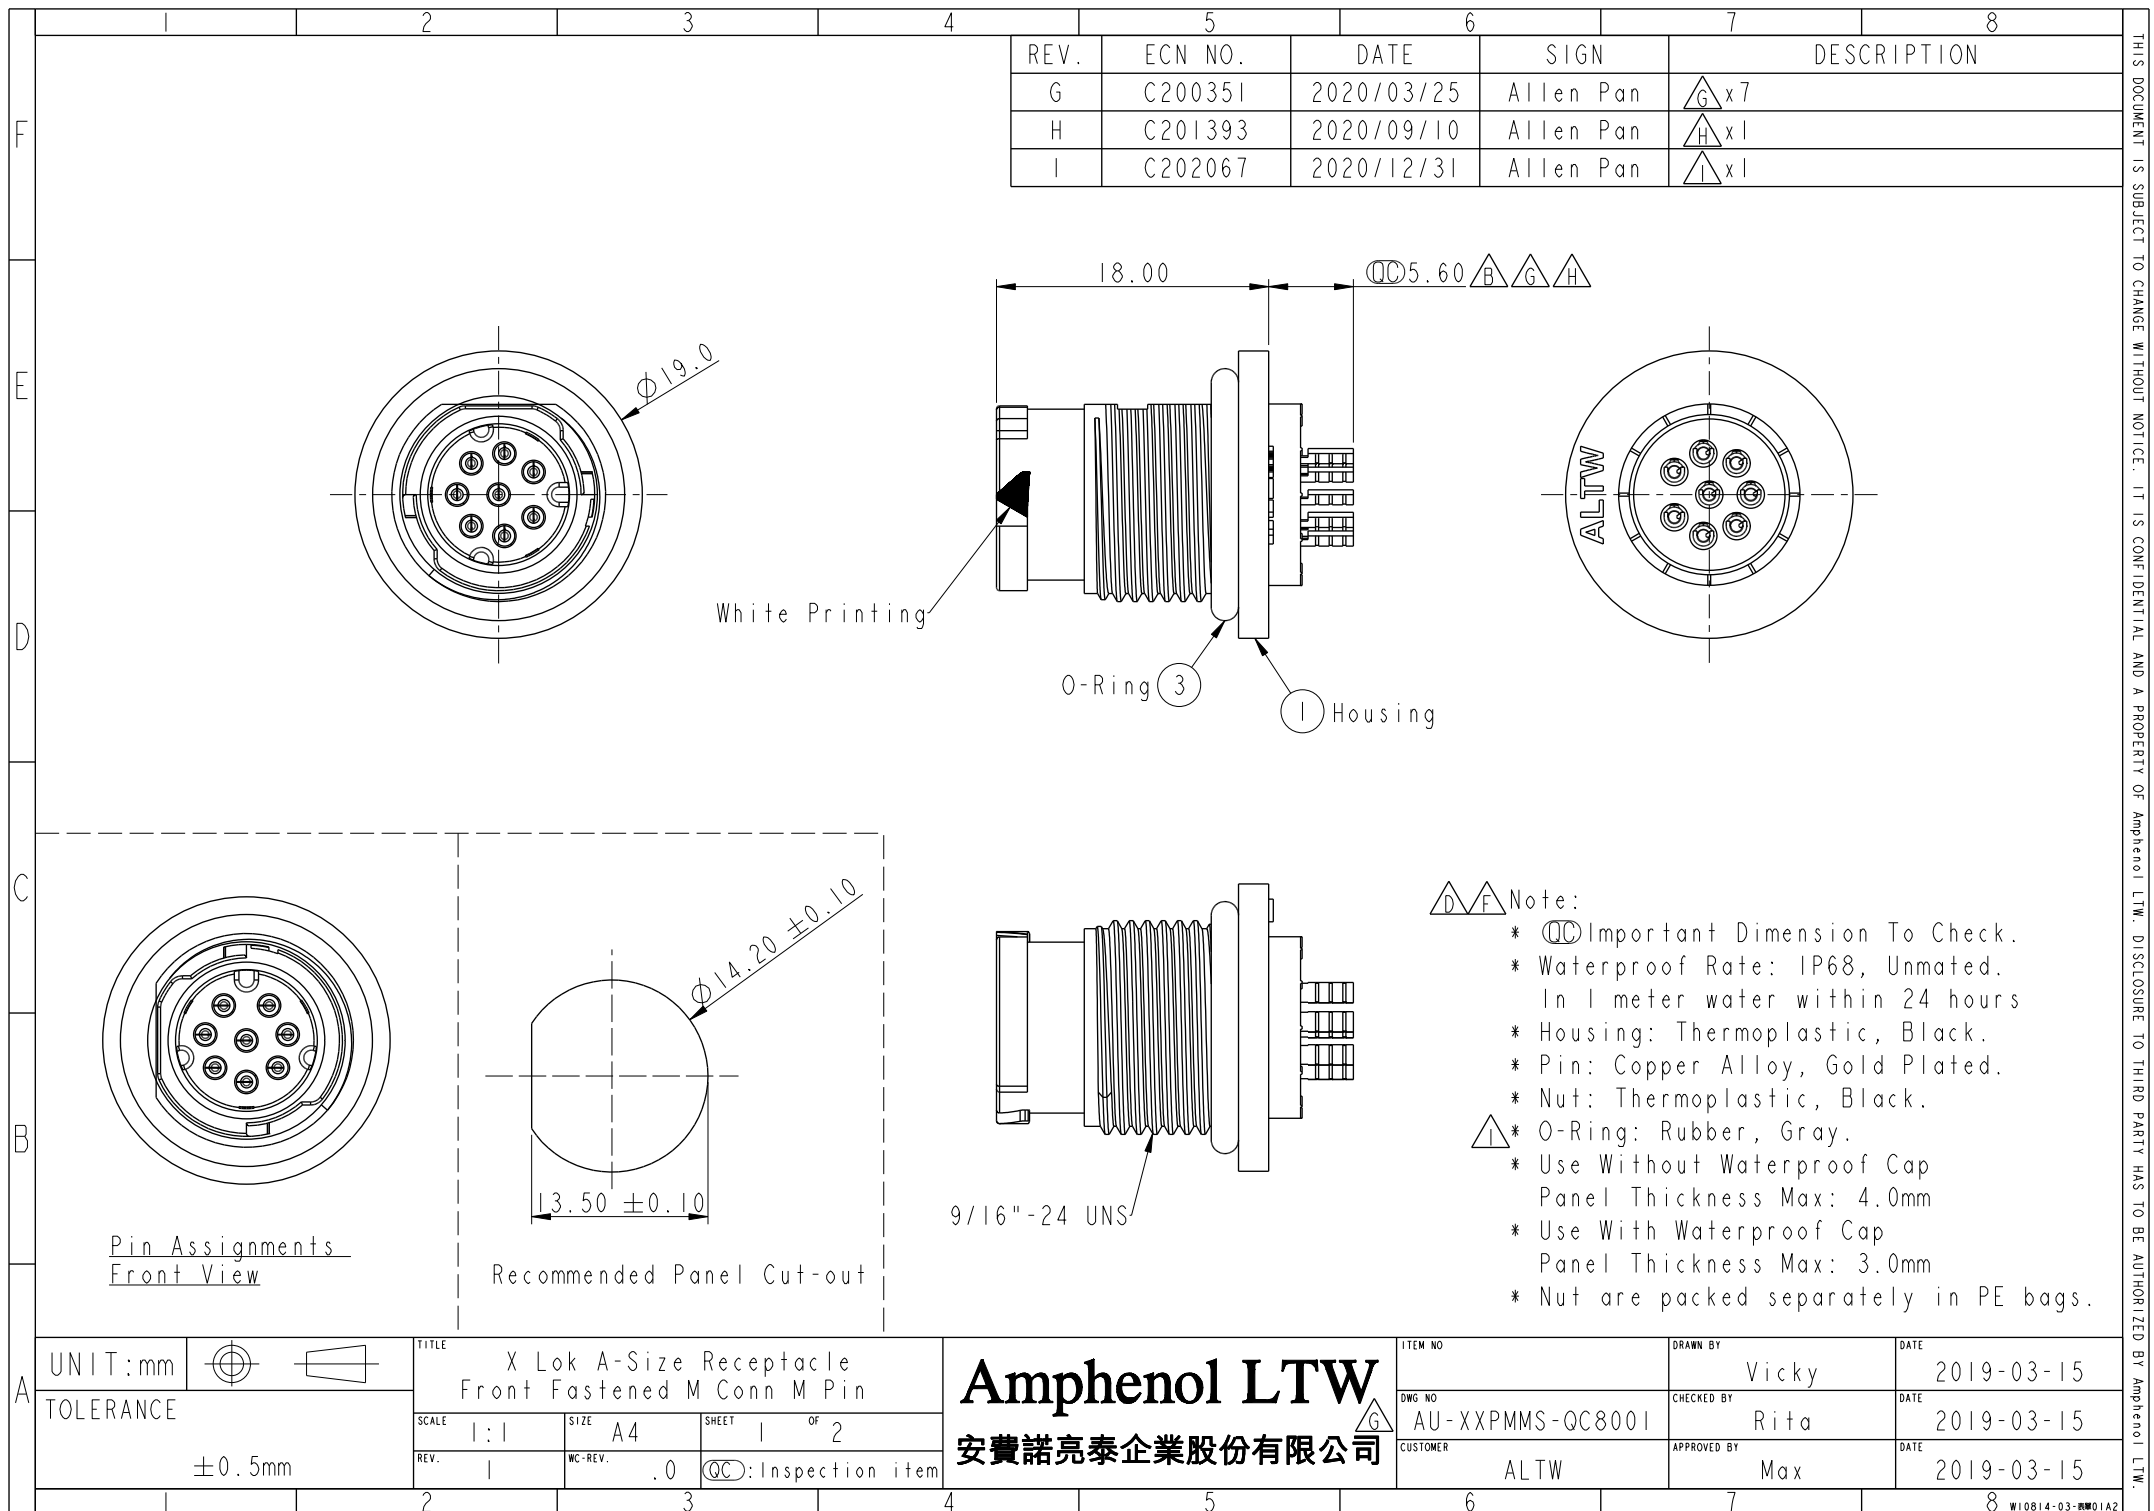

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

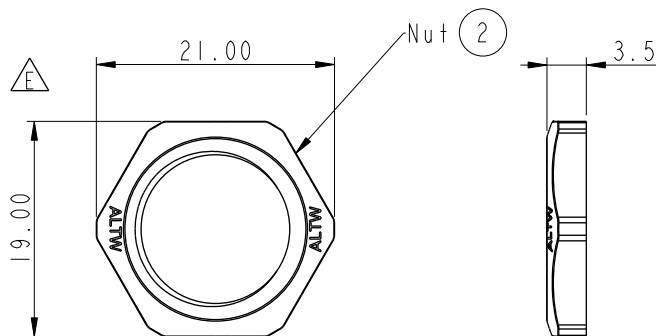


$\triangle C \triangle G$ AU: 2A $\triangle D \triangle G$ AU- XX P M M S- Q C 8 0 0 I
 $\triangle G$ 06: 6Pin
08: 8Pin

P: Front Fastened
M: Male Connector(公座)
M: Male Pin(公Pin)
8: IP68(防水等級68)
C: Circular
Q: Push Lock
S: Solder Type

$\triangle C \triangle G$


$\triangle E$



6PIN

AU-06PMMS-QC8001


$\triangle E$



8PIN

AU-08PMMS-QC8001

UNIT:mm



TOLERANCE

$\pm 0.5\text{mm}$

TITLE
X Lok A-Size Receptacle
Front Fastened M Conn M Pin

SCALE
1:1

SIZE
A4

SHEET
2 OF 2

REV.
1

WC-REV.
.0

QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DWG NO

CUSTOMER

AU-XXPMMS-QC8001

ALTW

DRAWN BY

CHECKED BY

APPROVED BY

Vicky

Rita

Max

DATE

DATE

DATE

2019-03-15

2019-03-15

2019-03-15