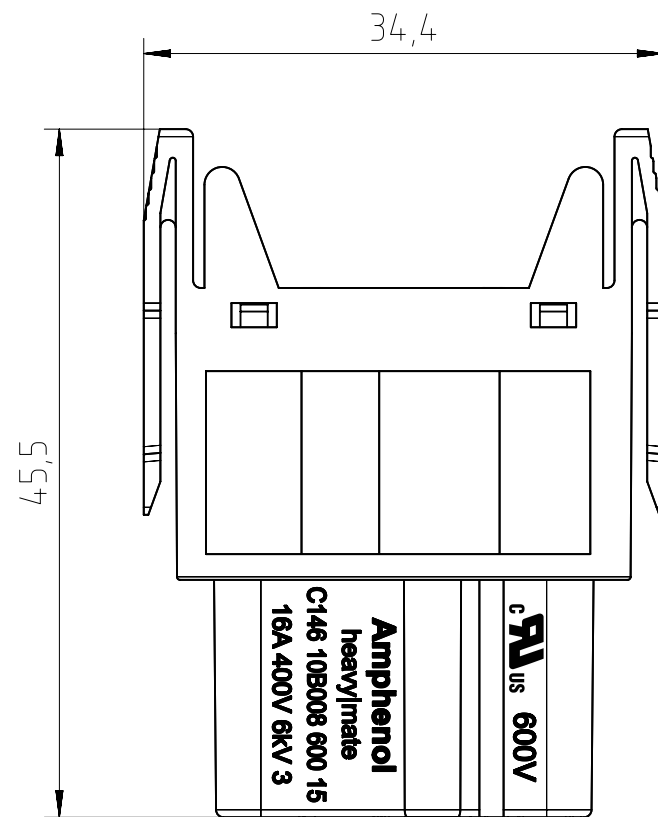
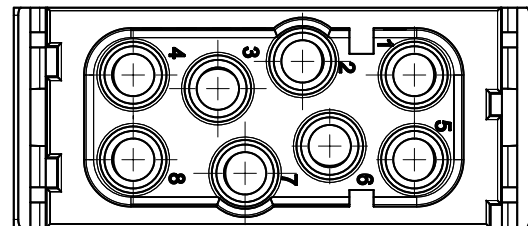
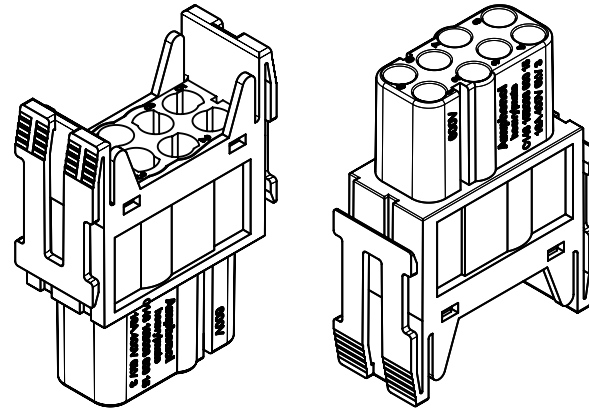



Alle technischen Daten wurden unter Laborbedingungen ermittelt und können im Praxisbetrieb abweichen.
Es handelt sich bei den Angaben weder um Beschaffenheits- noch um Haltbarkeitsgarantien.
All technical data have been measured in a laboratory environment and can be different during practical usage of the product. Any product information is for descriptive usage only and not legally binding; particularly the information does not constitute or provide any legal guarantees ("Beschaffenheitsgarantie" or "Haltbarkeitsgarantie").

Characteristics

General Characteristics	Standard	Value
number of contacts		8
termination technique		crimp
wire gauge		0,14 mm ² - 4 mm ² AWG 26 - AWG 12
max. insulation diameter		4,6 mm
flammability	UL 94	V-0
Electrical Characteristics	Standard	Value
rated voltage	IEC 60664-1	400 V (UL/CSA: 600 V)
pollution degree	IEC 60664-1	3
installation (overvoltage) category	IEC 60664-1	3
material group	IEC 60664-1	1
rated impulse withstand voltage	IEC 60664-1	6 kV
rated current T _{amb} = 40 °C		16 A
current carrying capacity	IEC 60512-5-2	see derating curve
contact resistance	IEC 60512-2-1	≤ 5 mΩ
insulation resistance	IEC 60512-3-1	≥ 10 ¹⁰ Ω
Climatical Characteristics	Standard	Value
climatic category	IEC 60068-1	40 / 125 / 10
upper temperature	IEC 60512-11-9	+125 °C
lower temperature	IEC 60512-11-10	-40 °C
Mechanical Characteristics	Standard	Value
mechanical operation	IEC 60512-9-1	≥500 mating cycles
Materials	Standard	Value
insert		PA-GF
contacts		CuZn (brass)
contact plating		Ag (silver)/Au (gold)
color		black

Gewicht (errechnet) / Calc WT: 9,5 g				Zul. Abw./Tolerances: ISO 2768-m		Maßstab / Scale: 2:1 (1:1)		A3		
Prüfmaß / Testdimension						CUSTOMER DRAWING				
Teileindex / Partindexnumber:										
Bagatelle change:				 DIN / ISO 13715		Buchsenmodul 8-Pol <i>socket module 8 pole</i>				
		Gez. 09.10.2015		M C146 10B008 600 15					Blatt/ Sheet	
		Drawn PWOELFFLE							1	
		Status Released							1 Bl.	
		Gepr. 08.09.2017								
		Checked MGRIMM		Ers. f. / Replacement for: M-C146 10B008 500 15 Rev.01						
04	201700257	30.08.2017	PWÖLF	Amphenol Tuchel Industrial GmbH						
03	201600736	27.10.2016	PWÖLF							
02	201600135	01.03.2016	PWÖLF							
01	201500704	09.10.2015	PWÖLF							
Index	Änderung/Description		Datum/Date	Name						