



Electro-magnetic Transducer

Shape



Type	BMT1606XH14	BMT1612XH14
Rated Voltage	6V _{DC}	12V _{DC}
Operating Voltage	4...8V _{DC}	8...15V _{DC}
a)Sound Output Level at 10cm	min. 85dB	
a)Rated Current	Max. 30mA	
a)Resonant Frequency	2300±300Hz	
Operating Temperature	-25...+70 °C	
Storage Temperature	-30...+80 °C	
Weight	7g	
a)Value applying rated voltage.		

Dimension

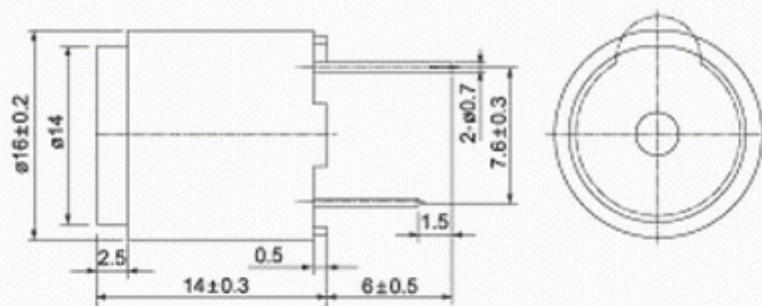

Characteristic

