

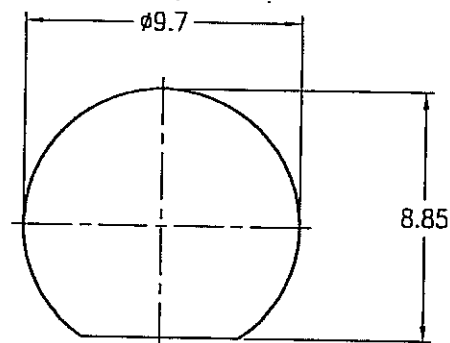
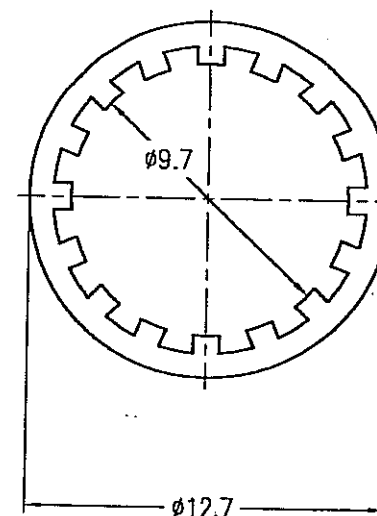
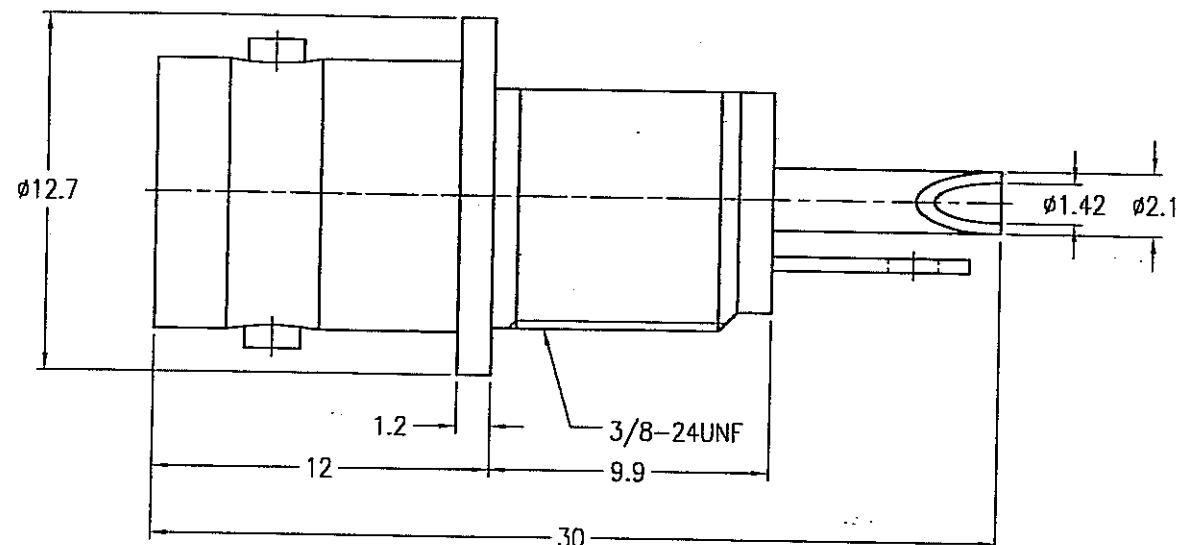
NOTES:

1. MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):
BODY - BRASS, NICKEL PLATING
CONTACT - BERYLLIUM COPPER, GOLD PLATING
INSULATOR - NYLON
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 2500 CYCLES MIN.
B. TEMPERATURE RANGE: - 65°C to +165°C
4. MAX. PANEL THICKNESS=3.2mm

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	05-Oct-06	46291	CISSY

RECOMMENDED
MOUNTING HOLE

12.7 HEX



RECOMMENDED TORQUE: A MAXIMUM TORQUE OF
12 INCH-LBS MAY BE APPLIED
ON HEX NUT WHEN MOUNTING
CONNECTOR IN PANEL.

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
0.5 - 6mm ±0.1mm
6 - 30mm ±0.2mm
30 - 120mm ±0.3mm
ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

DRAWN

DATE

TITLE

Amphenol RF

CISSY

05-Oct-06

BNC BULKHEAD RECEPT.
ISOLATED JACKDanbury CT USA, Tainan Taiwan, Shenzhen China
www.amphenolrf.com

REFERENCE

ENGINEER

DATE

APPROVED

DATE

DRAWING NO. B6651B1-004-NNYL5G-50

EAR#2150

CAD FILE

F:\DWG\B\6651B1\004\50\NNYL5GSZ

SCALE: 1/1

SHEET 2 OF 2

ITEM NO. 016651AAJ01JY5F

FINISH

DWG SIZE

CODE ID

REV

PART NO.

B

74868

A

031-6290