

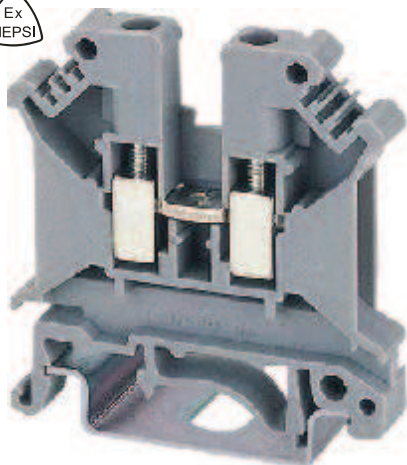


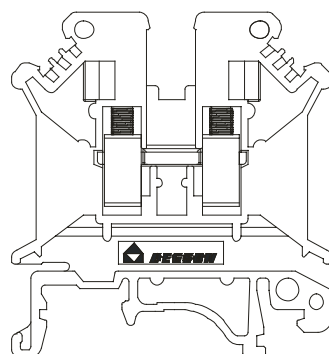

PC 4

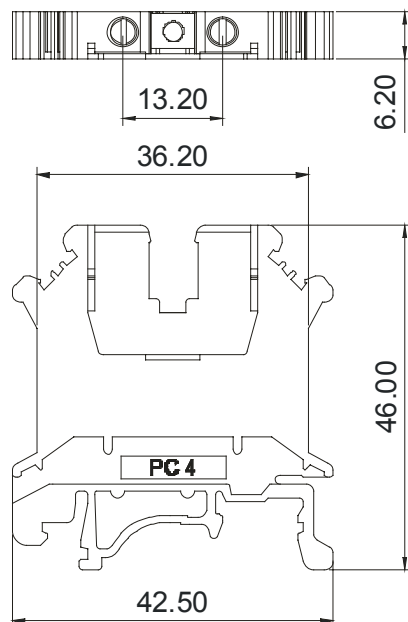

Approval

Capability

Standard

Rated Voltage

Rated Current

Wire size

T/W/End plate

Height(mm)(NS35:7.5/NS35:15/NS32)

Rated surge voltage/Contamination Class

Stripping length

Screw thread/Tightening torque

Internal cylindrical gage

Insulating Material/Inflammability class



UL

600V

30A

24-10AWG

IEC

800V

32A

0.2-4.0mm²

6.2/42.5/1.6mm

47/54.5/52mm

8KV/3

8mm

M3/0.5N.m/4.5Lb-in

A4

PAV-0

Specification

(1)Terminal block

(2)End cover

2-P

3-P

5-P

10-P

(4)Step bracket

2-P

3-P

10-P

(6)Isolator bridge bar,10P

(7)Bridge bar isolator

(8)Switching bridge

(9)Separating plate

(10) Separating plate, width 1.5mm

(11)Test plug socket

(12)Test plug socket insulated

(13)Zack strip

Model

PC 4

D-PC 2.5

FBI 2-6

FBI 3-6

FBI 5-6

FBI 10-6

EB 2-6

EB 3-6

EB 10-6

ISSBI 10-6

IS-K4

USBR 2-7

TS-K

ATP-PC

DSB 3/10/4

DSBJ 3/13/4

ZB6

Pieces

50

200

150

100

50

25

100

100

50

10

100

1

1000

50

100

100

250

HOW TO ORDER :




Series No.

No. of pole

Color

1	Gray	4	Green	7	Trans- parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	white



DEGSON ELECTRONICS CO., LTD.

NAME

PC 4