


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
A1	-		B2	NEW CAD-DRAWING CREATED	08MAY2003	- -

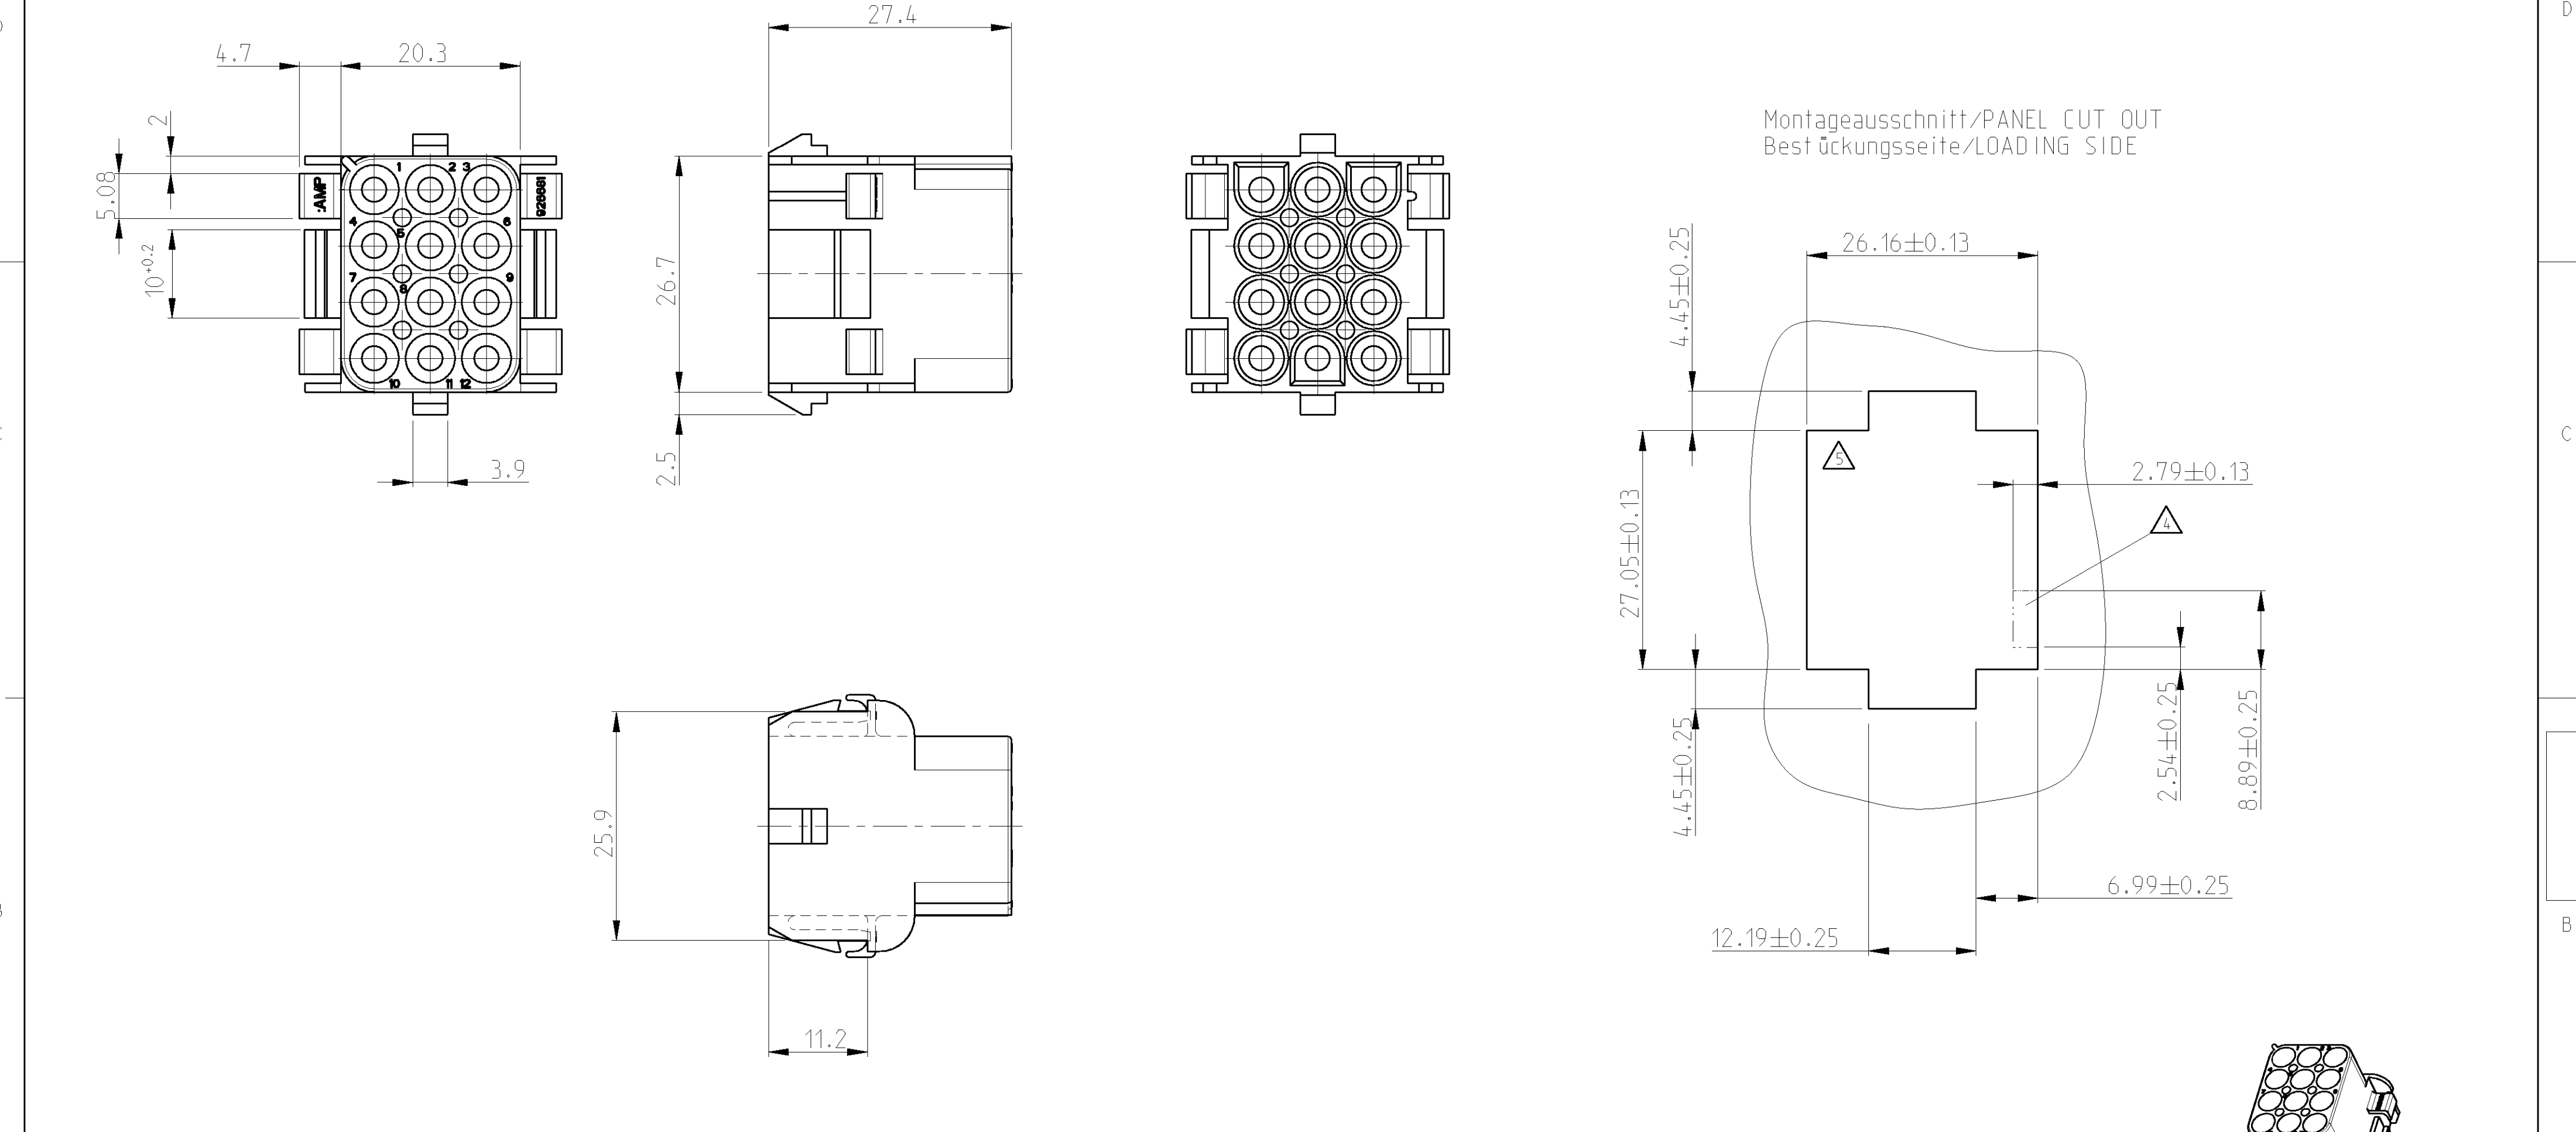

- Bemerkungen
NOTES
- 1

Geeignet für UMNL Stift- und Buchsenkontakte
BEEN SUITABLE FOR UMNL PIN- AND SOCKET CONTACTS
- 2

Empfohlene Blechstärke 0.75 - 2.3 mm
RECOMMEND SHEET METAL THICKNESS 0.75 - 2.3 mm
- 3

Gehäuse muß in Stanzrichtung eingeführt werden
HOUSING MUST BE INTRODUCED TO PUNCHING DIRECTION
- 4

Für verschlüsseltes Einsetzen der Gehäuse
FOR CODED USING OF THE HOUSINGS
- 5

Position von Kammer 1 bei verschlüsseltem Einsetzen
POSITION OF CAVITY 1 FOR CODED USING
- 6

Neues Material (Phosphor und Halogen frei)
NEW MATERIAL (PHOSPHORUS AND HALOGENEOUS FREE)
- | | | | |
|----------|------|-------------------------------|-----------------|
| 926681-5 | B | PA6.6 UL94 V-2 | natur/NATURAL |
| 926681-4 | B | PA6.6 UL94 V-2 DURETHAN VPKU2 | weiß/WHITE |
| 926681-3 | B | PA6.6 UL94 V-0 | 6 natur/NATURAL |
| 926681-2 | A | PA6.6 UL94 V-0 | 6 schwarz/BLACK |
| 926681-1 | A | PA6.6 UL94 V-2 ZYTEL E101 | natur/NATURAL |
| PART NO. | REV. | MATERIAL | COLOR |

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN Abraham.G.	08MAY03	tyco Electronics		tyco Electronics AMP GmbH D - 64625 Bensheim	
		CHK Kampmann.H.	09MAY03			NAME 12-pol. UMNL Aufnahmegehäuse UMNL 12-WAY CAP HSG	
		APVD -	-	PRODUCT SPEC 108-1031		SIZE A2	
				APPLICATION SPEC 114-18011		CAGE CODE 00779	
				WEIGHT 9.5 g		DRAWING NO 926681	
				CUSTOMER DRAWING		RESTRICTED TO -	
				SCALE 2:1		SHEET 1 OF 1	
						REV B2	