


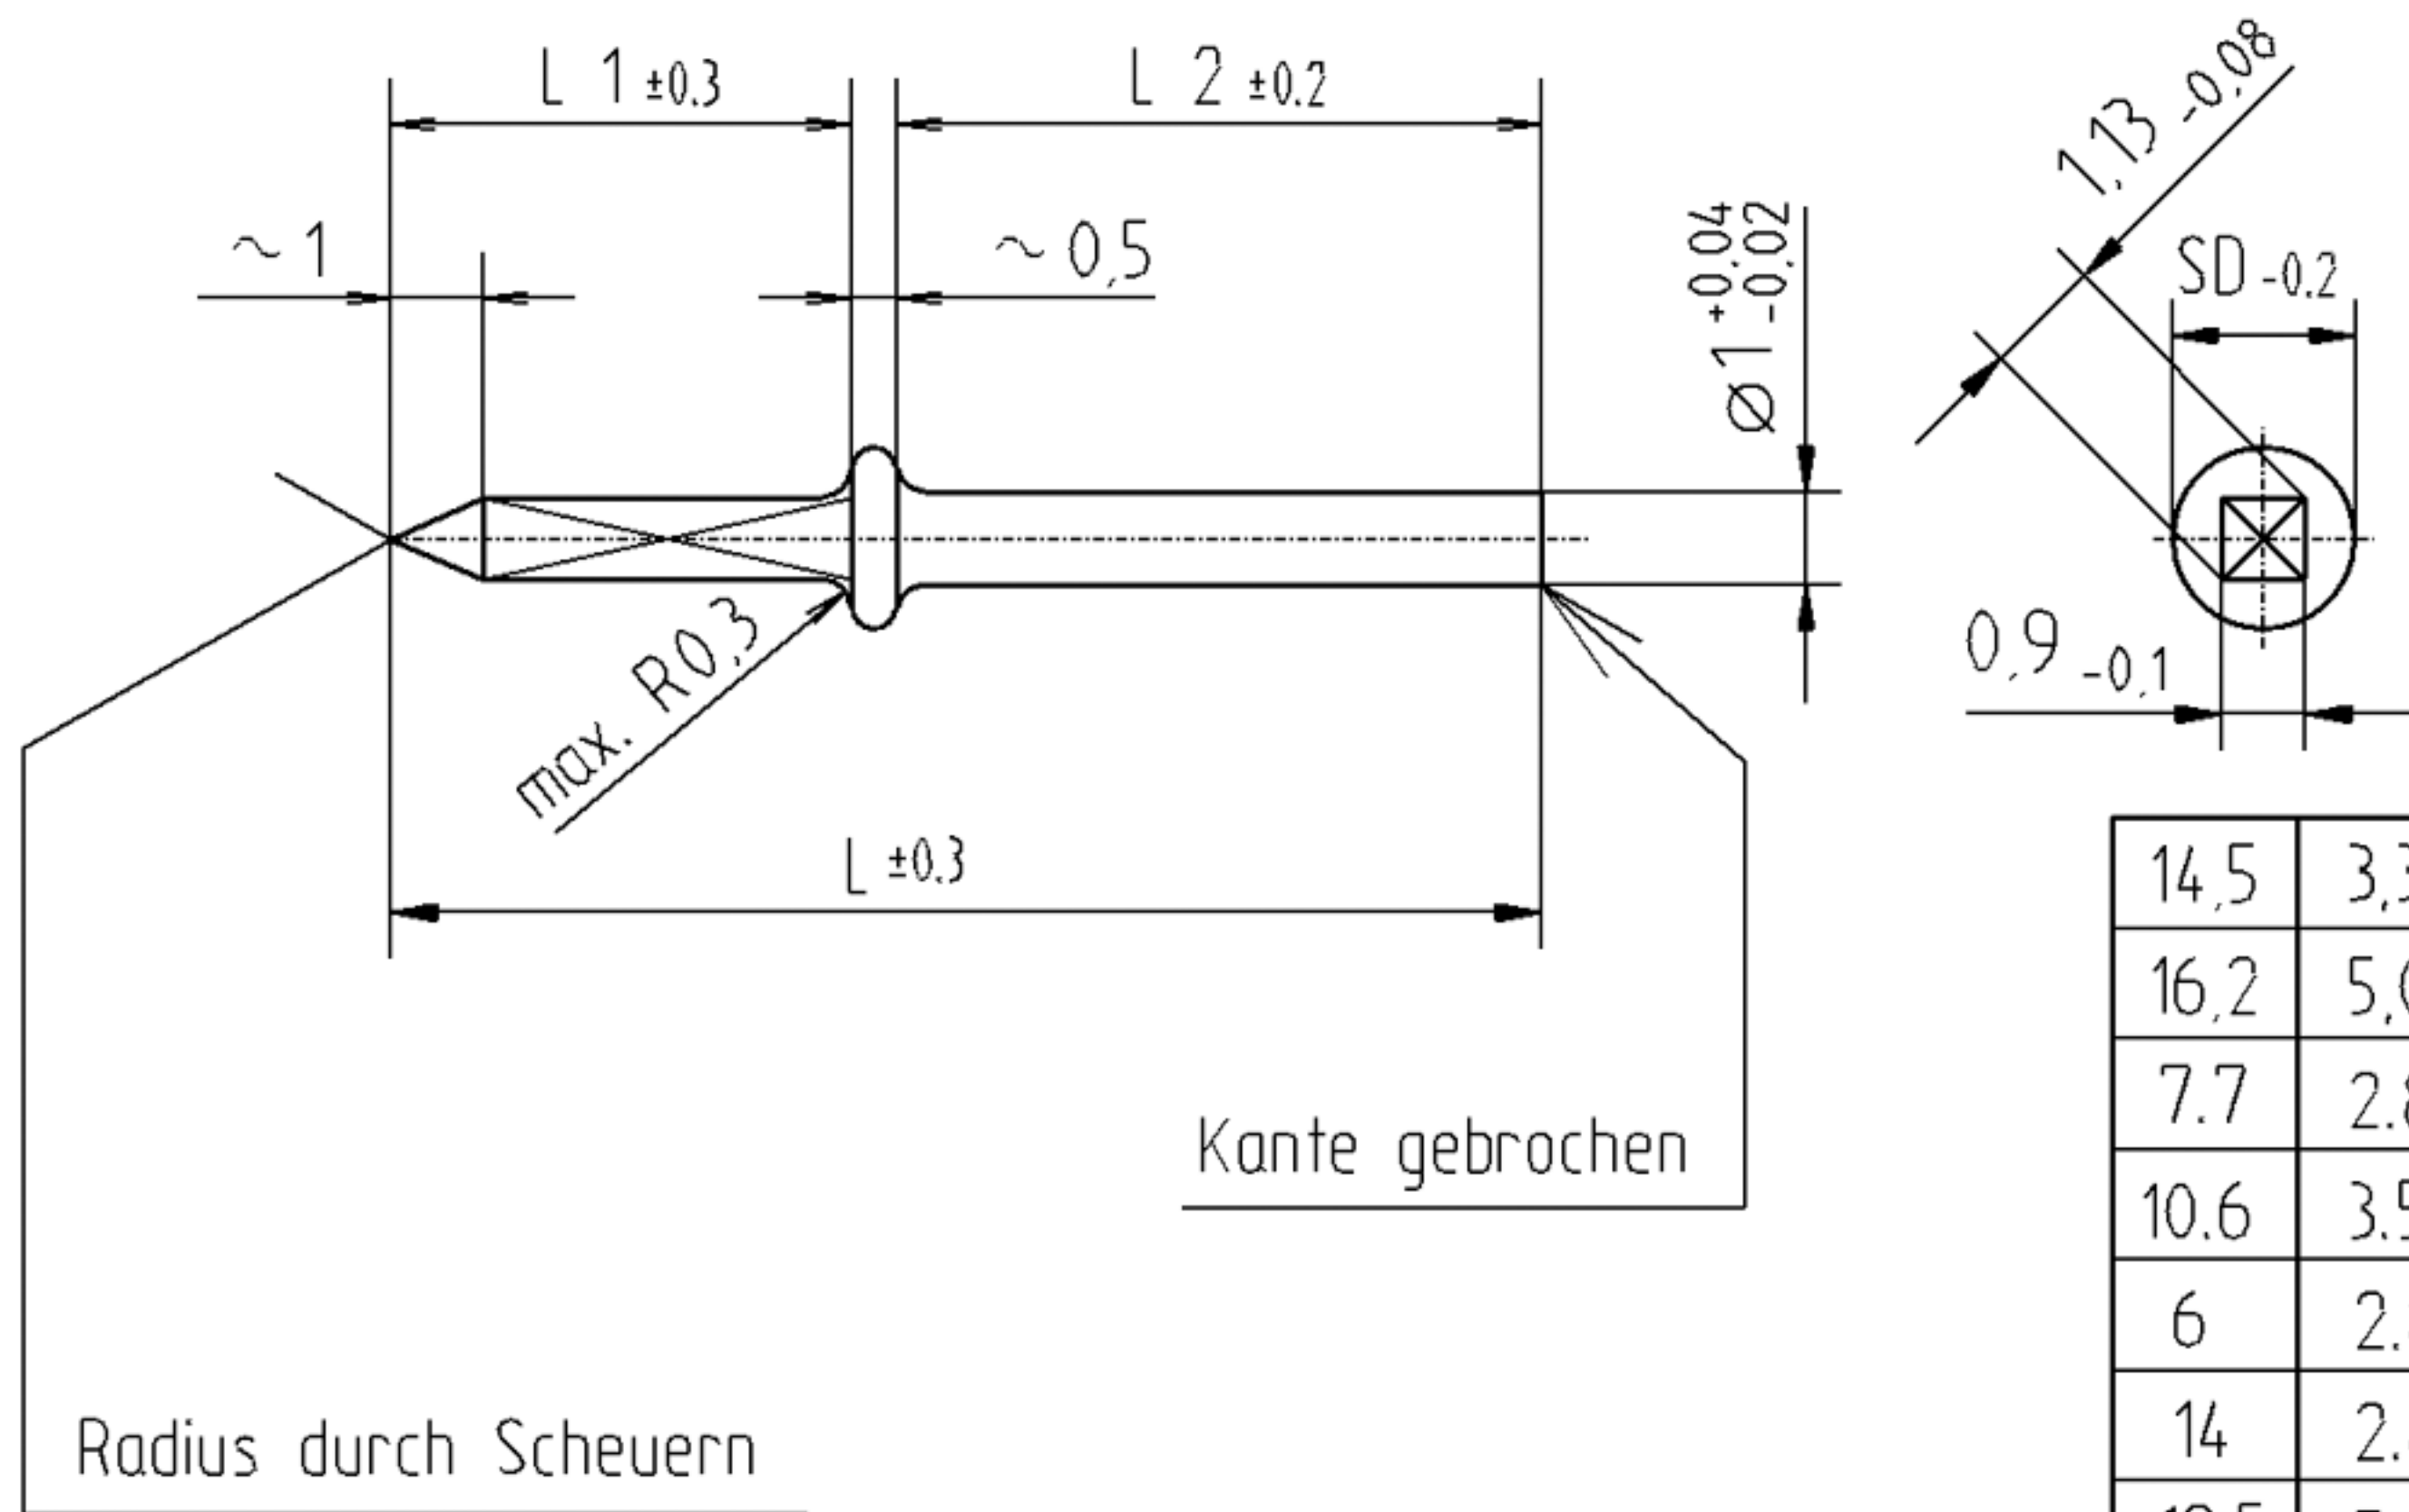

14,5	3,3	10,7	2	80-1588-01
16,2	5,0	10,7	2	80-1588-91
7.7	2.8	4.4	1.9	80-1588-81
10.6	3.5	6.6	2	80-1588-71
6	2.8	2.8	2	80-1588-61
14	2.8	10.7	2	80-1588-51
12.5	5.0	7.0	2	80-1588-31
11	4.5	6.0	2	80-1588-21
10	3.5	6.0	2	80-1588-11
L	L1	L2	SD	Artikel-Nr.

gezeichnet	6.1.94	Völkel	Werkstoff CuZn37 F44	OSTERRATH GmbH & Co.KG Verbindungstechnische Präzision D-57334 BAD LAASPHE				
geprüft								
Maßstab 5:1	Benennung Kontaktstift			Oberfläche (dm ² /1000)	Allgemeintoleranz DIN ISO 2768 m		Zeichnung - Artikel Nr. 80-1588-xx	Index E