
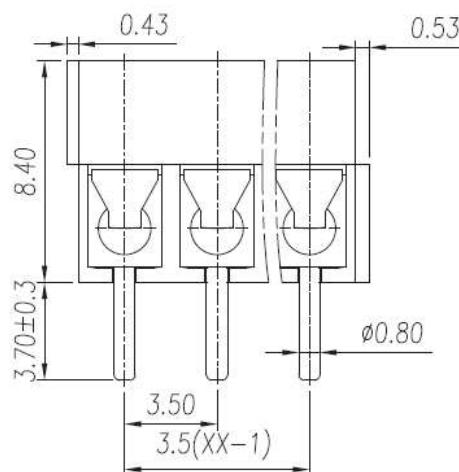



P.C.B. LAYOUT

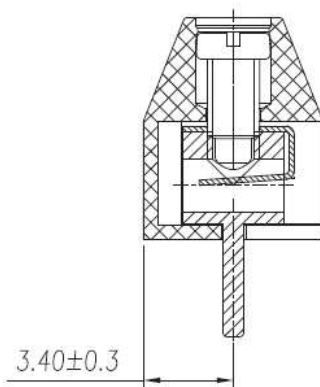

UL/CUL 技术参数		UL/CUL Technical Data			cRU [®] US		
等级	Use Group	B	C	D			
额定电压	Rated Voltage [V]	125	-	-			
额定电流	Rated Current [A]	10	-	-			
接线范围	Wire Range	24-18					
单/多芯线	Solid/Stranded [AWG]						
耐电压	Withstanding Voltage	1250V/1Min					
IEC 技术参数		IEC Technical Data			DVE		
过电压类别	Overtoltage Category	III	III	II			
污染等级	Contamination Class	3	2	2			
额定电压	Rated Voltage [V]	160	250	320			
额定电流	Rated Current [A]	13.5	13.5	13.5			
额定冲击电压	Impulse withstand voltagea [KV]	2.5	2.5	2.5			
导线截面积	Conductor cross section	0.5-1.0					
硬质/柔性导线	Solid/ flexible [mm ²]						
材料		Material					
绝缘材料	Insulation Material	PA66					
阻燃等级	Imflammability	UL94V-0					
导体材料	Contact Material	铜合金 Copper alloy					
导体表面镀层	Contactive Coating	镀锡 Sn Plated					
一般参数		Other Data					
间距	Pitch / 极数 Poles [mm] / [P]	3.5 / 02-24					
剥线长度	Stripping Length [mm]	5-6					
螺丝	Screw/ 扭矩 Torque(Max) [N.m]	M2/0.2					
工作温度	Operating temperatur [°C]	-40~105					
引针尺寸	Pin Dimensions [mm]	Ø0.8					
PCB板孔径	PCB Hole Diameter [mm]	Ø1.0					

					TOLERANCE	UNIT	mm		
					X.X	± 0.30	SIZE	A4	
					X.XX	± 0.20	Orthographic Projection		NAME
					X.XXX	± 0.15			Terminal Block
REV	DATE	MODIFICATION HISTROY	CHANGE	APPROVE					PART NO