


REV.	DATE	DESCRIPTION
NC	02/15/03	INITIAL RELEASE

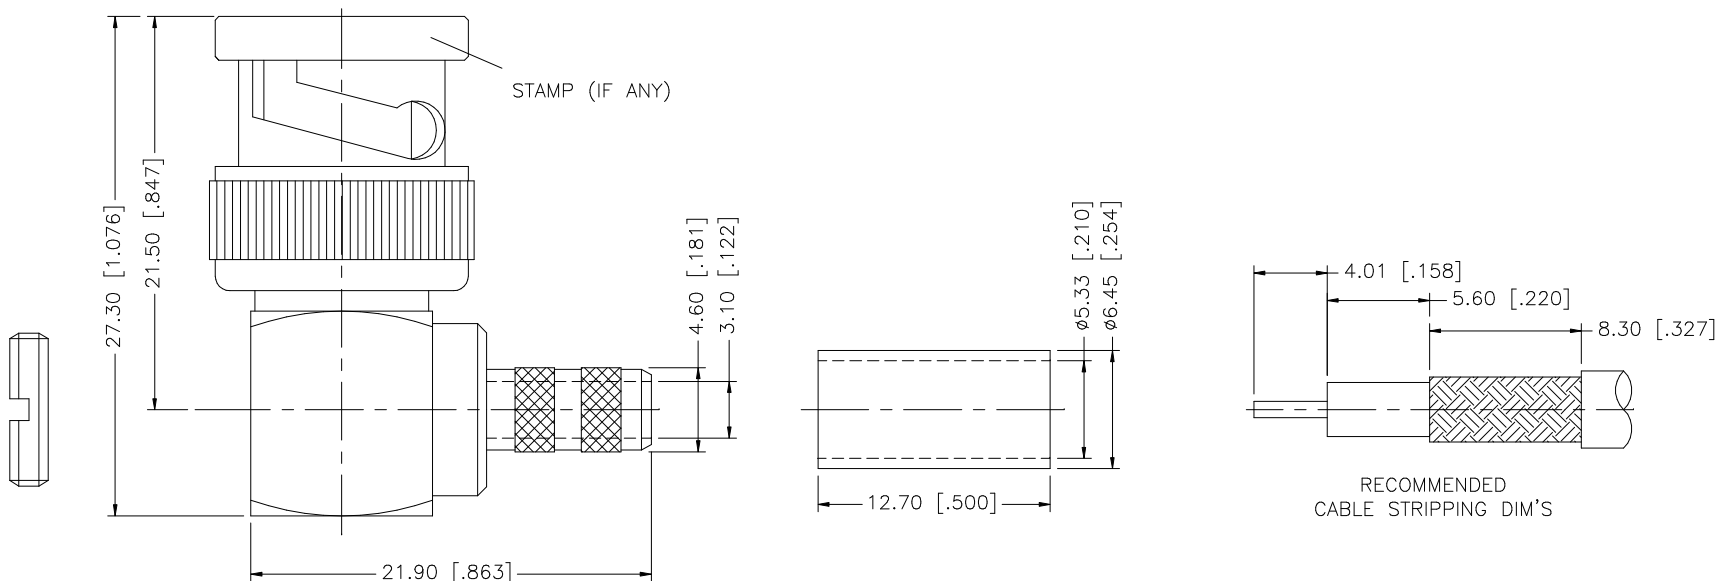

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CENTER CONTACT TO SOLDER

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
8					DRAWN	G.R.S.	02/15/03							
7					CHECKED					PART DESCRIPTION BNC R/A CRIMP PLUG (FOR RG-58/U, 141/U CABLE)				
6					ISSUED									
5	NUT	BRASS	NICKEL	1	SHEET	1 OF 1				PART NO. 112162				
4	FERRULE	COPPER	NICKEL	1										
3	CONTACT PIN	BRASS	GOLD	1					DWG. NO. 112162.DWG					
2	INSULATOR	DELTRIN	NATURAL	1										
1	BODY	BRASS	NICKEL	1					REV. NC		SIZE A		SCALE NA	
DESCRIPTION		MATERIAL	FINISH	QTY										
					CAD FILE C:/112/112162.DWG									