

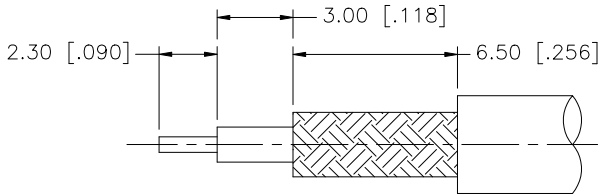


REV.	DATE	DESCRIPTION
NC	07/18/97	INITIAL RELEASE
A	07/31/07	UPDATE DRAWING FORMAT

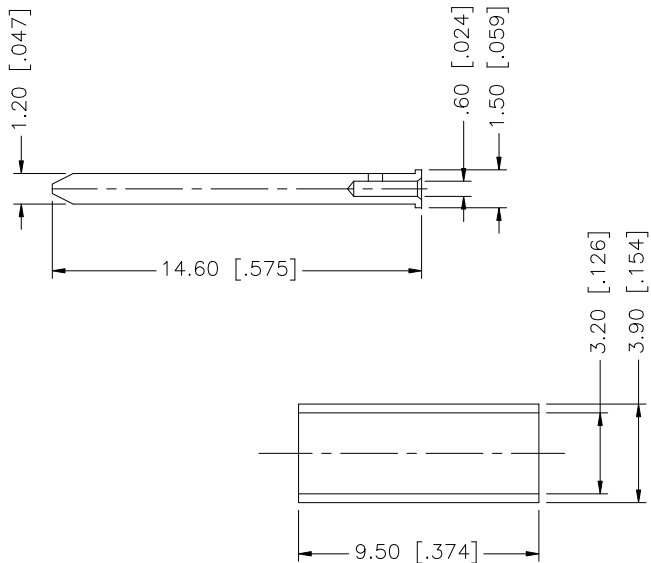

RECOMMENDED
CABLE STRIPPING DIMS

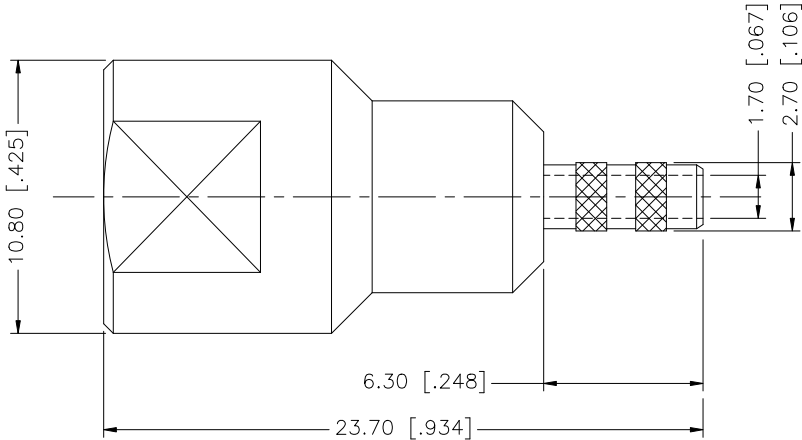

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex									
7						DRAWN	G.R.S.						07/31/07				
6						CHECKED								PART DESCRIPTION FME CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U CABLE)			
5						ISSUED											
4	FERRULE	BRASS	NICKEL	1			SHEET	1 OF 1		PART NO. 192114							
3	CONTACT PIN	BRASS	GOLD	1													
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO. 192114.DWG REV. A SIZE A SCALE NA								
1	BODY	BRASS	NICKEL	1		CAD FILE											
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	C:/192/192114.DWG											