

Material

- Item **(a)** Clamp: Brass(CuZn) Ni plated
- Item **(b)** Terminal screw: Steel Zinc plating “-” slot type
- Item **(c)** Female contact: PhBz, Bright Tin plated over Nickel plated
- Item **(d)** Terminal Cover: Thermoplastic (UL94V-0)
- Item **(e)** Terminal housing: Thermoplastic (UL94V-0)

Electrical cULus/VDE/TUV

- Voltage rating: 300VAC/300VAC/300VAC
- Current rating: 12A/20A/20A
- Wire range: 2.5mm²/0.34~2.5mm²
- Solid wire(AWG): 12~24
- Stranded wire(AWG): 12~24
- Torque: 5Lb-In/0.5Nm/0.56Nm
- Screw: M3
- Wire strip length: 7~8mm
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Safety Approval: cULus  VDE  TUV 
- Use with 0Q1.0x1.0mm square pin, Withdrawal force:200 ~ 500gf /pole
- Critical dimension: 

No. OF POLES -
02: 2 POLES

24: 24 POLES

Color



0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL 7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

→ G RoHS compliant
(lead<4%)
In copper Alloy


```

➔000 0  Standard @ Logo
000 A  Standard ANY Logo
0091  Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

```

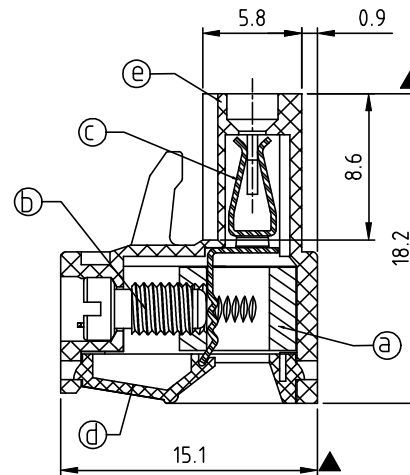

SECTION P-P

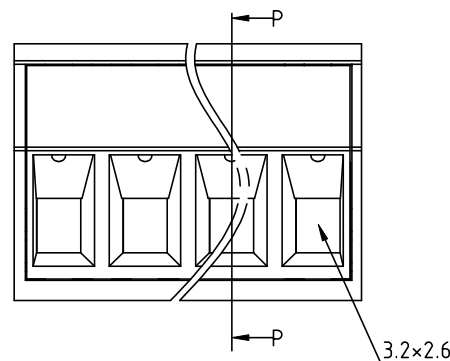

DIM L	$N \times 5.08 + 0.1$
DIM A	$N \times 5.08$
DIM B	$(N-1) \times 5.08$

Poles	Tolerance	
	DIM B	DIM L&DIM A
2p	±0.10	±0.20
3p-6p	±0.15	±0.20
7p-12p	±0.20	±0.25
13p-18p	±0.25	±0.30
19p-24p	±0.30	±0.40

Amphenol **ANYTEK**

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TJ-5.08 mm Series (Without flange) 2-24P						
PART NO.	TJxx51x3xxxxG			DWG NO.	8TJ0007		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Chen Bo 04/12-21	Chen Bo 04/12-21		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
				SHEET: 01/01	REV: I	X.XX	±0.10
						X°	±1°