



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-710065	2006/12/15	DongYaLi	Move DOR0038SI70 To ZSE00100585
C	LEN1350211	2013/05/14	Yulong	Change the Dimension




Screw L=5.0 For Panel Thickness

Under 1.2mm
適用板厚為 1.2mm 以下





Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm
適用板厚為 1.2~2.0mm

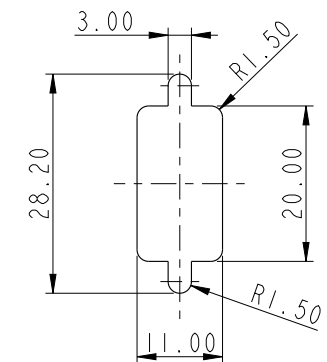

Recommended Panel Cut-Out
建議挖孔尺寸

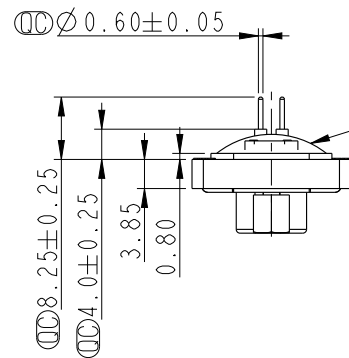

With Liquid Glue
點防水膠

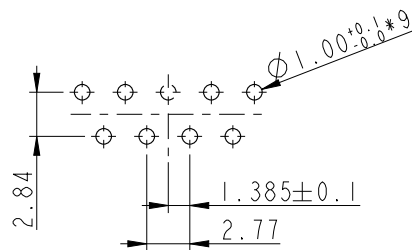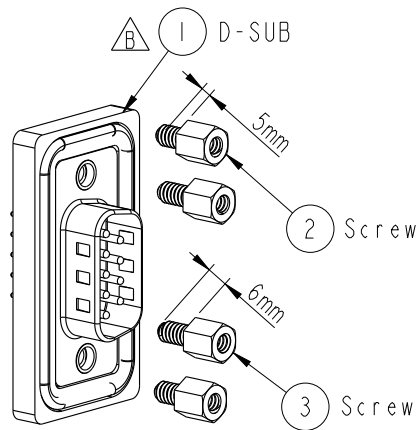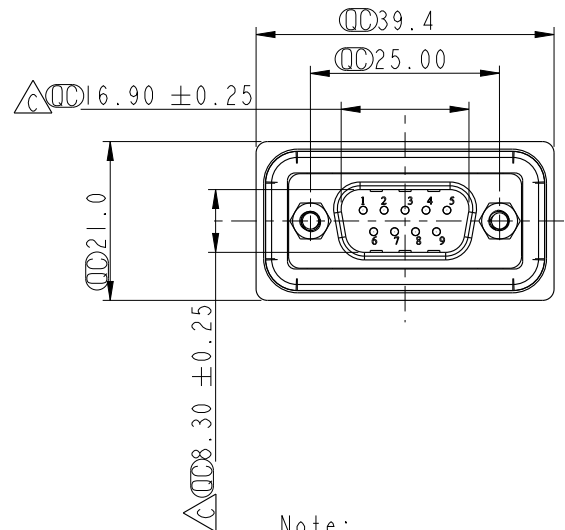


9 Pin Male Connector
PCB Pin Layout

Scale 2:1

Note:

- * Ø Important Dimension.
- * Waterproof Rate : IP68
IP68:1M of depth of water 24 hours
(防水等級: IP68)
(1米水深24小時)
- * Do Mating Test After Glued
點膠後, 須作對插測試
- * D-SUB Conn. : Black Core , PBT
- * Plastic Jacket : Black , Nylon+GF
- * Pin : Copper Alloy , Gold Plated
- * Ring : Light Blue, Silicone
- * Screw : Copper Alloy, Nickel Plated, #4-40 UNC



UNIT:mm		TITLE D-SUB Conn.
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE I:1	SIZE A4
	REV. C	MC-REV. A.4
		QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO SDB-09PMMP-SL8001	DRAWN BY Yulong_wang	DATE 2013-05-14
DWG NO SDB-09PMMP-SL8001	CHECKED BY Victor	DATE 2013-05-14
CUSTOMER ALTW	APPROVED BY Maslow	DATE 2013-05-14