


Anschlussdiagramm / *Wire diagram*

Artikel-Nr. / *Item No.*	Länge ± Toleranz / *Length ± Tolerance* (L ± T)	Innenleiter / *Inner conductor*
58267	500 ± 20 mm	30 AWG (1/0.254BC x 1P + E + A + MYLAR) x 5 + 1/0.254BC x 4C + AEB; B = 0.12 mm / 9 x 16 AL-MG
58263	1000 ± 30 mm	30 AWG (1/0.254BC x 1P + E + A + MYLAR) x 5 + 1/0.254BC x 4C + AEB; B = 0.12 mm / 9 x 16 AL-MG
58264	2000 ± 50 mm	30 AWG (1/0.254BC x 1P + E + A + MYLAR) x 5 + 1/0.254BC x 4C + AEB; B = 0.12 mm / 9 x 16 AL-MG
58265	3000 ± 70 mm	29 AWG (1/0.28BC x 1P + E + A + MYLAR) x 5 + 1/0.254BC x 4C + AEB; B= 0.12 mm / 9 x 16 AL-MG

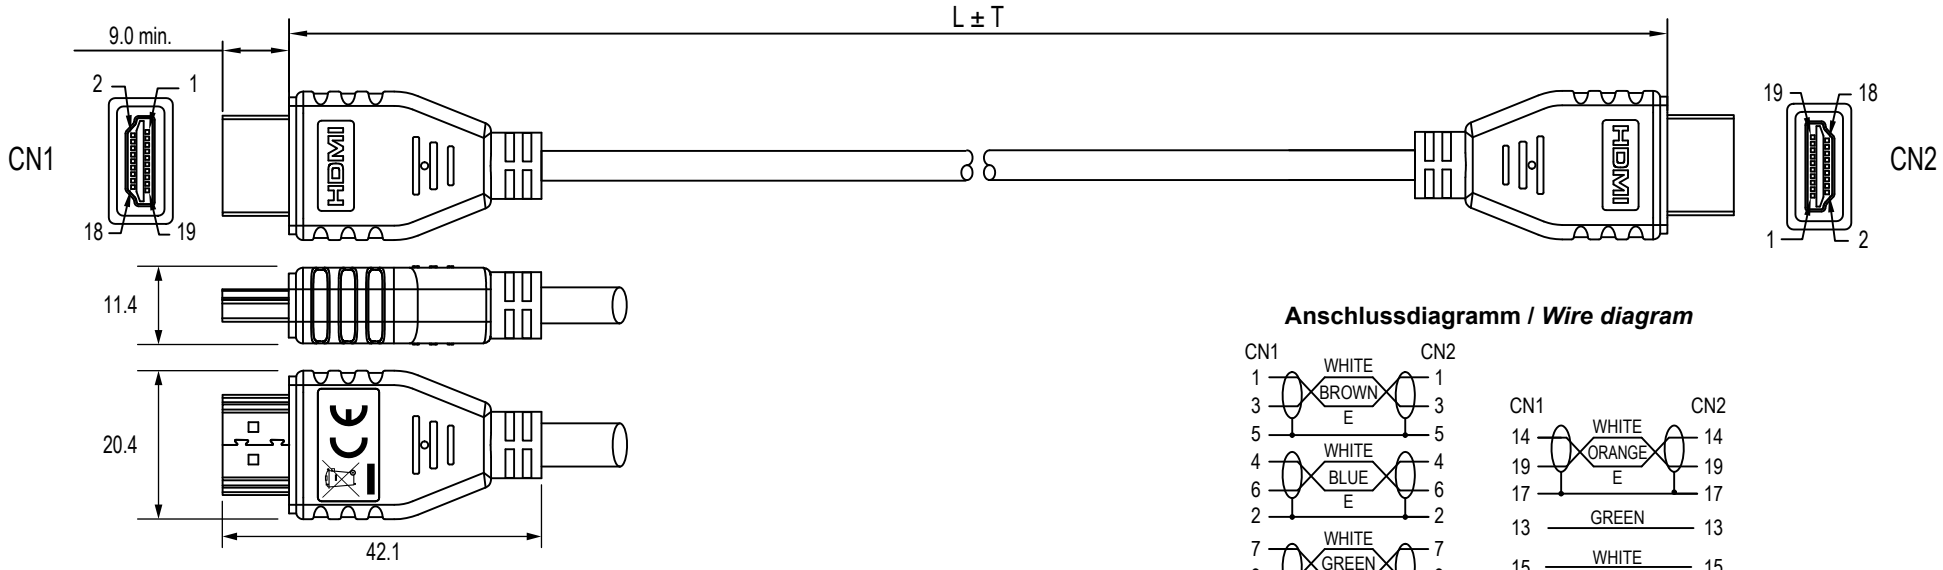

Ultra High-Speed HDMI™ Kabel mit Ethernet, zertifiziert

- Series 2.1 8K
- HDMI zertifiziert, offiziell lizensiert und getestet
- beidseitiger Knickschutz
- unterstützt Farbraum RGB mit je 14 Bit, Farbunterabtastung YCbCr 4:2:0, Video-Kompression DSC 1.2

Anschlüsse:	2x HDMI™-Stecker (Typ A)
Kontakte:	vergoldet
Material:	PVC 88A, LDPE
Anzahl Schirmungen:	2x, Geflecht (Alu) 144x
Ferritkern:	nein
Max. Auflösung:	4K Ultra HD 2160p (120 Hz), 8K Ultra HD 4320p (60 Hz)
Max. Übertragungsrate:	48 Gbit/s
Unterstützte Standards:	HDR (High Dynamic Range), HDMI™ Ethernet Channel (HEC), 4K 3D, 21:9 Cinemascope, HDCP 2.2, Enhanced Audio Return Channel (eARC), Consumer Electronics Control (CEC)
Betriebstemperatur:	-10°C ~ +80°C

Ultra High Speed HDMI™ Cable with Ethernet, certified

- *Series 2.1 8K*
- *integrated Ethernet channel saves additional network or audio cables*
- *kink protection on both sides*
- *supported color space RGB with 14 Bit, color subsampling YCbCr 4:2:0, Video-Compression DSC 1.2*

Connectors:	*2x HDMI™ male (type A)*
Contacts:	*gold-plated*
Material:	*PVC 88A, LD-PE*
Number of shieldings:	*2x, braid (aluminium) 144x*
Ferrite core:	*no*
Resolution:	*4K Ultra HD 2160p (120 Hz), 8K Ultra HD 4320p (60 Hz)*
Max. transmission rate:	*48 Gbit/s*
Supported standards:	*HDR (High Dynamic Range), HDMI™ Ethernet Channel (HEC), 4K 3D, 21:9 Cinemascope, HDCP 2.2, Enhanced Audio Return Channel (eARC), Consumer Electronics Control (CEC)*
Operating temperature:	*-10°C ~ +80°C*

Änderungen			Datum	Name
Datum	Name	gez.:	29.07.2021	aw
		gepr.:	29.07.2021	aw
		Norm:		
		Änderungen vorbehalten / *Subject to change*		

Bezeichnung

HDMI 2.1 Kabel Zert. XXXX Xm STD sw

Zeichnungs-Nr.:

Blatt 1 von 1

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА