




|                       |                        |                                                                                   |                   |                                                                                    |                                                                                     |
|-----------------------|------------------------|-----------------------------------------------------------------------------------|-------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Rating                | 16A 125VAC, 10A 250VAC |  | Mounting Hole     |  |  |
|                       | 10A 125VAC, 6A 250VAC  | CQC                                                                               |                   |                                                                                    |                                                                                     |
|                       | 10(4)A 250V~           |  |                   |                                                                                    |                                                                                     |
|                       | 20A 12V DC, 10A 24VDC  |  |                   |                                                                                    |                                                                                     |
| Contact Resistance    | 50m ohm Max.           |                                                                                   | Thickness:2.0~3.0 | Thickness:0.7~3.0                                                                  |                                                                                     |
| Insulation Resistance | DC 500V 100M ohm Min.  |                                                                                   |                   |                                                                                    |                                                                                     |
| Dielectric Strength   | AC 1500V 1 minute      |                                                                                   |                   |                                                                                    |                                                                                     |
| Operation Temperature | -25°C~85°C             |                                                                                   |                   |                                                                                    |                                                                                     |
| Switch Function       | 3P SPDT ON-ON          |                                                                                   |                   |                                                                                    |                                                                                     |



Material:






Frame: Nylon#66, Black

Actuator: Nylon#66, Black

Terminals: Cooper Alloy, Silver plating

Printed: None

Circuit Diagram

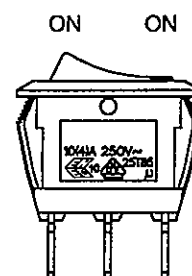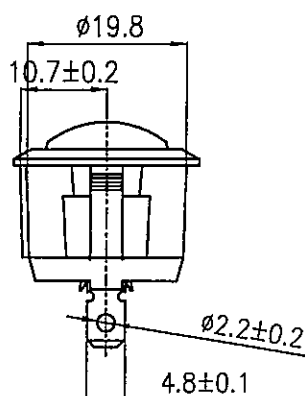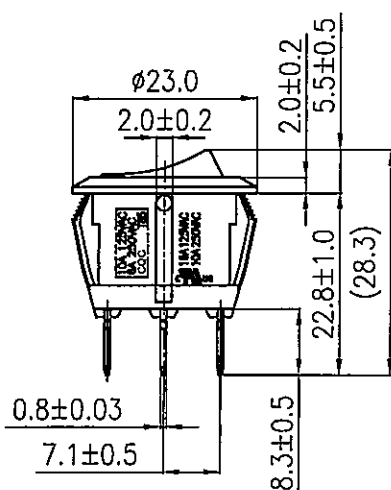

Tolerances  $\pm 0.3\text{mm}$  Unless Otherwise Specified

| 03/18/'15 | 曹盈芳     | 依營業需求增加10A 24VDC                                                        |              |         |                                |  |
|-----------|---------|-------------------------------------------------------------------------|--------------|---------|--------------------------------|---------------------------------------------------------------------------------------|
| 07/01/'14 | 黃洋      | 增加SCI LOGO,更新圖面                                                         |              |         |                                |  |
| 04/23/'10 | 曹盈芳     | 為了整合安規取消CSA,追加ENECIVED10的溫度刻字由T85提升25T85,追加CQC,10A125VAC,6A250VAC,T85刻字 |              |         |                                |  |
|           |         | 依客戶要求Rating追加20A 12V DC                                                 |              |         |                                |  |
| Date      | Name    | Description                                                             |              |         |                                | No.                                                                                   |
| Drawn     | Checked | Approved                                                                | SCI BOM No.  | 1821150 | Model Name                     | ROCKER SWITCH                                                                         |
| 曹盈芳       |         | 王偉山                                                                     | Customer No. |         | Model No.                      | R13-112C-02                                                                           |
| 03/18/'15 |         | 3/18/15                                                                 | Unit         | mm      | Shin Chin Industrial Co., Ltd. |                                                                                       |
|           |         |                                                                         |              |         |                                | Rev. 3                                                                                |