

5

4

3

2


1

D

C

B

A

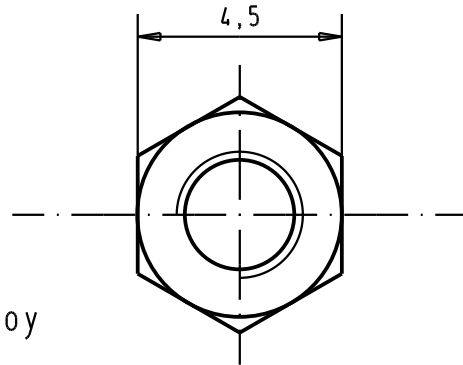

Material: Copper Alloy
Plating: Nickel

UNC 4-40



Screwing torque: max 0,7 Nm

Unscrewing torque: min 0,36 Nm

M3

Screwing torque: max 0,8 Nm

Unscrewing torque: min 0,5 Nm

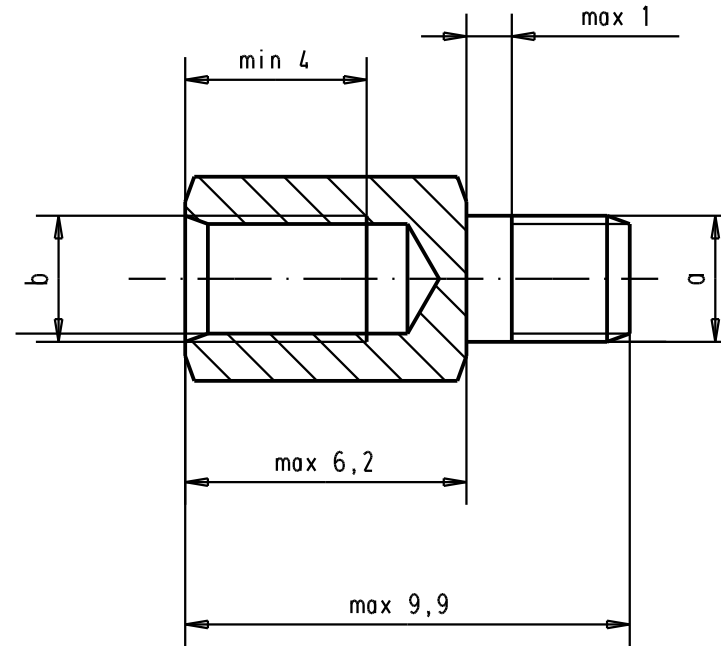

All Dimensions in mm
Original Size DIN A 4

Techn. Character.

Free size tolerances

Dat.

Name

Scale

Detail

04-11-99

PP

Insp.

Stand.

6:1

D-SUB
Screw Lock

09660009976

M3/M3

M3

M3

09660009972

4-40 UNC/4-40 UNC

4-40 UNC

4-40 UNC

09660009974

M3/4-40 UNC

M3

4-40 UNC

32116

10/06/04

JH

Part Number

Designation of
Screw Lock

a

b

26551

04-11-99

PP

Mod.

Dat.

Name

HARTING EURL

F 95972 Paris



TB

0966000997x

Sub.

Page
1/1