

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
G	14


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	AD1	REVISED PER ECO–11–004917	11MAR11	RK	HMR

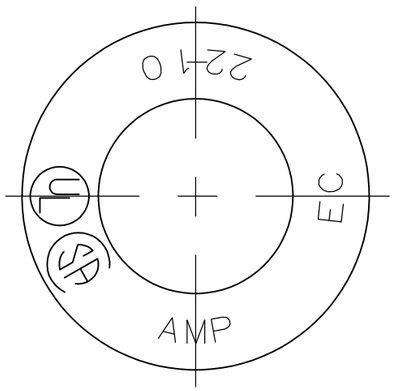

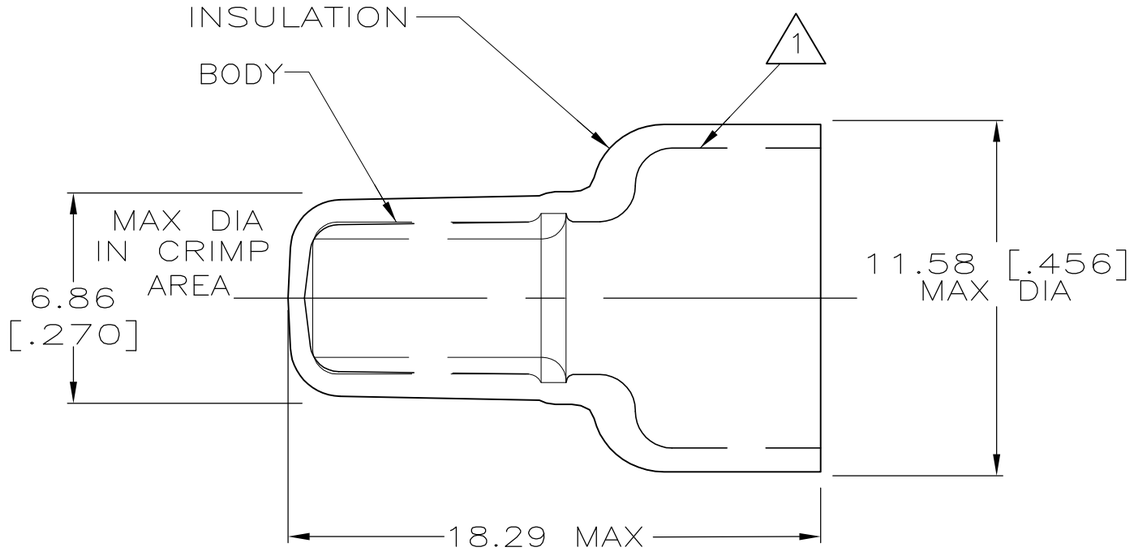

CONFIGURATION 1

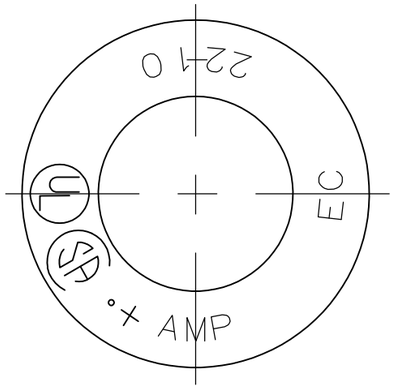

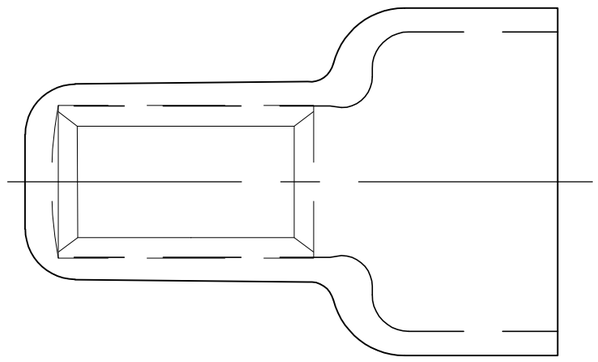

CONFIGURATION 2

1. FOR 9.53 [.375] MAX WIRE INSULATION DIA
2. SUPERSEEDED BY 328730
3. MATERIAL: BODY; COPPER PER ASTM B152
   INSULATION; NYLON
   COLOR; NATURAL
4. FINISH: BODY; TIN PL. PER ASTM B545
5. PARTS MAY CONFORM TO EITHER COFIGURATION 1 OR 2

AMP WIRE RANGE	Listed	LR7189 Certified
22–10 AWG SOLID OR STRANDED	22–10 AWG SOLID OR STRANDED	22–10 AWG SOLID OR STRANDED

QTY	DESCRIPTION	PART NO
100	LOOSE PC, BOX	8–328730–1
10000	SPECIAL PKG	2 328730–1
1500	TAPE MOUNTED	2–328730–1
2000	LOOSE PIECE	328730

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1–800–522–6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1–800–722–1111
FOR ORDER ENTRY	1–800–526–5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

MAX RECOMMENDED OPERATING TEMPERATURE: 105° C MAX

VOLTAGE RATING:
600V MAX (BUILDING & WIRING)
1000V MAX (FIXTURES & SIGNS)

CIRCULAR MIL AREA:
1.65–6.64mm² [3248–13100]
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± 0.20[.008]
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL 3 FINISH 4

DWN	G KRUPER 1/93
CHK	R HERSEY 1/93
APVD	M ELLIS 1/93
PRODUCT SPEC	UL 486 C
APPLICATION SPEC	–
WEIGHT	–

TE Connectivity

NAME: SPLICE, CLOSED END, WIRE SIZE, 22–10 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-328730	–

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV AD1

1470–19 (3/11)

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА