




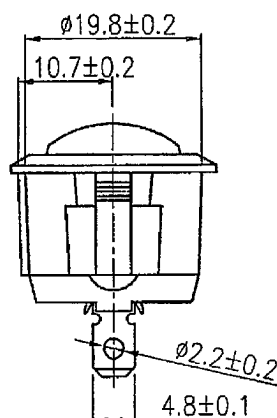
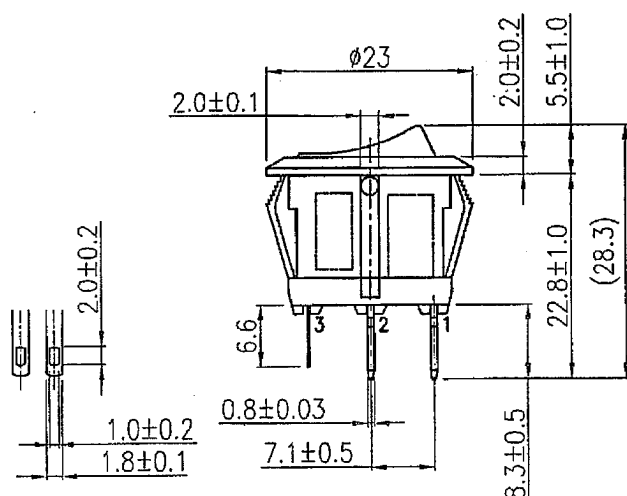



Rating	20A 14VDC	Mounting Hole	
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C~85°C		
Switch Function	4P SPST ON-OFF (LED Independent)		

Material:
Frame: Black,Nylon 66
Actuator:Black,Nylon66
Lens: Clear,PC
LED: Red

Circuit Diagram



Tolerances ± 0.3 Unless Otherwise Specified

Date	Name	Description	No.
12/6/13	周傑輝	1821260	ROCKER SWITCH
12/11/13	12/11-13	Customer No.	Model No. R13-112L-02
12/12/13	12/12-13	Unit	Rev. 0

Shin Chin Industrial Co., Ltd.