
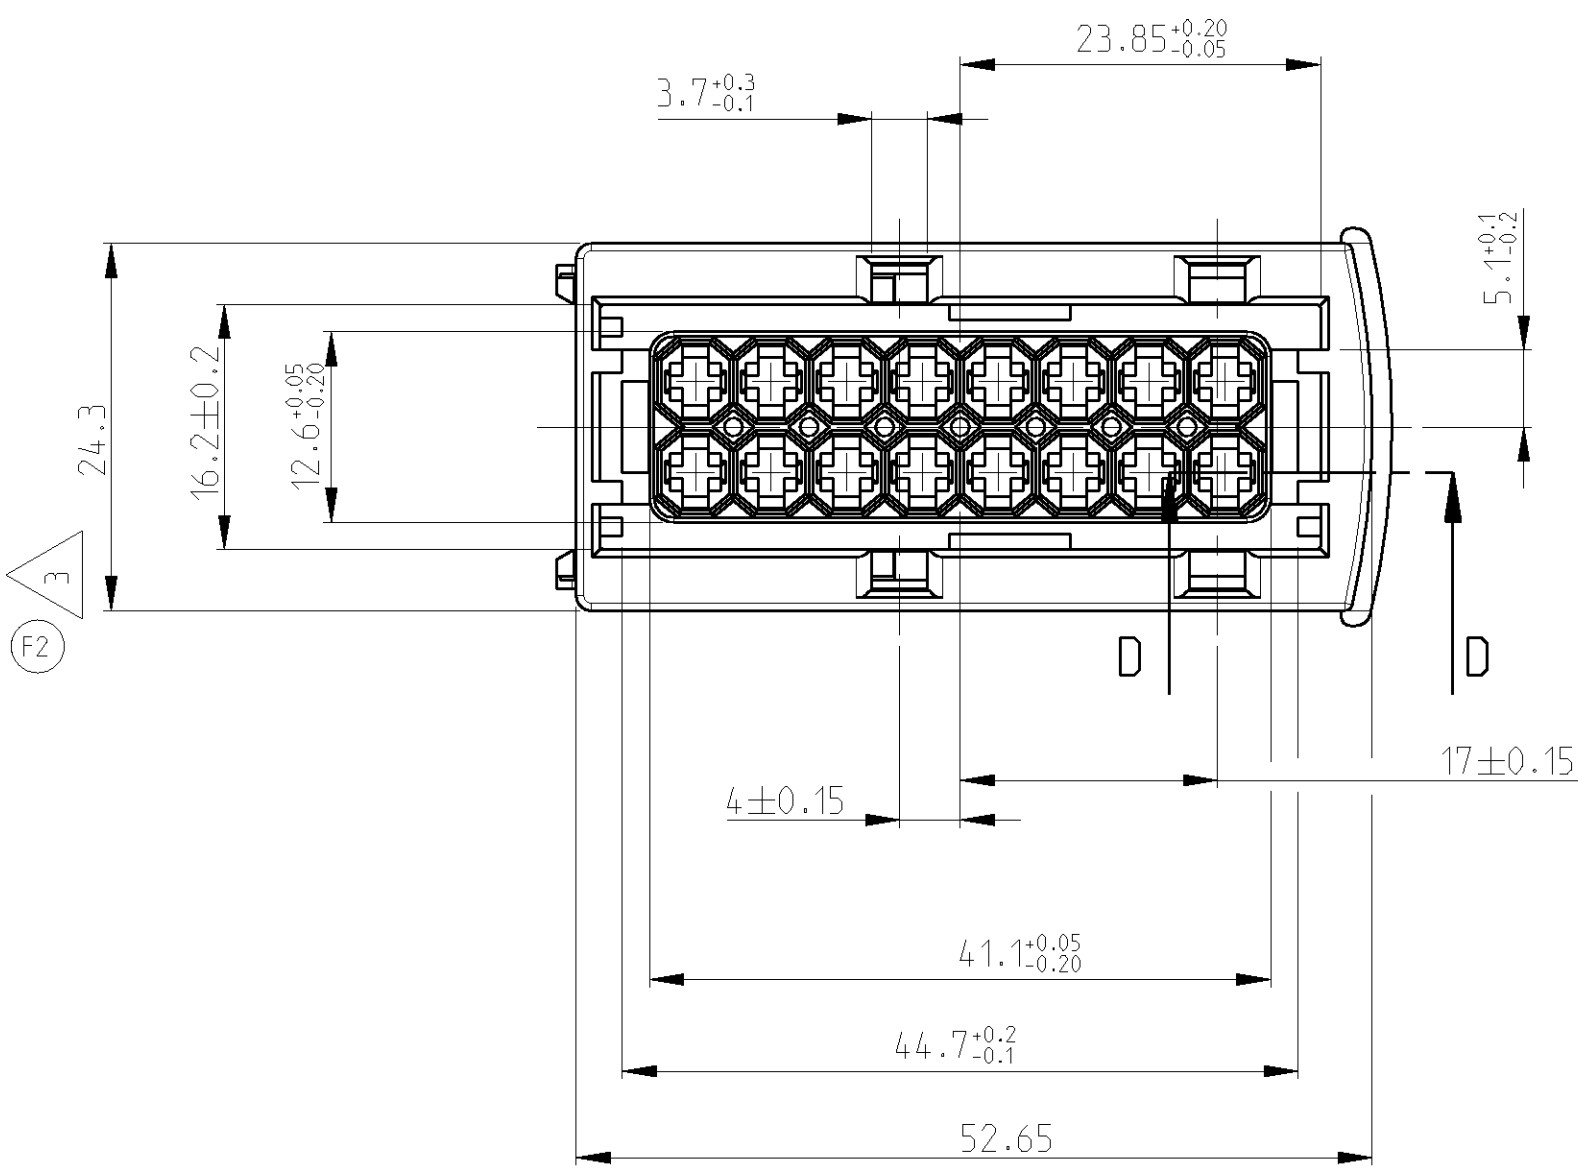
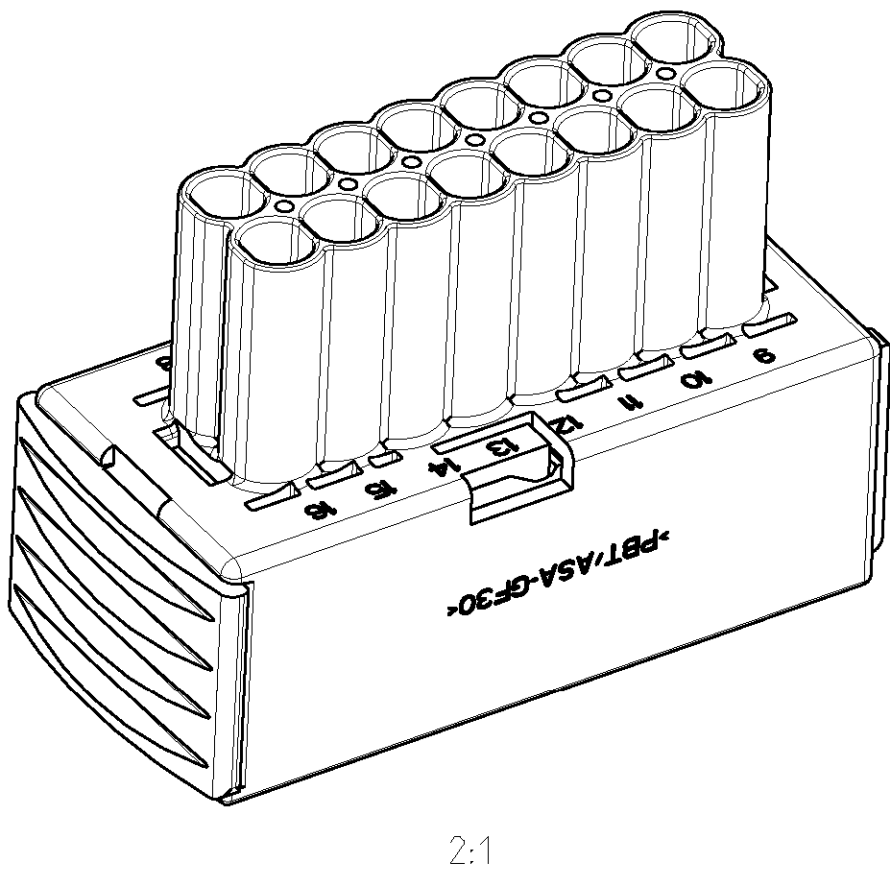
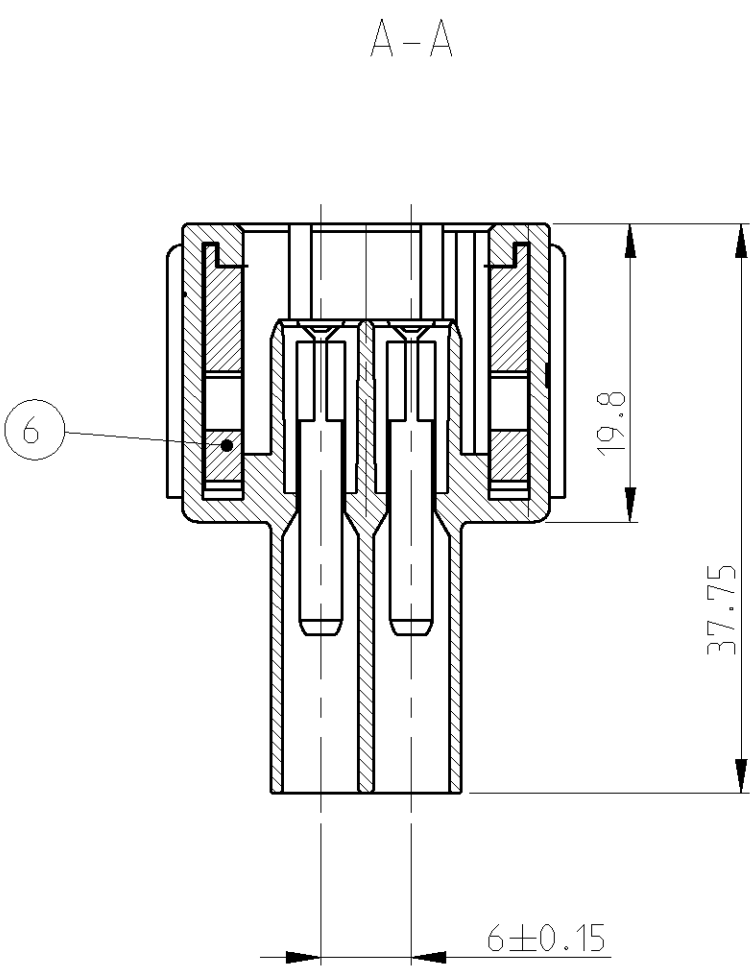
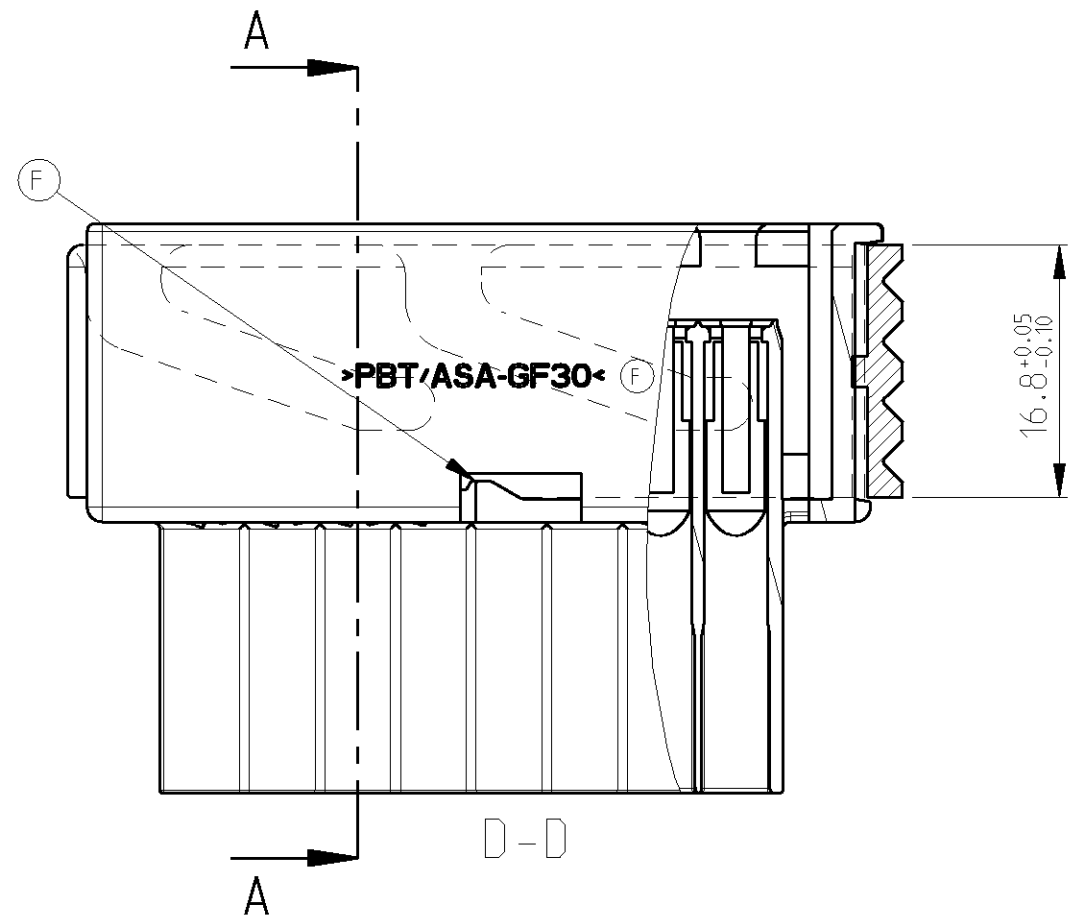


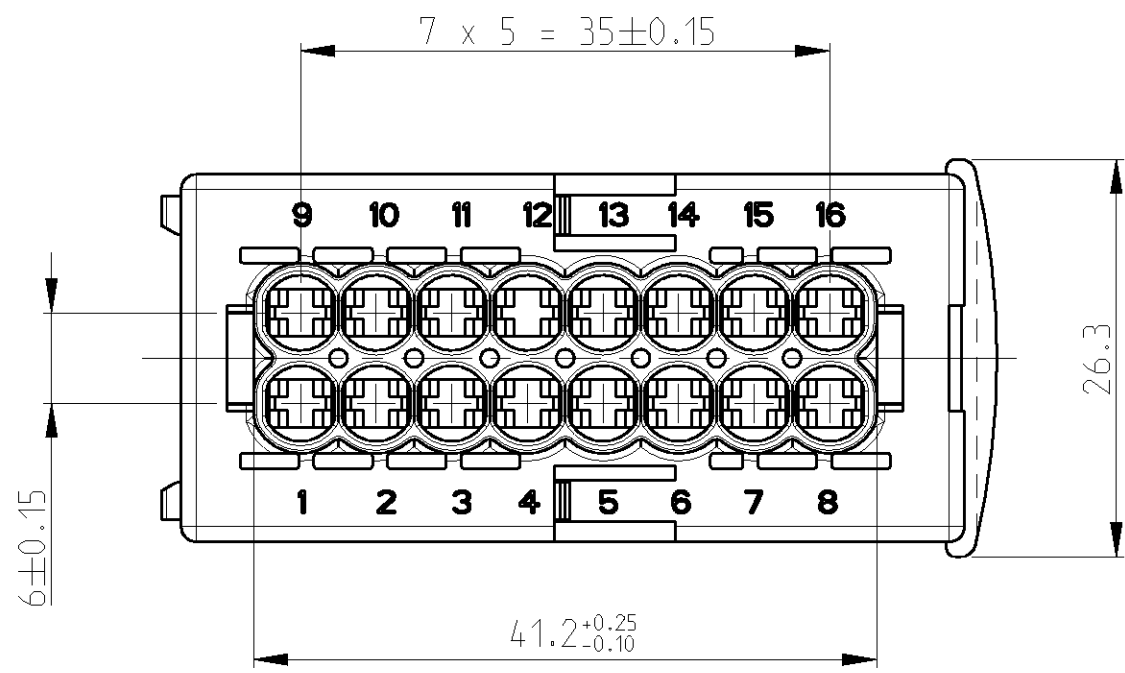

NOTES :

- 1

AU-VERSION OF CONTACT IS 1-XXXXXX-1
Au-Version des Kontaktes ist 1-XXXXXX-1
- 2

WATER TIGHTNESS ACC. GMI 12590; 5.10.3
FURTHER INFORMATIONS SEE PRODUCT SPECIFICATION 108-18102-1/...-9
Wasserdichtheit nach GMI 12590; 5.10.3
Weitere Informationen siehe Produktspezifikation 108-18102-1/...-9
- 3

Einfall bis auf 23.5mm zulässig
SHRINKAGE UP TO 23.5MM ALLOWED

JPT	1	0-0929937-1	1.5 - 2.5	CuFe 2	TINNED	0-0828905-1	WHITE	IPX 9K
JPT	1	0-0929939-1	0.75 - 1.0	CuFe 2	TINNED	0-0828904-1	LIGHT BLUE	IPX 9K
JPT	1	0-0929939-1	0.5	CuFe 2	TINNED	0-0963294-1	BLUE	IPX 9K
JPT	1	0-0929941-1	0.35	CuFe 2	TINNED	0-0963294-1	BLUE	IPX 9K
CONTACT-SYSTEM	ORDER-NO.	WIRE SIZE [mm²]	MATERIAL	FINISH	SINGLE WIRE SEAL	COLOR	WATER-TIGHTNESS	2

-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
1-964449-1	1-967242-1	F	1	PBT/ASA-GF30	RED	SLIDE	2
MATED WITH	PART NO.	REV.	PCS	MATERIAL	COLOR	DESCRIPTION	ITEM NO.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	27-SEP-1993	NAME	TE Connectivity
mm	0 PLC ±0.3 1 PLC ±0.3 2 PLC ±0.3 3 PLC ±0.3 4 PLC ±0.3	CHK	27-SEP-1993	NAME	JPT Rec.-HOUSING . 16POS.. ASSY
		APVD		NAME	JPT Bu.-Gehäuse. 16pol.. Assy
				SIZE	108-18102
				APPLICATION SPEC	114-18175
				WEIGHT	00779
				SCALE	2:1
				SHEET	1 OF 1
				REV	F3