

ROHS COMPLIANT

PLUG MARKING:




A/0

DATE REV DESCRIPTION

BY CHECK


A/0

YE/GN(line)




30000±50


YE/GN(line)



SF-82

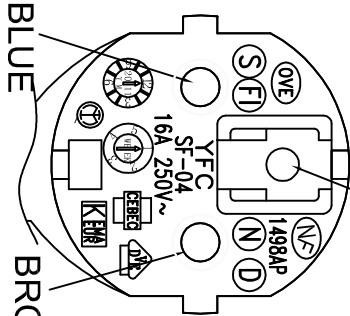

BROWN

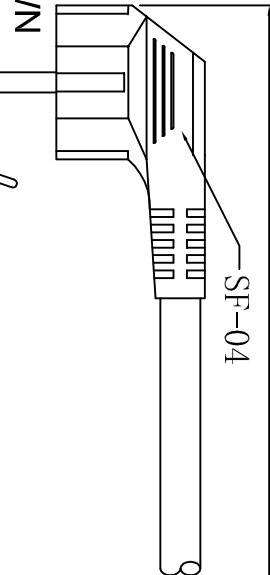


SF-04

WIRE MARKING

JACKET

INSULATION

CONDUCTOR

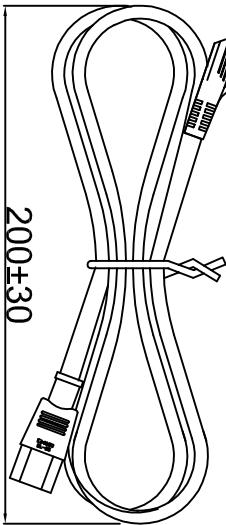

200±30

ELECTRIC TESTING:

1. 100% OPEN & SHORT TESTING.
2. INSULATION RESISTANCE: ≥50MΩ
3. VOLTAGE RATING: AC ≥2000V/S ≥0.5MA
4. PLUG(SF-04) RATED POWER: 250V 10/16A
5. PLUG(SF-82) RATED POWER: 250V 10A
6. WIRE: H05VV-F 3*1.0 RATED VOLTAGE: 300/500V
7. COLOR: BLACK

WIRE MARKING: + 0 + 0 + 0 KEMAKEUR YFC BON-EAGLE

Conductor 導體 Insulation 絕緣體 Jacket 被覆體 Overall diameter 完成外徑

mm ²	Resistance maximum 最大電阻(≤)	Min.Thick 最小厚度	Diameter 絕緣外徑	Length of Lay 芯絞	Min.Thick 最小厚度	AVG.Thick 平均厚度	Overall diameter 完成外徑
1.0		0.44	2.5±0.1	130 ↓	0.58	0.8	7.0±0.1
(32/0.130)	at20°C, 19.5ohms/km						

(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)

PAGE

1/1

2Diet GmbH

重點尺寸



Unless specified on the drawing, tolerances are per the follows:

±1
±0.5
±0.1



DESCRIPTION	H05VV-F 3*1.0 SF-04+SF-82
CUSTOMER NAME	2Diet GmbH
CUSTOMER PART NO.	CP095
SCALE	CHECK
UNIT	MM
PATH NAME	I/D 業務