



Dimensions mm[inch]

tolerances acc. to DIN ISO 2768-m
Toleranzen gem. DIN ISO 2768-m

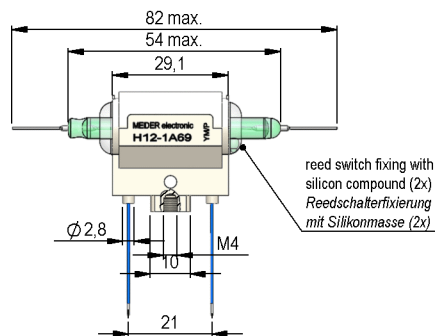


Cable

Cu-Sn wire 0,6 mm,
silicon tube blue
Cu-Sn Draht 0,6 mm
Silikonschlauch blau




Layout

Top view
Draufsicht




Isometric

Scale 1:2
Maßstab 1:2



Marking

according to EN60062/factory code
gem. EN60062/Fertigungsstätte



Coil Data at 20 °C	Conditions	Min	Typ	Max	Unit
Coil resistance		207	230	253	Ohm
Coil voltage			12		VDC
Rated power			620		mW
Coil current			52		mA
Thermal resistance	max. Relay temperature = operating temperature + self heating		32		K/W
Inductance			240		mH
Pull-In voltage				8,4	VDC
Drop-Out voltage		1			VDC

Contact data 69	Conditions	Min	Typ	Max	Unit
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			50	W
Switching voltage	DC or Peak AC			10.000	V
Switching current	DC or Peak AC			3	A
Carry current	DC or Peak AC			5	A
Contact resistance static	Measured with 40% overdrive Start Value			150	mOhm
Insulation resistance	RH <45 %, 100 V test voltage	10			TOhm
Breakdown voltage	according to IEC 255-5	15.000			VDC
Operate time incl. bounce	measured with 40% overdrive			3	ms
Release time	measured with no coil excitation			1,5	ms
Capacitance	@ 10 kHz across open switch		0,2		pF

Special Product Data	Conditions	Min	Typ	Max	Unit
Number of contacts			1		
Contact - form			A - NO		
Dielectric Strength Coil/Contact	according to IEC 255-5	15			kV DC
Insulation resistance Coil/Contact	RH <45%, 100 VDC test voltage	10			TOhm
Capacity Coil/Contact	@ 10 kHz		1,2		pF
Case colour			nature		
Housing material			Crastin,SK 645FR, rated 94V-0, 140 °C, E.I. Dupont		
Connection pins			FeNi-alloy tin plated		
Magnetic Shield			no		
Reach / RoHS conformity			yes		

Modifications in the sense of technical progress are reserved

Designed at: 29.05.08 Designed by: WKOVACS
Last Change at: 18.04.11 Last Change by: WKOVACS

Approval at: 18.06.08 Approval by: KOLBRICH
Approval at: 18.04.11 Approval by: CRUF

Version: 07



Products for tomorrow...

Europe: +49 / 7731 8399 0

| Email: info@meder.com

USA: +1 / 508 295 0771

| Email: salesusa@meder.com

Asia: +852 / 2955 1682

| Email: salesasia@meder.com

Item No.:

1912169114

Item:

H12-1A69

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms			50	g
Vibration	from 10 - 2000 Hz			20	g
Operating temperature		-20		70	°C
Storage temperature		-20		90	°C
Soldering temperature	wave soldering max. 5 sec.			260	°C
Washability		fully sealed			

General data	Conditions	Min	Typ	Max	Unit
Total weight			28		g
Packaging		carton box 10 pcs./each			

Modifications in the sense of technical progress are reserved

Designed at: 29.05.08 Designed by: WKOVACS

Approval at: 18.06.08 Approval by: KOLBRICH

Last Change at: 18.04.11 Last Change by: WKOVACS

Approval at: 18.04.11 Approval by: CRUF

Version: 07