




PANEL THICKNESS	X dimension
0.75-1.25 [0.030-.049]	19.2-.01 [7.56]
1.25-2.0 [0.049-.079]	19.4-.01 [7.64]
2.0-3.0 [0.079-.118]	19.8-.01 [7.80]

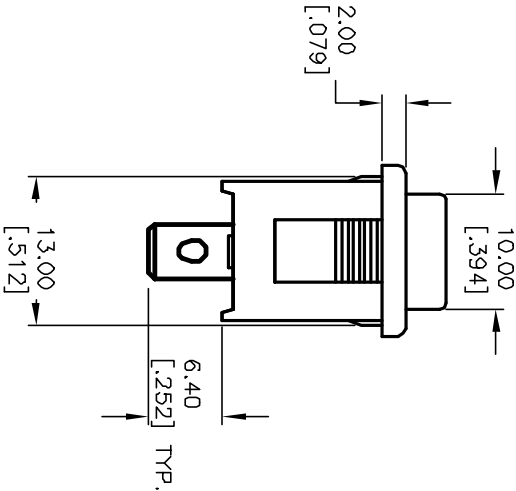


PANEL CUTOUT
NOT TO SCALE

PDS. 1

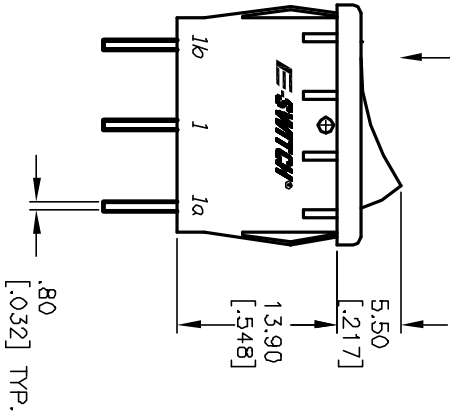

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	OFF	DN
1-1a	OPEN	1-1b



CIRCUIT: SPDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NOS. FOR REF ONLY.
4. RATING: 15A @ 125VAC OR
6A @ 250VAC
5. MATERIALS: TERMINALS: Silver Plated Copper Alloy
CONTACTS: Coin Silver, Silver Plated
6. ELECTRIC LIFE: 10,000 cycles
7. CONTACT RESISTANCE: <20 Mega Ω
8. INSULATION RESISTANCE: >1000 Mega Ω
9. DIELECTRIC STRENGTH: >1500 V 1 minute
>3000 V between poles

E-SWITCH®

A	11463	RELEASED FOR PRODUCTION	3/5/03	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

TITLE				
R1966D BLK BLK EF				
SCALE	DATE	DR	DWG	REV
1.5:1	--	--	M303200	A