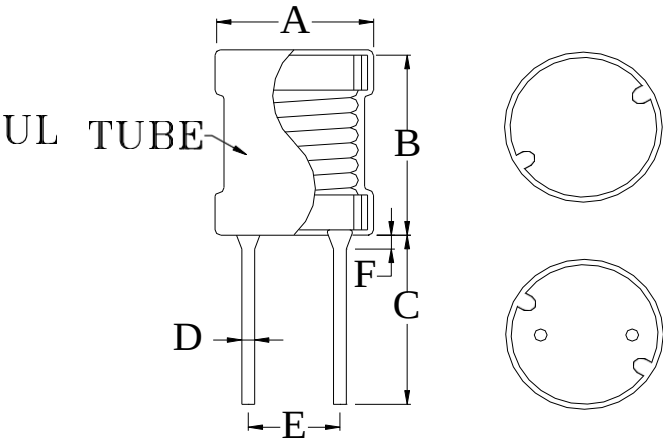


SPECIFICATION FOR APPROVAL

COMMODITY	PK CHOKE		SPEC NO.	SP-060824004
ITEM	COIL0406-0.0033	Green	A	TRR-002

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	5.5	MAX.
	B	7.5	MAX.
	C	16.0	±3.0
	D	0.5	±0.1
	E	2.0	±0.5
	F	3.0	MAX.
	G		
	H		
	I		
	J		

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	3.3± 10%	μH	☒ AGILENT 4294A Precision Impedance Analyzer.
TEST FREQUENCY	100	kHz	☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter.
TEST VOLT	0.1	V	☒ ZENTECH 3302 Automatic Components Analyzer.
RDC	70.66 (max)	mΩ	☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer.
Isat	2.6 (max)	A	☒ ZENTECH 1320 BIAS CURRENT.
Irms	2.4 (max)	A	☒ ZENTECH 502AC Resistance Meter.
			☐ ADEX AX-1155B DC Low Ohm Meter.

REMARK :
1. Inductance drop = 10% typ at Isat.
2. ΔT = 40°C rise typ at Irms.

SPECIFICATION FOR APPROVAL

COMMODITY		PK CHOKE		SPEC NO.	SP-060824004
ITEM		COIL0406-0.0033	Green	A	TRR-002
(3) Material List					
NO	ITEM	MATERIAL	NOTE		
1	CORE	DR2W 4*6 Or other's equivalent			
2	WIRE	UEW Or other's equivalent	130°C CLASS		
3	SOLDER	100H Or other's equivalent			
4	TUBE	Heat Shrinkable tube			