


BN 11

Hexagon socket head cap screws
fully threaded
fully threaded

DIN 912
ISO 4762

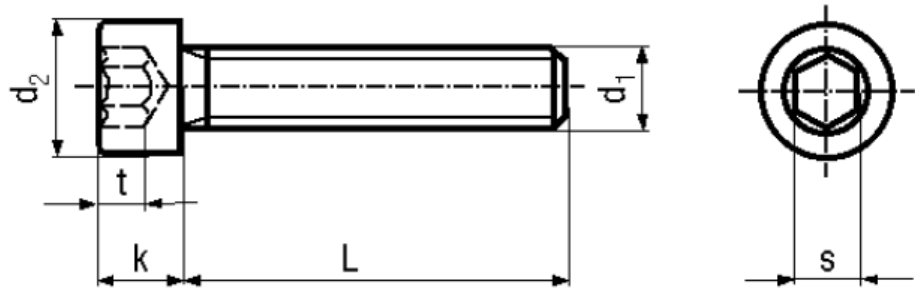

Material	Steel	Tensile strength	1200 N/mm2
Surface	zinc plated blue	Proof stress 0,2%	1080 /mm2
Quality	12.9	Elongation after fracture	min. 8%

Article No. - 1011863	
d ₁	M2,5
L	5
d ₂	4,5
k	2,5
s	2
t min.	1,1

DIN 912: Standard withdrawn

Connecting elements of classes $\geq 10.9/10$ ($\geq HV320$) are at risk from brittle fracture due to metal deposition from aqueous solutions (electroplating).
Depending on the production possibilities, they are therefore supplied from stock with an inorganic zinc coating.