



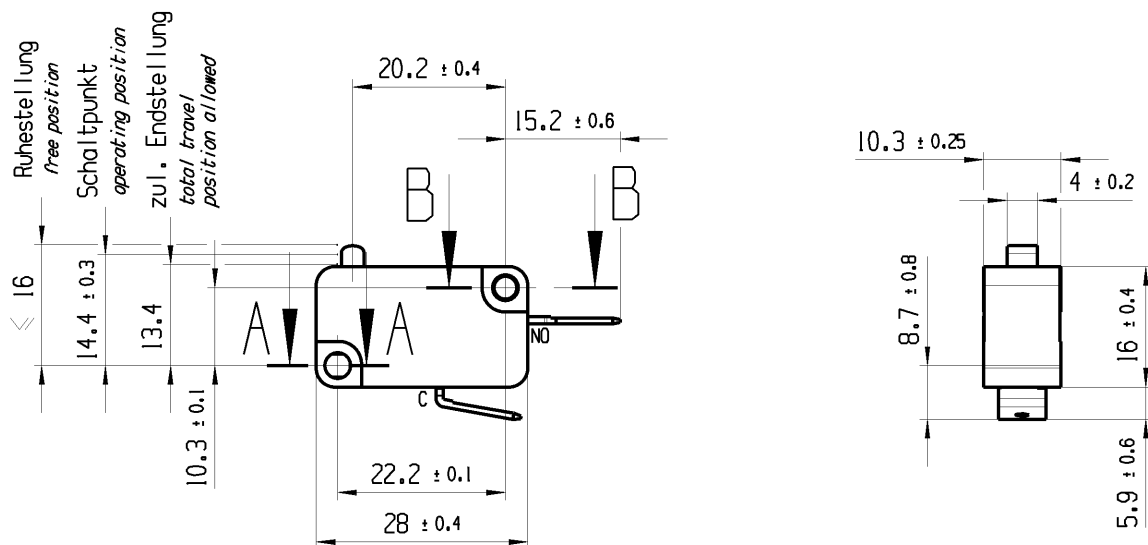

Flachstecker 6,3 x 0,8
EN 61058 / EN 61210 / DIN 46244
blade terminal 6,3 x 0,8
EN 61058 / 61210 / DIN 46244



A-A
2:1

B-B
2:1

Aufschrift
marking



1005

T100


10161 / 250 ~ 50E3 05

10A 125V AC 1/2HP
10A 250V AC 1/2HP



R10



Herstellort / - jahr / - woche
date code of manufacture:
place / year / week




3.35 ± 0.05 x 3.08 ± 0.06

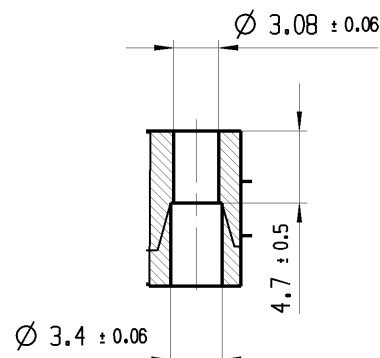

Schliesser 1-polig
SPNO

Schalt-Betaetigungskraft 2.4 bis 3.8 N
actuating force 2.4 up to 3.8 N

Differenzweg ≤ 1.2 mm
movement differential

General tolerances							Sheet 01			Ident.	Document number	Index	
All dimensions are in millimetres		Shape and location ⊙ ≡	Angle ± 2 °	Edge tolerance 		Length	Radii	Format DIN A4	Projection 	Scale 1 : 1	K	10051204	m
					0-6	± 0.1	± 0.2						
					>6-15	± 0.15	± 0.3						
					>15-30	± 0.2	± 0.5						
					>30-70	± 0.3							
					>70-120	± 0.4	± 10%						
>120	± 0.8												
m	109072	2017-08-17		TRIGUIK		System NX V10.0			snap action switch				
l	90078	2014-06-23		BRC									
k	85439	2013-09-16		BRC									
j	28755	1999-11-25		PFU									
Index	ECN-No.	Date (YYYY-MM-DD)		Edited by		Replacement of Zg.l.Nr.v.25.11.1999			 MARQUARDT				