


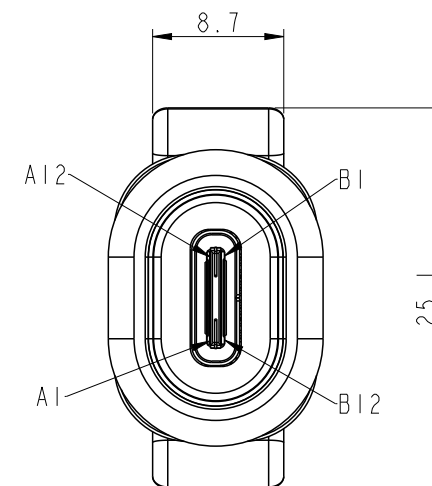



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial release	2020/08/26	Ruru	Old Item No. UC-3IPFFP-QS8001
B	C220027	2022/01/11	Scott	B XI.
C	C220621	2022/04/20	Scott	C XI.

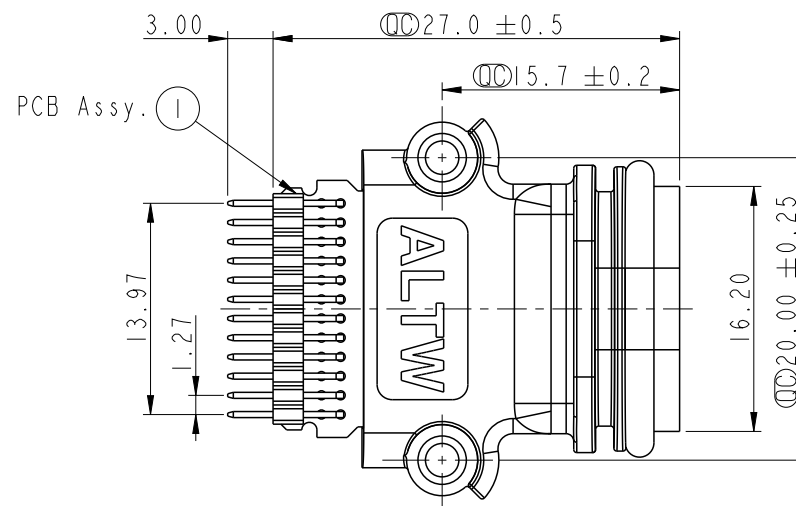


比例 1:1

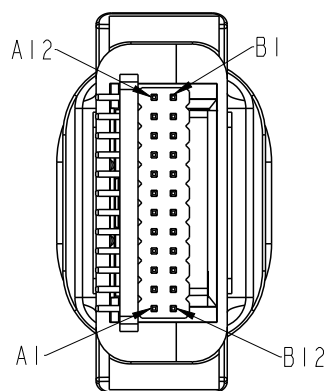

Detail A(2:1)



Measure 量測位置:
End of this PIN center.
端子尾端中心點

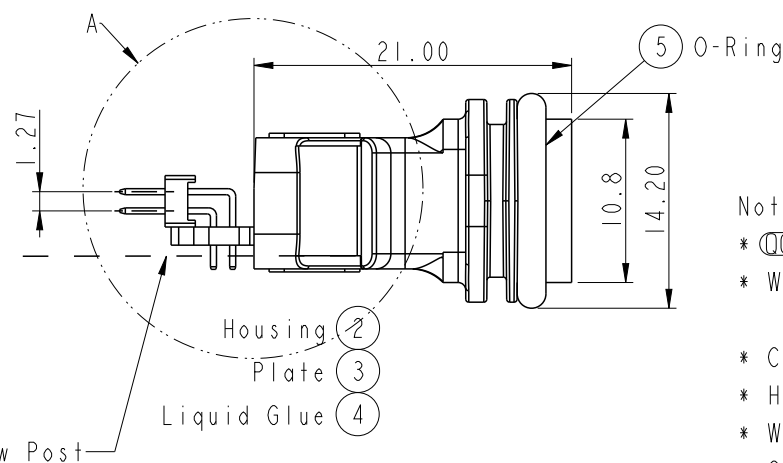


Note:

- * $\varnothing$ Important Dimension
- * Waterproof Rate: IP68(Unmated)
(Under water 1M, 24H)
- * Connector: USB Type C Female
- * Housing: Thermoplastic, UL94 V-0,FI, Black
- * Wafer: 24Pin Header, Dual Row, Pitch=1.27mm
- * O-Ring: Rubber, Gray
- * Panel Thickness max: 4.0mm
- * All Parts Are RoHS Compliant

UNIT: mm			TITLE USB, C TYPE, FRONT FASTENED F, F, PCB S, QUICK			Amphenol LTW 安費諾亮泰企業股份有限公司			ITEM NO UC-00PFFP-QS8001		DRAWN BY Ruru		DATE 2020-08-26		
TOLERANCE			SCALE 2:1	SIZE A4	SHEET 1 OF 2					DWG NO UC-00PFFP-QS8001		CHECKED BY Rita		DATE 2020-08-26	
.XL ±0.25			REV. C	WC-REV. A.28	QC: Inspection item	CUSTOMER ALTW				APPROVED BY Max		DATE 2020-08-26			
.XX ±0.1															
.XXX ±0.05															
ANGLES ±1°															


Recommended Panel Cut-Out

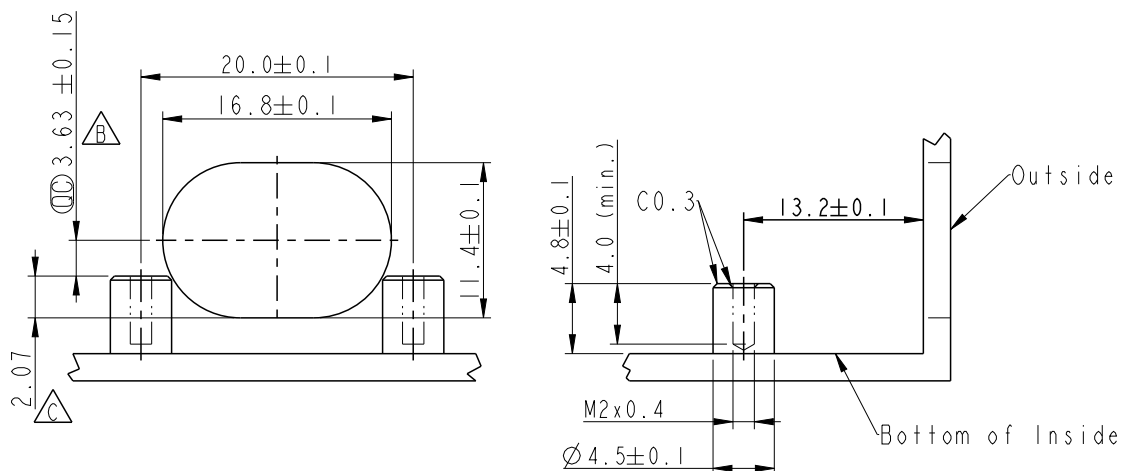


Packing Instructions.




x35pcs in one tray



20 Trays in one Box.
(700pcs connector in one Box)

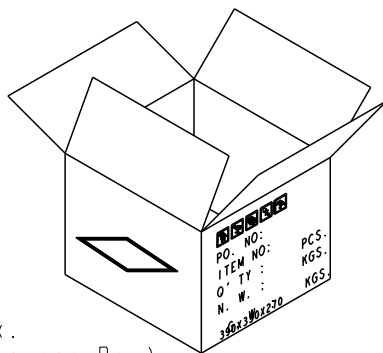


Installation.

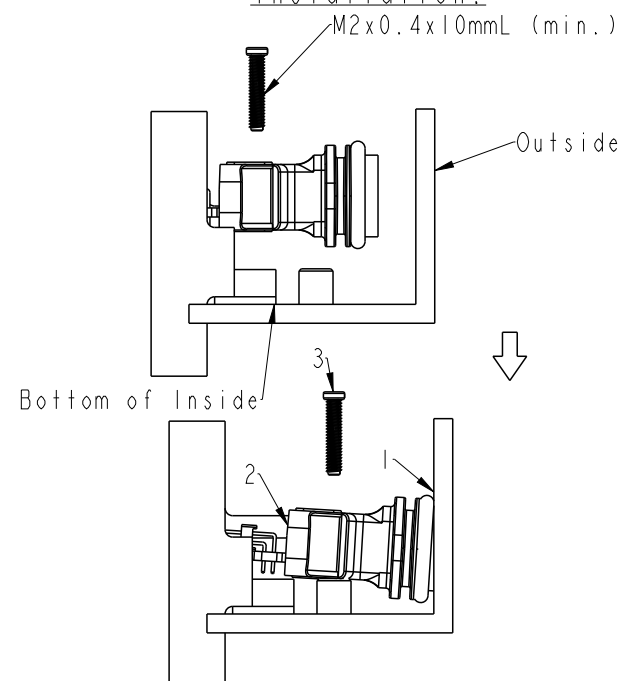


Step 1. Insert the connector into panel-cut by slanted angle.
Step 2. The connector incline downward and engage to screw post.
Step 3. Fastening the screws to fix the connector.

第一步：連接器以傾斜角度插入內孔
第二步：將連接器斜往下壓，與螺絲軸孔卡合
第三步：鎖上螺絲固定



Finished 完成

UNIT:mm



TITLE
USB, C TYPE, FRONT FASTENED
F, F, PCB S, QUICK

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

SCALE 2:1

SIZE A4

SHEET 2 OF 2

REV. C

WC-REV. A.28

QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO
UC-00PFFP-QS8001
DWG NO
UC-00PFFP-QS8001
CUSTOMER
ALTW

DRAWN BY
Ruru
CHECKED BY
Rita
APPROVED BY
Max

DATE
2020-08-26
DATE
2020-08-26
DATE
2020-08-26