


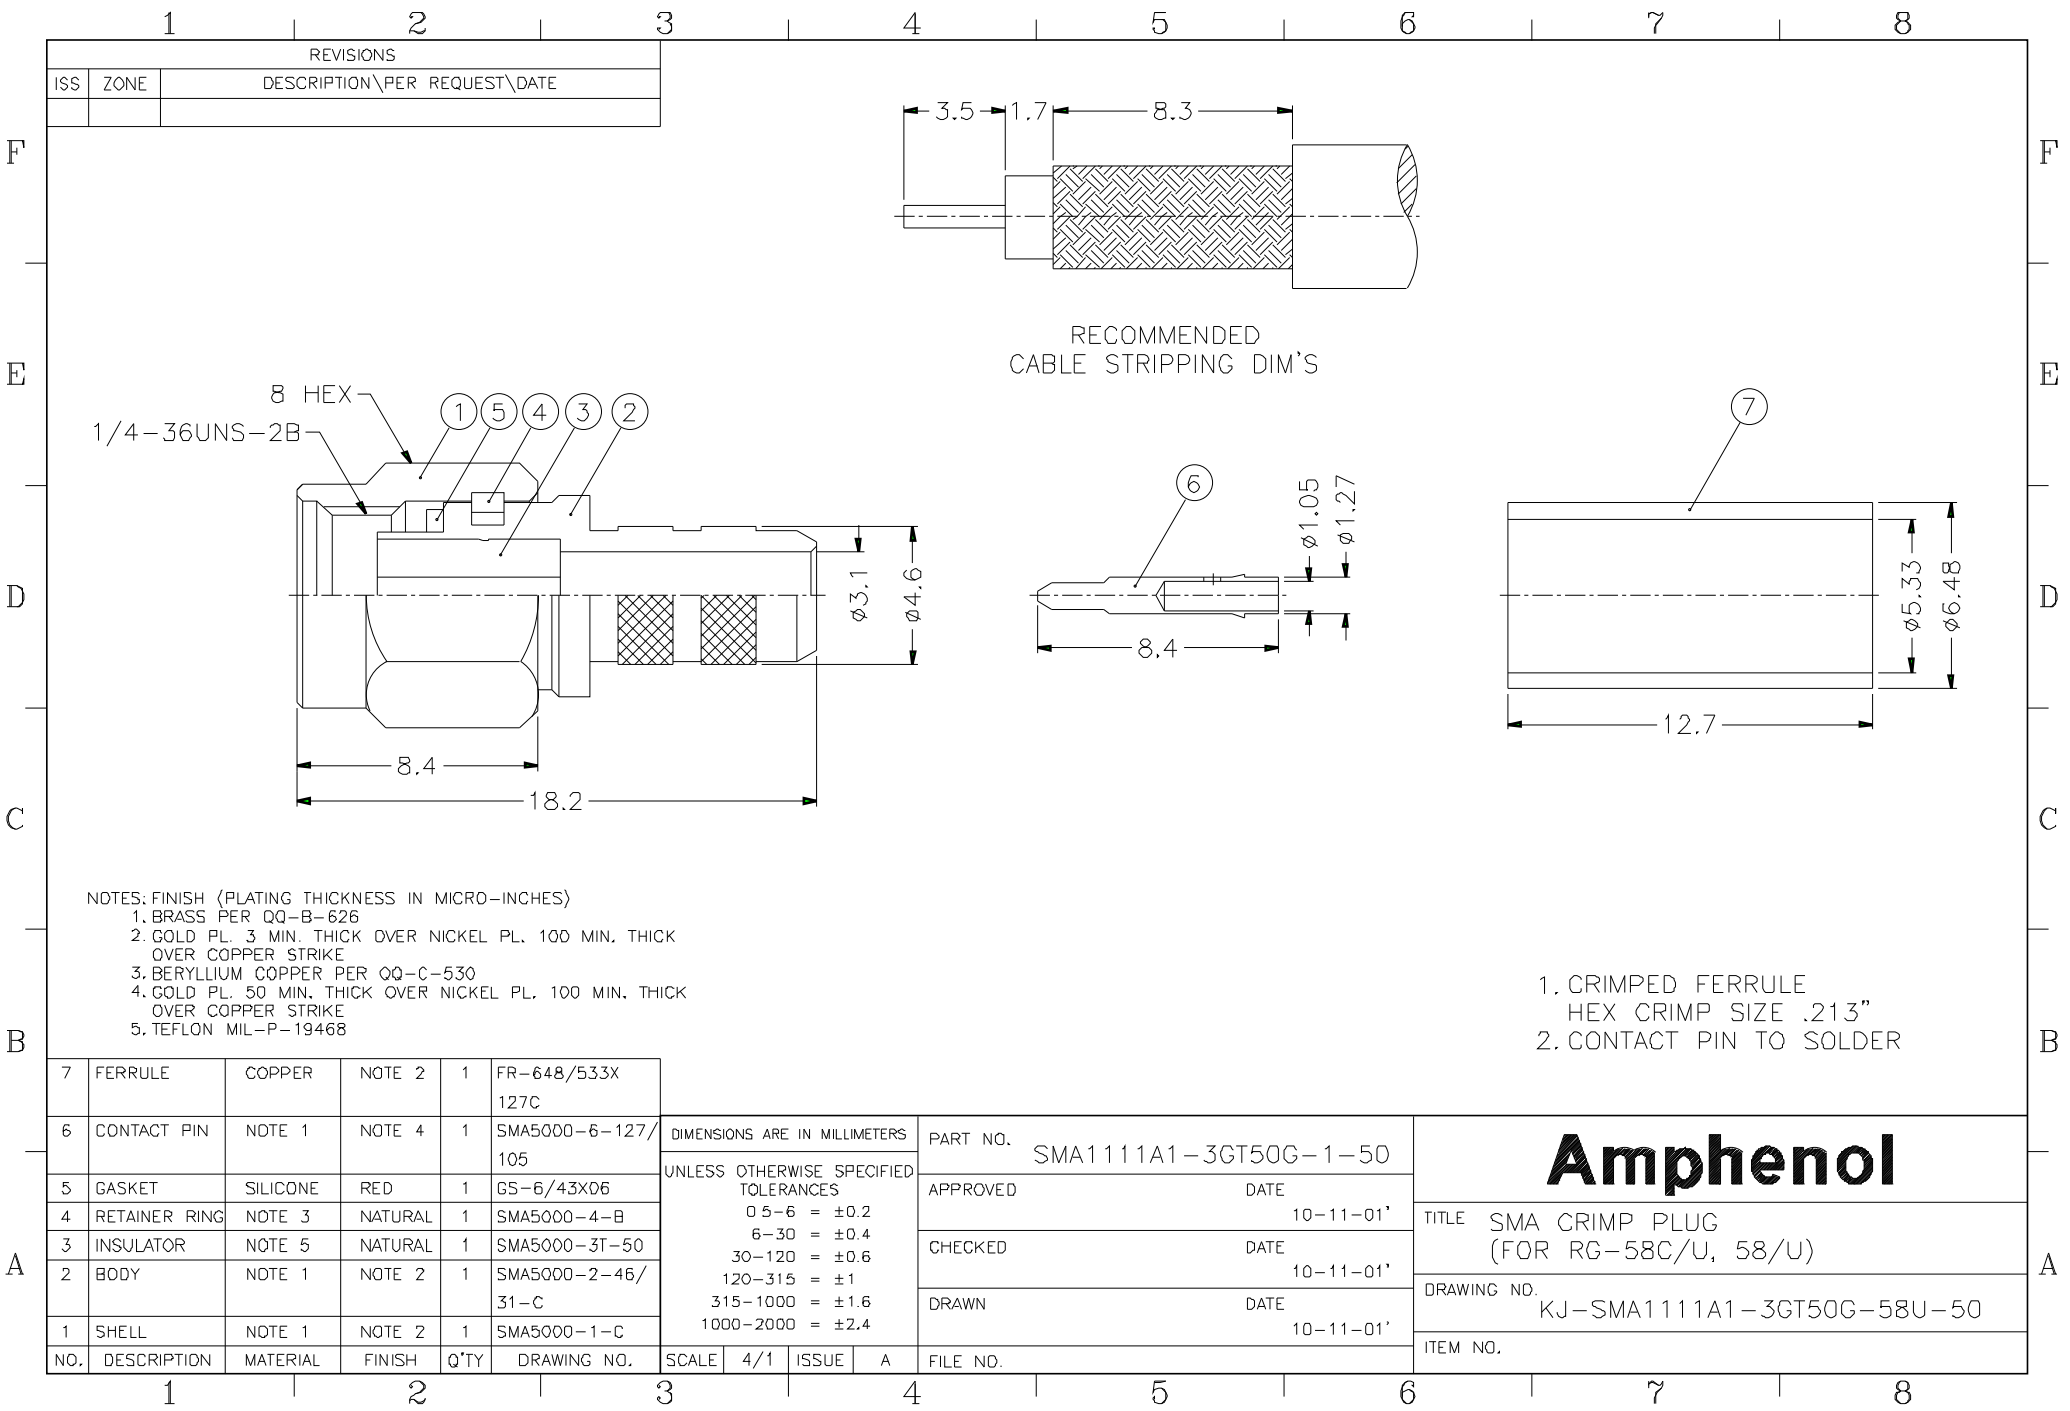

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. BERYLLIUM COPPER PER QQ-C-530
4. GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER

7	FERRULE	COPPER	NOTE 2	1	FR-648/533X 127C	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				PART NO.	SMA1111A1-3GT50G-1-50		Amphenol	
6	CONTACT PIN	NOTE 1	NOTE 4	1	SMA5000-6-127/ 105					APPROVED				
5	GASKET	SILICONE	RED	1	GS-6/43X06					CHECKED	DATE			
4	RETAINER RING	NOTE 3	NATURAL	1	SMA5000-4-B									
3	INSULATOR	NOTE 5	NATURAL	1	SMA5000-3T-50									
2	BODY	NOTE 1	NOTE 2	1	SMA5000-2-46/ 31-C	DRAWN		DATE	TITLE SMA CRIMP PLUG (FOR RG-58C/U, 58/U)					
1	SHELL	NOTE 1	NOTE 2	1	SMA5000-1-C	DATE		10-11-01'						
NO. DESCRIPTION MATERIAL FINISH Q'TY DRAWING NO.						SCALE	4/1	ISSUE	A	FILE NO.	DRAWING NO. KJ-SMA1111A1-3GT50G-58U-50			
											ITEM NO.			

Amphenol

SMA CRIMP PLUG
(FOR RG-58C/U, 58/U)

KJ-SMA1111A1-3GT50G-58U-50