THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	N	REVISED PER ECO–11–020101	10APR2012	CJV	CWR

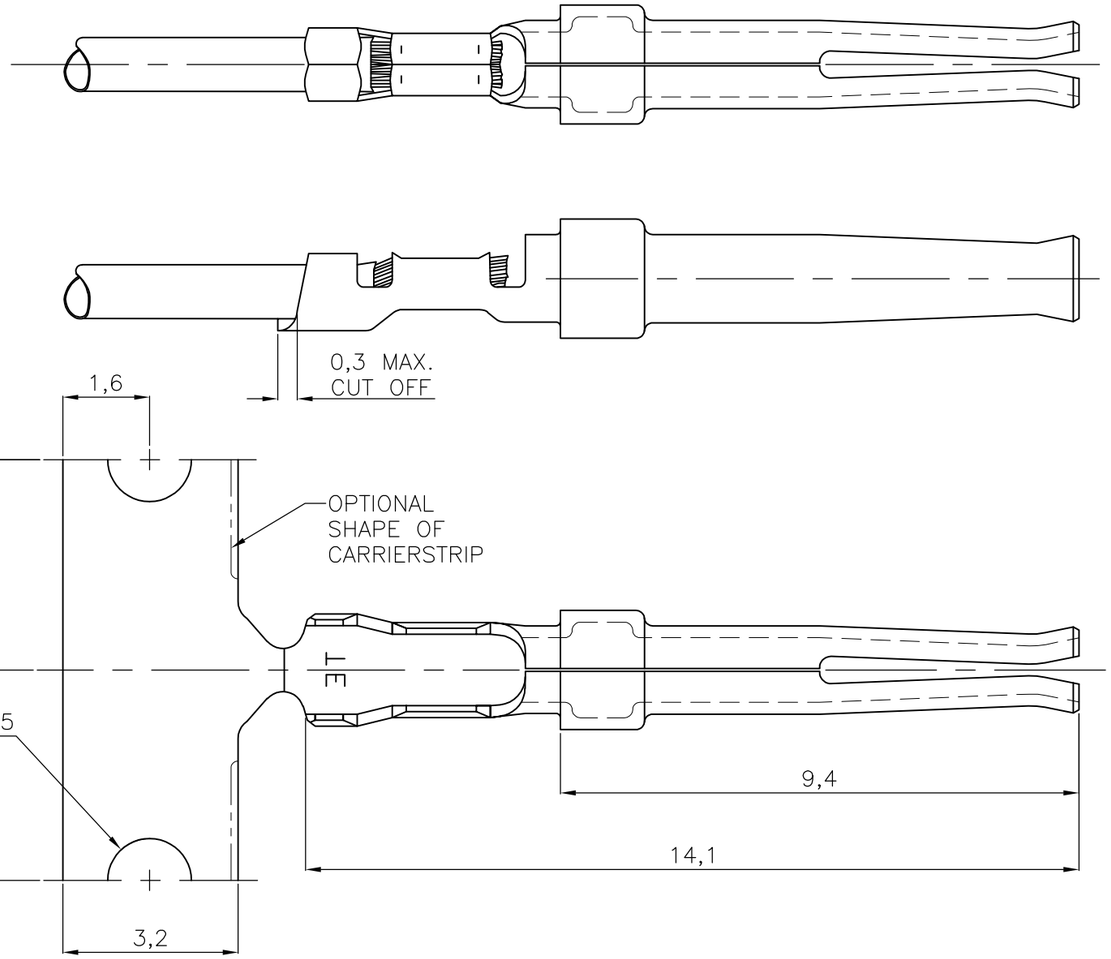

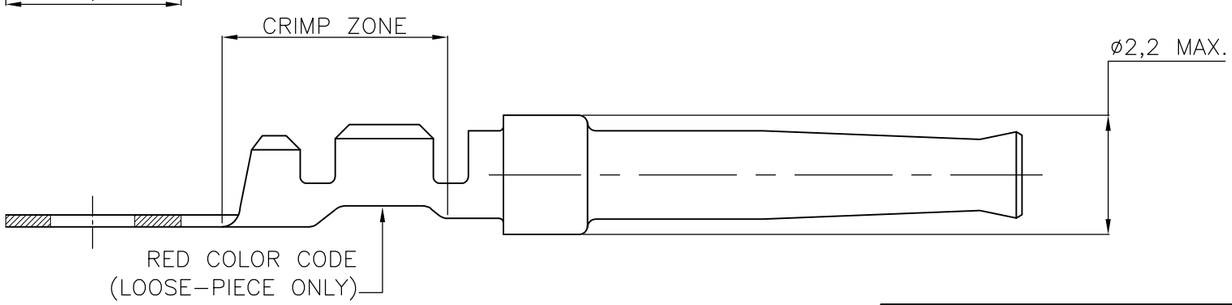

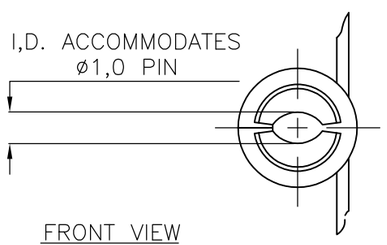

FRONT VIEW

NOTES:

1. FOR MINI–APPLICATOR–12500 PCS REEL.
2. FOR REEL–FEED HAND TOOLING–500 PCS REEL.
3. FOR HAND TOOLING– LOOSE PIECE.
4. MATERIAL: PHOSPHORBRONZE.
5. FINISH:
   - Ni UNDERPLATING ALL OVER.
   - CONTACT AREA PLATING MEETS IEC–807–3 PERFORMANCE LEVEL 2.
   - CRIMP ZONE Sn PLATED.

WIRE RANGE: 24–20 AWG(0,56–0,20mm²)
INSUL. RANGE: 1,27–1,52 DIA

5	166291–1	5–166051–1	166051–1
FINISH	LOOSE–PIECE 3	PART NUMBER 2	PART NUMBER 1

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONING AND TOLERANCING PER ASME Y14.5M–2009

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± 0,127
2 PLC	± –
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL: –
FINISH: –

DWN	–	
CHK	K.MALCZYK	21AUG08
APVD	T.DE BOER	21AUG08
PRODUCT SPEC	108–40005	
APPLICATION SPEC	114–10000	
WEIGHT	–	

TE Connectivity

NAME: SOCKET CONTACT, SIZE 20 DF. –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–166051	—

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV N

1470–19 (3/11)

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА