

5

4

3


2

1



Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

No. 1 contact

12,5 max.

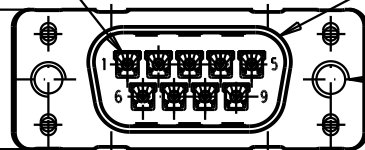

nut thread

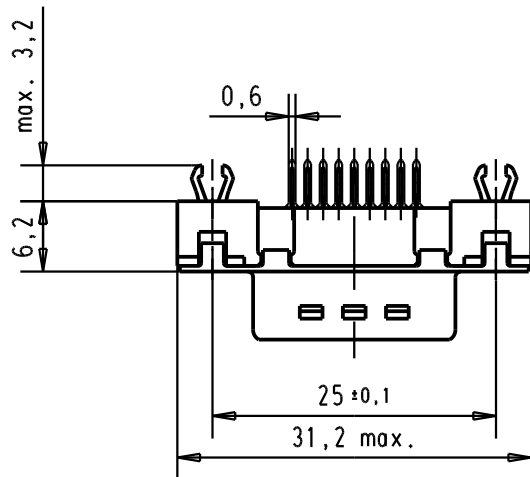

Printed board layout
component side

$$4 \times 2,74 = 10,96$$

$$3 \times 2,74 = 8,22$$

No.1 contact

2,74

2,84

1,42

No.6 contact

No.9 contact

2,74

25

∅3,1 ± 0,1

∅0,1

∅1 ± 0,1

∅0,05

Connector retention and insertion forces on the PCB = 25 / 80 newtons

09 65 161 3711

M3

1

09 65 161 6711

M3

2

09 65 161 7711

M3

3

09 65 161 3712

4-40 UNC

1

31892

22/04/04

JH

09 65 161 6712

4-40 UNC

2

31523

11/07/03

TCP

09 65 161 7712

4-40 UNC

3

29723

05/03/02

CV

Part number

Nut thread


Performance level

Mod.

Dat.

Name

HARTING EURL
F-95972 Paris



All Dim. in mm
Orig. Size DIN A 4



D-Sub, 9 poles,
male, straight,
with solder pins 3.7,
nuts and grounding board lock

TB 09 65 161 x71x

Sub.

Moßstab/
Scale

1,5:1

Blatt/ Page

1