

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	REVISED PER ECO-16-012955	07SEP2016	NK	MZ

D


C

B

A

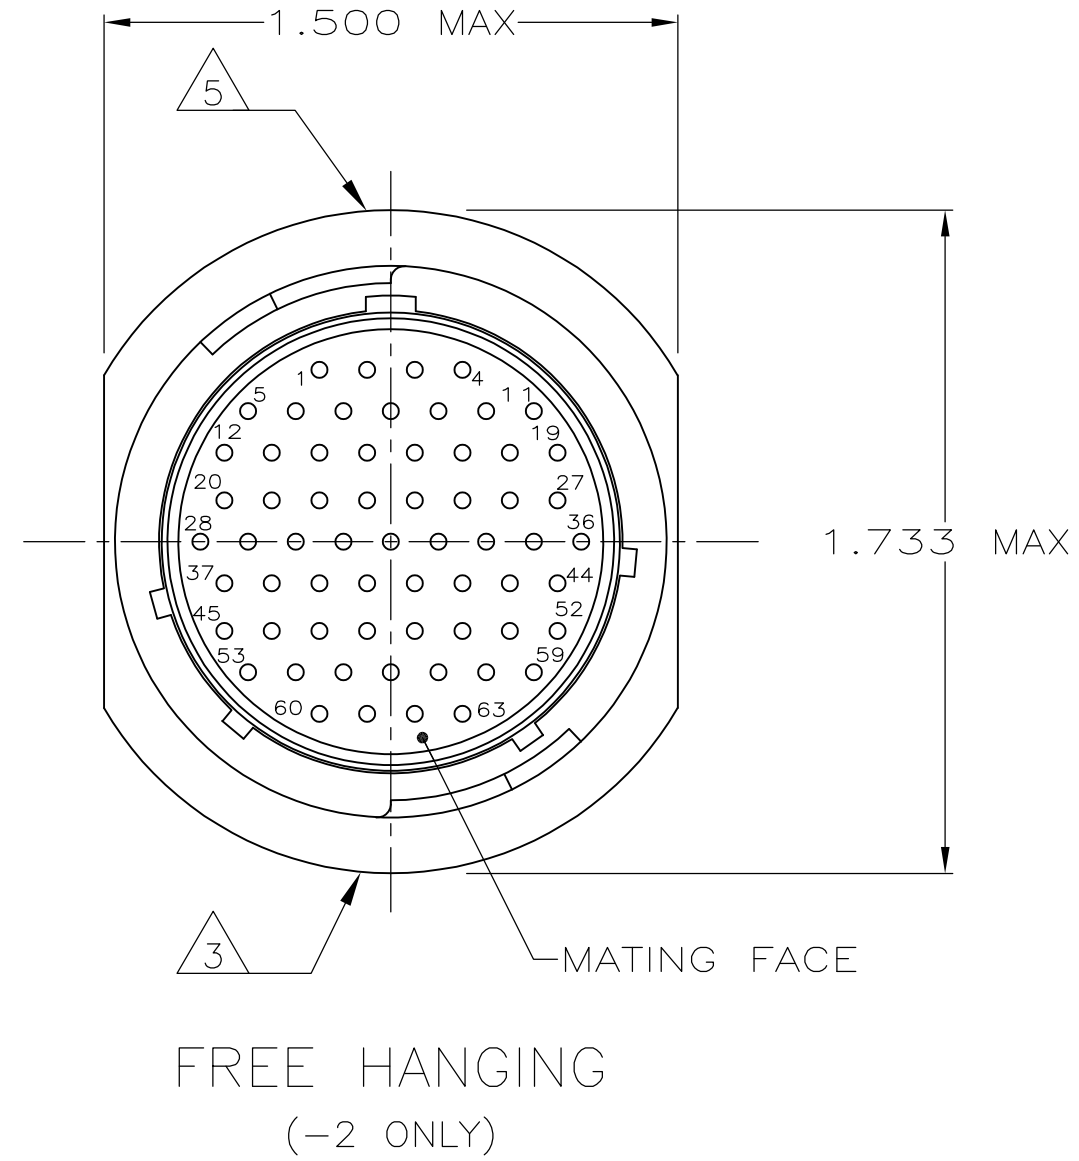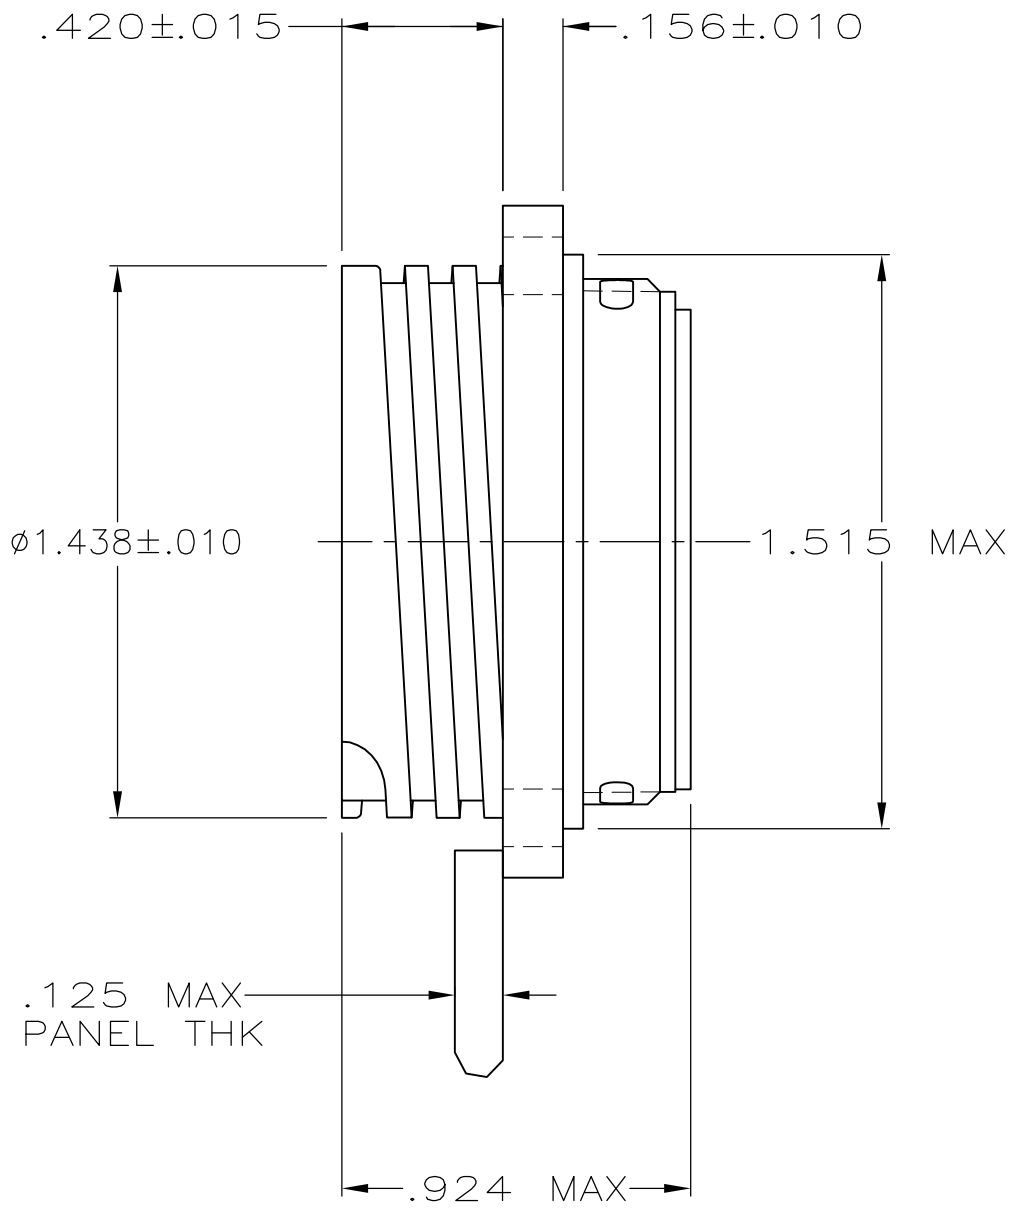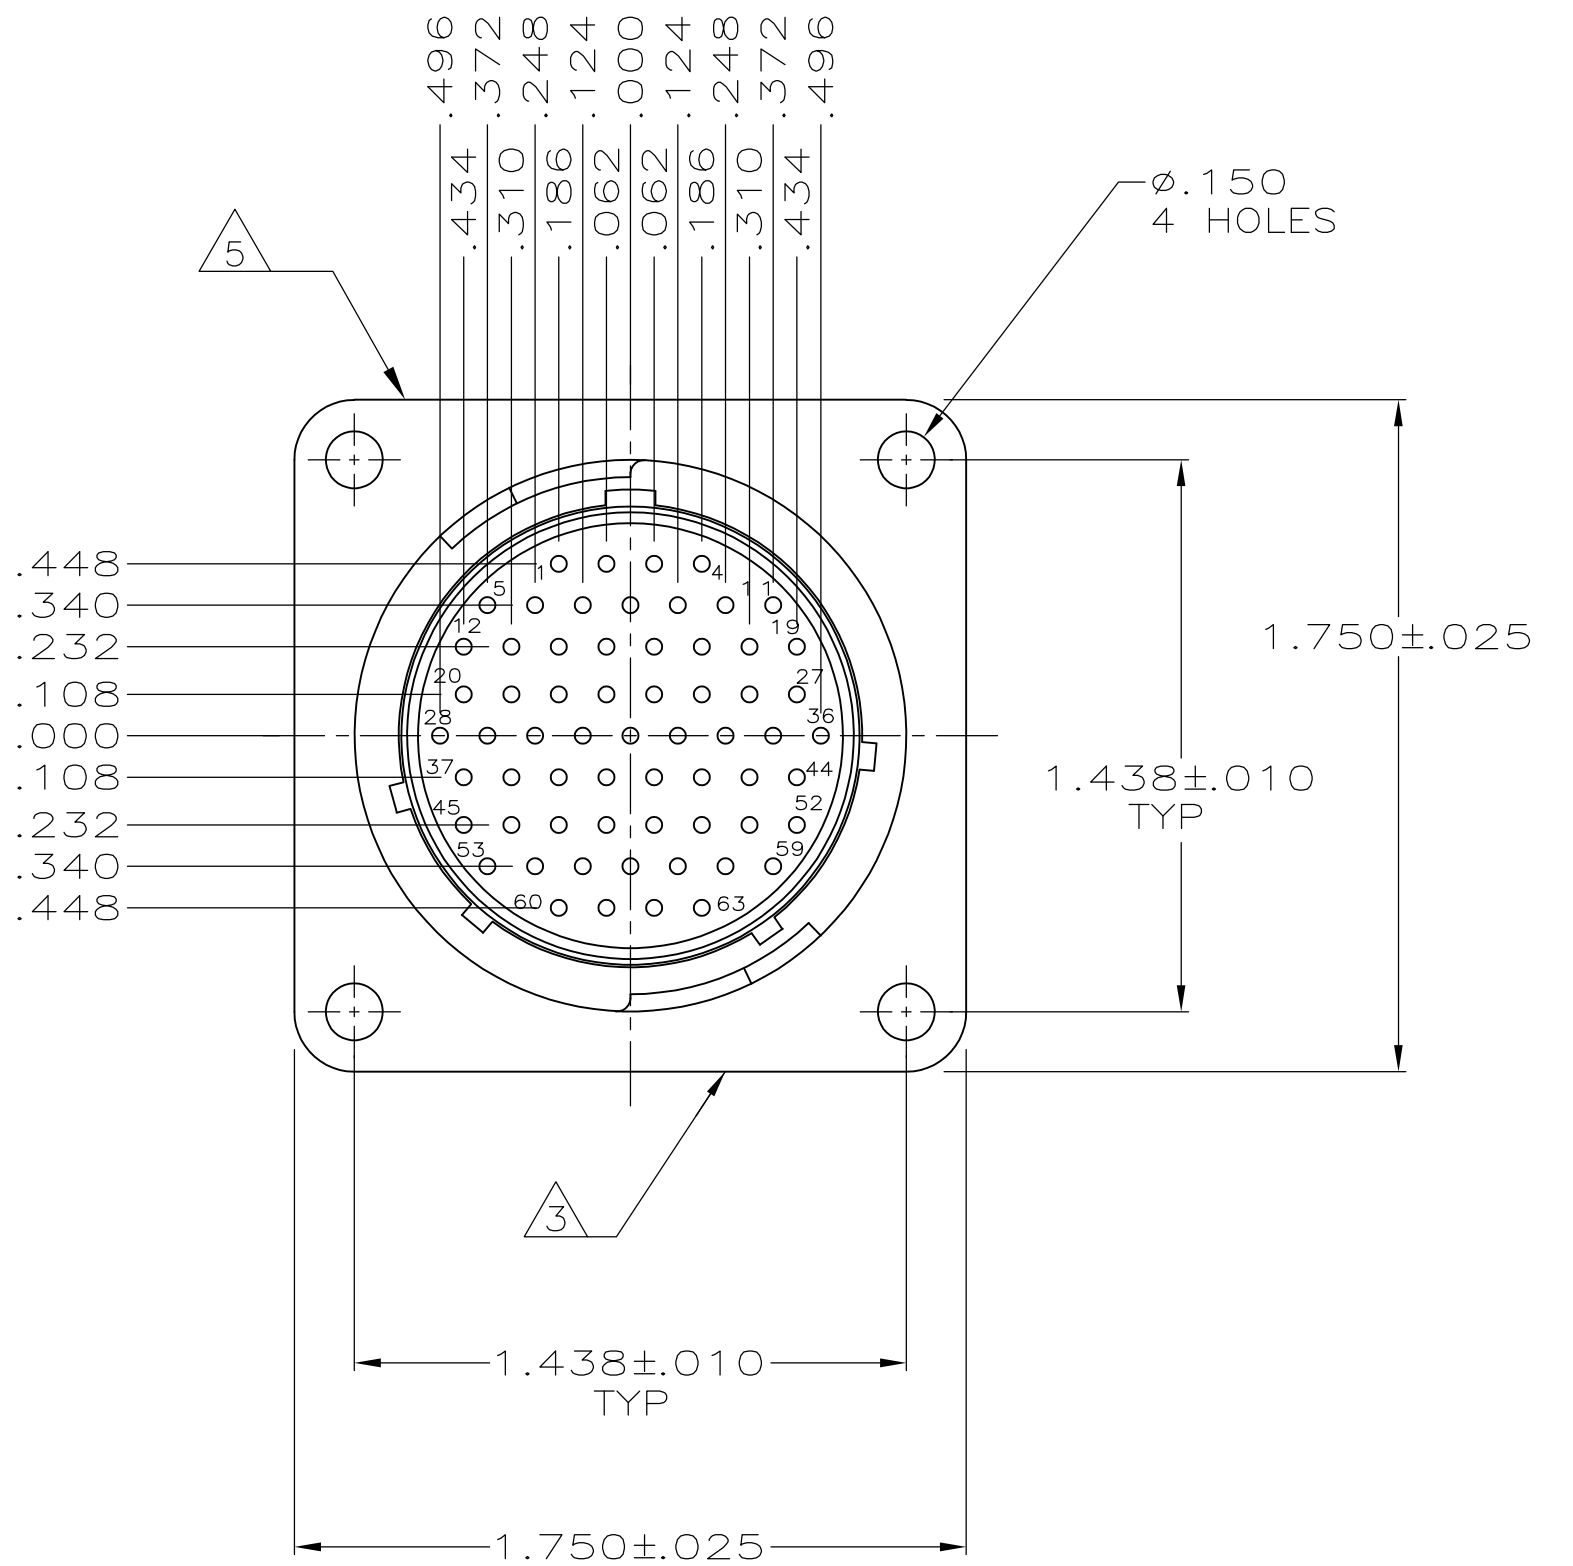

- 1 CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.
- 2 WILL ACCEPT (63) SIZE 20 PIN CONTACTS.
- 3 AMP ON FLANGE EDGE.
- 4 #4 FASTENER RECOMMENDED FOR MOUNTING.
- 5 PART NUMBER ON FLANGE EDGE.

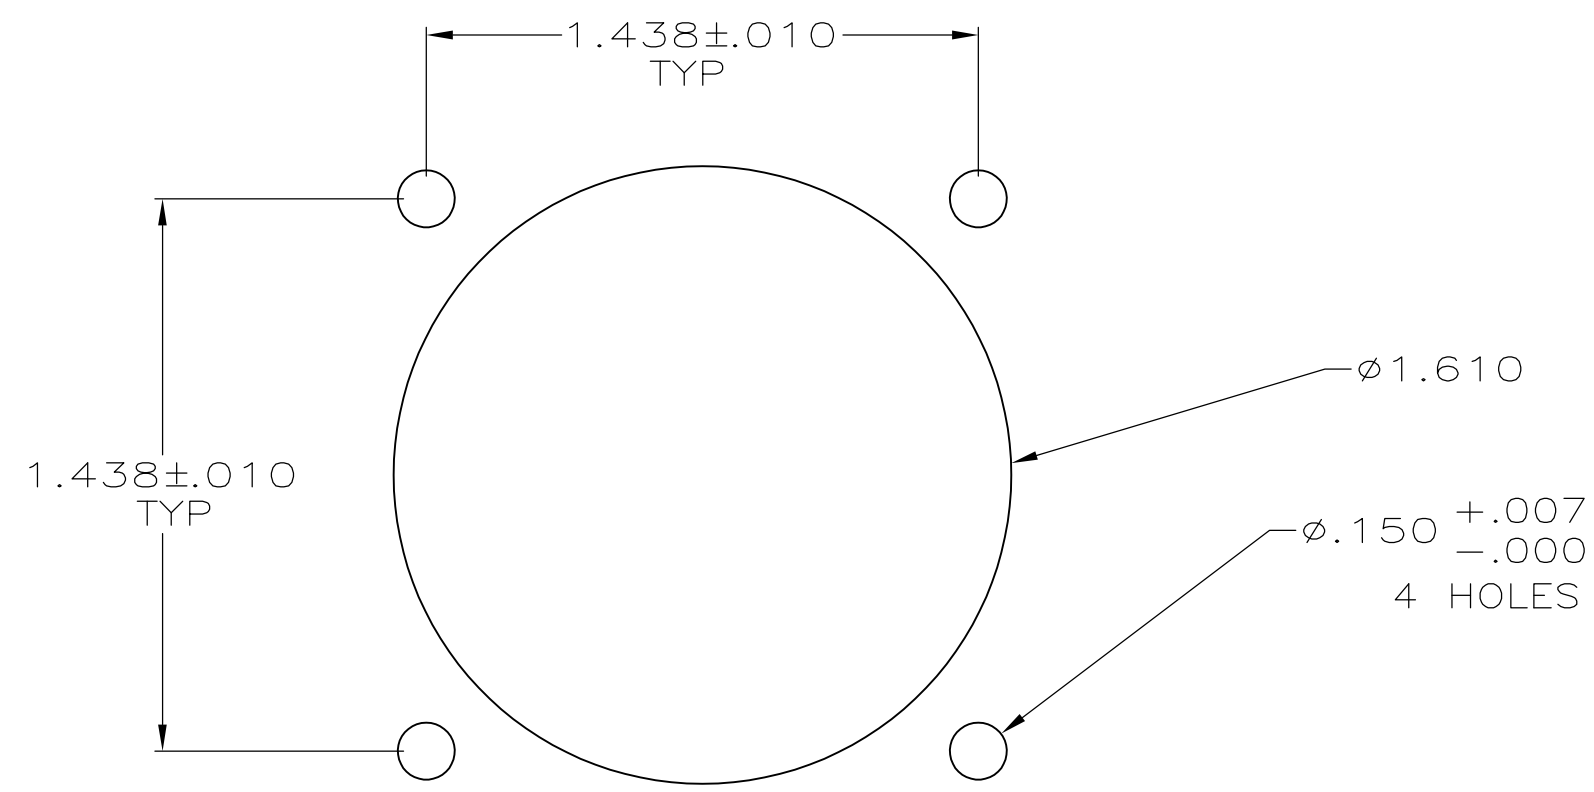

PANEL CUTOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.STAUB BG 4/3/91	TE Connectivity		
DIMENSIONS: INCHES		CHK W.G.LENKER 7-24-92			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K.BEAVER 7-24-92	NAME		
0 PLC ± -		PRODUCT SPEC	RECEPTACLE ASSEMBLY, STD SEX, SERIES 2, 23-63, CPC		
1 PLC ± -		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
2 PLC ± -		WEIGHT	A2 00779 C-205843		
3 PLC ± .005		CUSTOMER DRAWING	SCALE 2:1 SHEET 1 of 1 REV G		
4 PLC ± -					
ANGLES ± -					
FINISH					
MATERIAL THERMOPLASTIC, BLACK					