




RECOMMENDED P.C.B. LAYOUT


PANEL THICKNESS	X dimension
0.75-1.25 [0.030-.049]	19.2-21 [1.756]
1.25-2.0 [0.049-.079]	19.4-21 [1.764]
2.0-3.0 [0.079-.118]	19.8-21 [1.780]

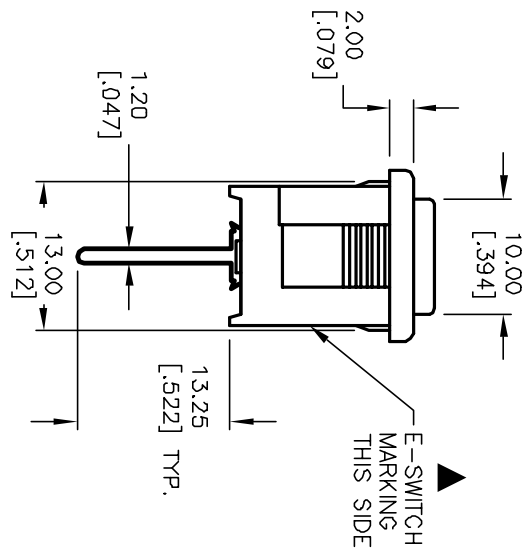

PANEL CUTOUT
NOT TO SCALE

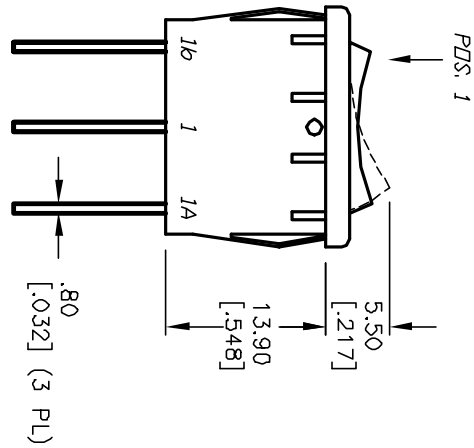

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
<ON>	OFF	<ON>	
1-1a	OPEN	1-1b	



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 15A @ 125VAC OR 6A @ 250VAC
5. MATERIALS: TERMINALS: Silver Plated Copper Alloy
CONTACTS: Coin Silver, Silver Plated
6. ELECTRIC LIFE: 10,000 cycles
7. CONTACT RESISTANCE: <20 Mega-OHM
8. INSULATION RESISTANCE: >1000 Mega-OHM
9. DIELECTRIC STRENGTH: >1500 V 1 minute
>3000 V between poles

E-SWITCH®

REV.		ECN No.	DESCRIPTION	DATE	CHKD	TITLE	SCALE	DATE	DR	DWG	REV
B		12061	REVISED AND REDRAWN	4/16/02	CJB	R19661 BLK BLK EP	1.5:1	4/16/02	CB	M306207	B
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED											