

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications

DIN EN 60 664-1

DIN EN 61 984

Inserts

01. Number of contacts :16+PE

02. Rated Current :16A

03. Rated Voltage :250V

04. Pollution degree :3

05. Rated impulse voltage :4kv

06. Insulation resistance : $\geq 10^{10} \Omega$

07. Material:Polycarbonate

08. Colour:RAL 7032 (Light grey)

09. Rated voltage acc. to UL/CSA:600V

10. Limiting temperatures : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

11. Flammability acc. to UL94:V0

12. Mechanical working life

(mating cycles) : ≥ 500

Contacts

01. Material:Copper alloy

02. Surface:hard-silver plated

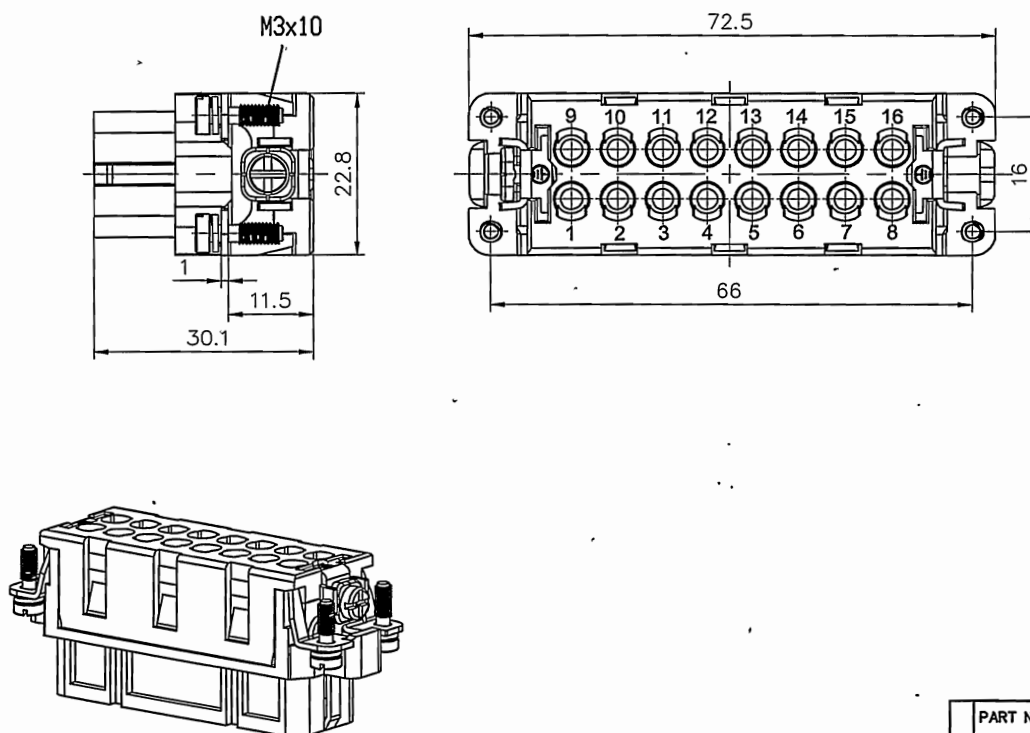
03. Contact resistance : $\leq 1\text{m}\Omega$

04. Terminal :Crimp terminal

05. Wire gauge :0.14-4.0mm² (AWG 26-12)

06. Stripping length :7.5mm

07. Rohs Compliance

Note:Crimp contact pins should
order separately

DETACHED LISTS	PART NO.:	/			
	APPD:	HJS 2016.8.26			
	CHKD:	Jm 2016.8.25			
	DRFT:	yang 2016.07.25			
		THIRD ANGLE PROJECTION		NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
		DRAWING NO.: DA-016-FC-E01		REV	D0-1
		DO NOT SCALE DRAWING		SHEET	1/1
		MM (INCH)		SCALE	1:1