

ELECTRO-MAGNET BUZZER

Customer	
Customer No.	
BeStar Model Name	BMT1205H09
Product No.	010400
Issue No.	BS/TET01.114A
Issue Date	01/03/10

Approval:

1. Characteristic
2. Drawing
3. Reliability Test
4. Packing



BESTAR ELECTRONICS INDUSTRY CO.,LTD
TianAn Industry Park4/F,Site B ChangZhou New District
Tel:86-519-5103228
Fax:86-519-5131010
Http:www.be-star.com
E-Mail:bestarco@pub.cz.jsinfo.net

BMT1205H09




1. Characteristic

★Electrical and Mechanical Characteristics

No.	Item	Specification
1.	Rated Voltage	5 V
2.	Operating Voltage	4...8V
3.	a) Rated Current	max 40mA
4.	Coil Resistance	45± 5ohm
5.	b) Coil Impedance	80ohm
6.	a) Sound Output at10cm	min 85 dB
7.	Resonance Frequency	2400 ± 200Hz
8.	Housing Materal	NORYL
9.	Working Temperature	-40...+85 °C
10.	Storage Temperature	-40...+85 °C
	a) Value applying at rated voltage (2400Hz,1/2duty square wave)	
	b) Value applying at rated voltage (2400Hz,sine wave measuring current 60 μ A)	

★Standard Output Measurement Setup

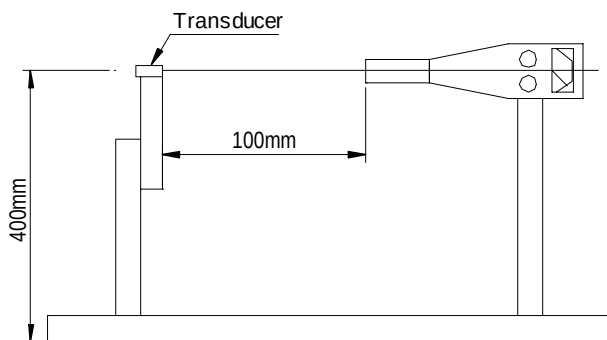

Standard Conditions


Temperature: 17~25°C
 Relative Humidity: 45~85 %(RH)
 Air Pressure: 860~1060hPa

DIS.		DATE		Page:1 of 4	BMT1205H09
CHEC.		DATE		3rd angle projection	Transducer
APPR.		DATE			DRG NO BS/TET01.114A
BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					


BMT1205H09

2. Drawing

Tolerance: ± 0.5

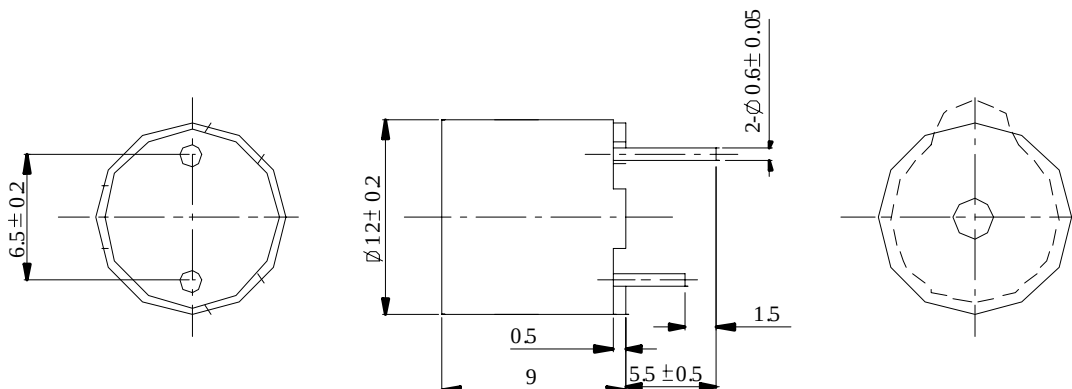

★Frequency Response

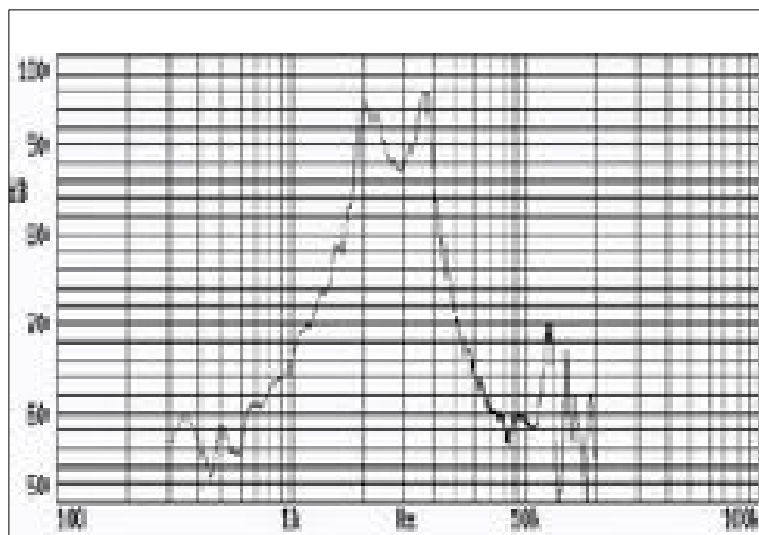

DIS.		DATE		Page:2 of 3	BMT 1205H09
CHEC.		DATE		3rd angle projection	Transducer
APPR.		DATE			DRG NO BS/TET01.114A
BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site BChangZhouNew District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.bestar.com					

BMT1205H09

3. Reliability test

3.1 High temperature test


Temperature +85° C
Duration 96hrs

3.2 Low temperature test

Temperature -40° C
Duration 96hrs


3.3 Temperature cycle test

Cycles 5



3.4 Humidity cycle test

Cycles 10



all these tests above should be measured after leaving normal temperature for 2hrs.

3.5 Load test

Power supply rated voltage
Duration 1000hrs

3.6 Vibration Test

Vibration Frequency 10~55Hz
Amplitude 1.5mm
Duration x,y&z directions 30min

3.7 Drop test

Height 70cm
(to 10mm thickness woodenboard)
Direction 3

3.8 Solderability test

Solderability temperature 255° C
Heat applying time 3sec

Notice: After the test the part shall meet specifications without any degraance and performance except S.P.L, S.P.L shall be 77dB more .

DIS.		DATE		Page:3 of 4
CHEC.		DATE		3rd angle projection
APPR.		DATE		



BESTAR ELECTRONICS INDUSTRY CO.,LTD

TianAn Industry Park 4/F,Site B ChangZhou New District

E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com



BMT1205H09

Transducer

**DRG NO
BS/TET01.114A**

BMT1205H09

4. Packing

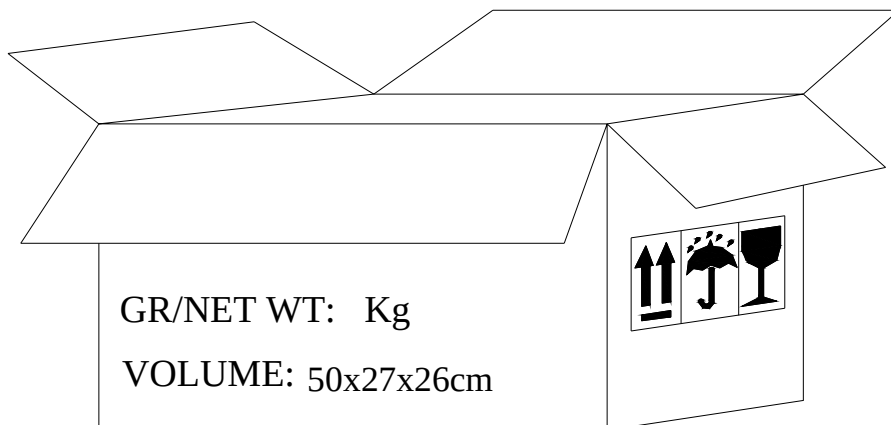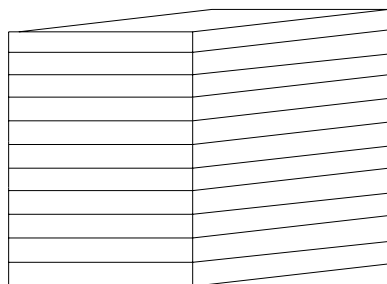

- 1)100pcs/tray
- 2)30tray/carton
- 3)3000 pcs/carton in total
- 4)carton size 50x27x26cm

This print and information there in are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content No.010400

DIS.		DATE		Page:4 of 4	BMT1205H09
CHEC.		DATE		3rd angle projection	
APPR.		DATE			Transducer
 BESTAR ELECTRONICS INDUSTRY CO.,LTD TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					DRG NO BS/TET01.114A