


1. MATERIALS AND FINISHES:
 - BODY - BRASS, NICKEL PLATING
 - CONTACT - BRASS, SILVER PLATING
 - INSULATOR - PTFE, NATURAL
2. ELECTRICAL:
 - A. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
 - A. DURABILITY: 500 CYCLES MIN.
 - B. TEMPERATURE RANGE: -65° C TO +165° C





REVISIONS				
REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	20-Feb-63	7791	
B	SHELL WAS CHANGED	28-Sep-06	46174	SH
AB	SPRING WAS CHANGED	11-Mar-10	47687	SH
AC	SYNC THE DRAWING WITH DANBURY	04-Jul-12	48590	SH



SCALE 3.000

RECOMMENDED CABLE STRIPPING DIMENSIONS

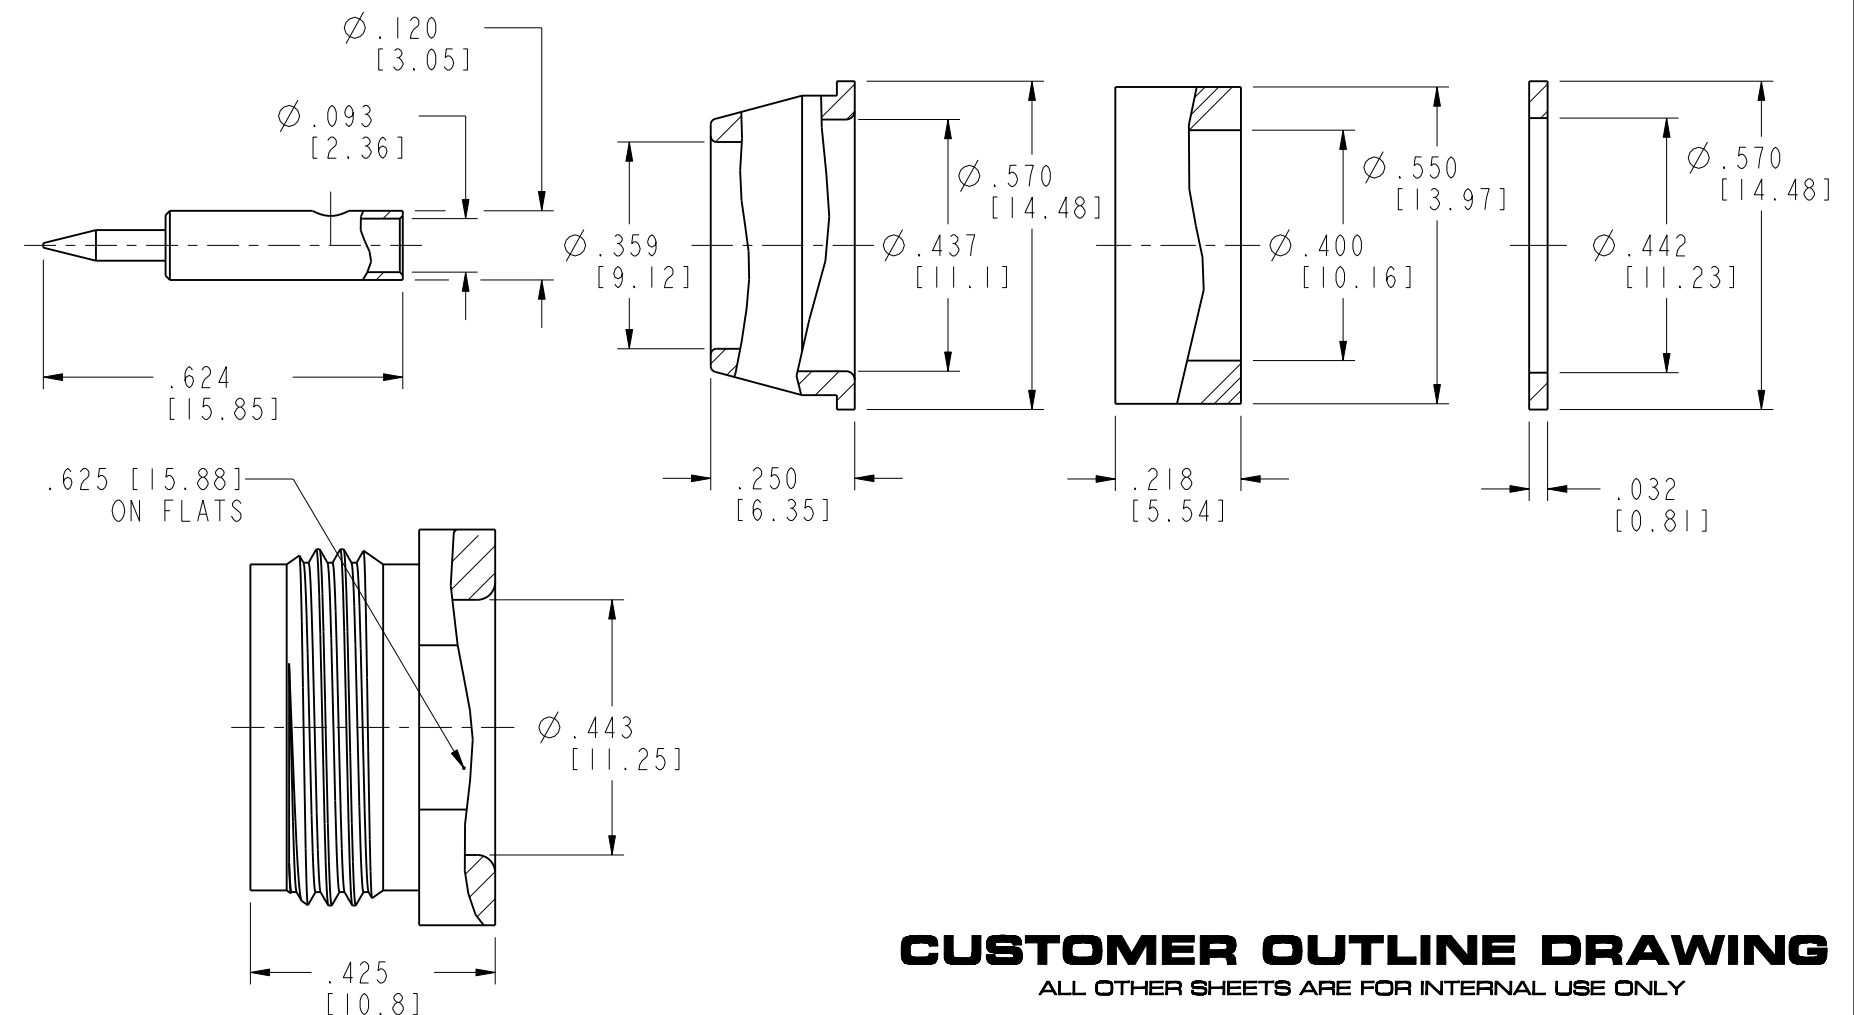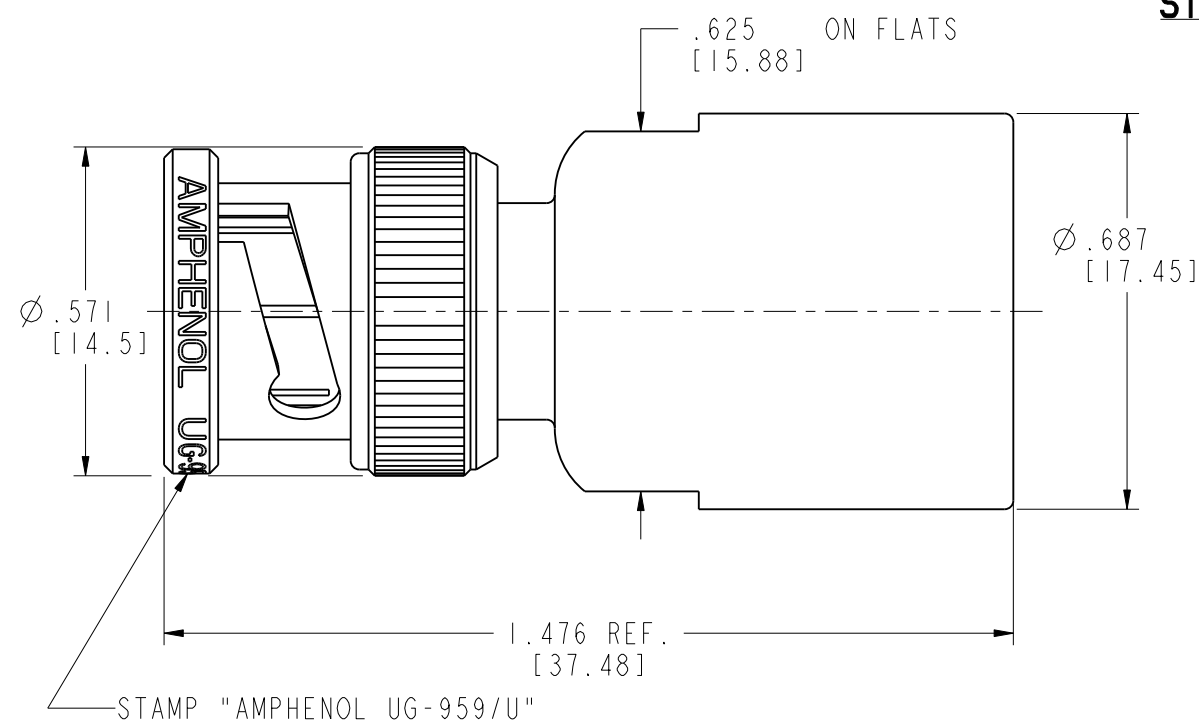

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES $\pm .015$ (0,381 mm) $\pm .005$ (0,127 mm) $\pm 1^\circ$ NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL REFERENCE UG-959/U CONFIGURATION LEVEL: FINISH	DRAWN T.DENG	DATE 03-Jul-12	TITLE BNC PLUG (FOR RG-8/U CABLE)		Amphenol RF www.amphenolrf.com	
		ENGINEER N.SLADEK	DATE 20-Mar-80			DRAWING NO.6775	
		APPROVED S.HSIEH	DATE 04-Jul-12	SCALE: 3.0:1.0	SHEET 2 OF 2	ITEM NO.6775	
		CAD FILE		DWG SIZE B	REV AC	PART NO.6775	