
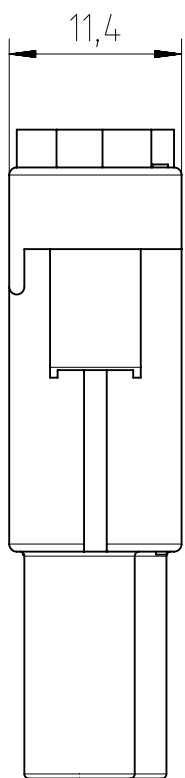
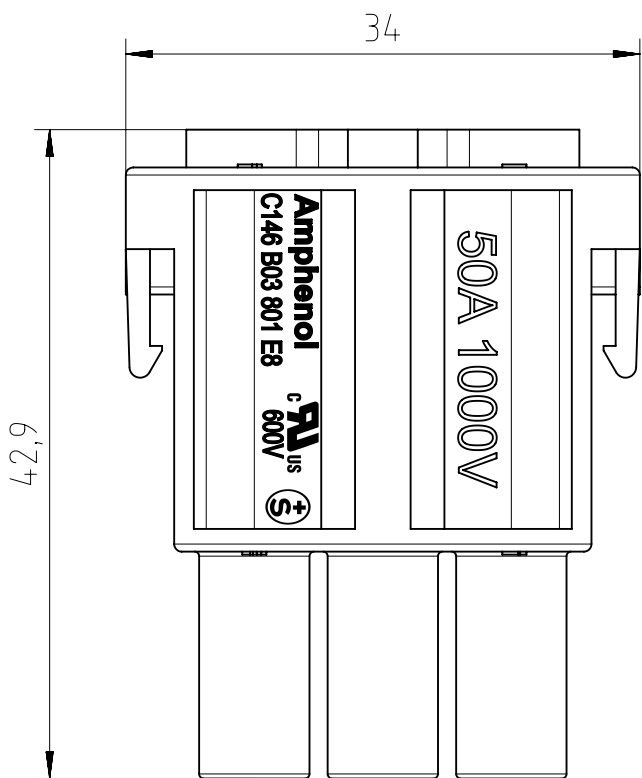
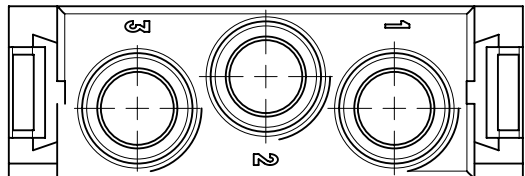


Characteristics

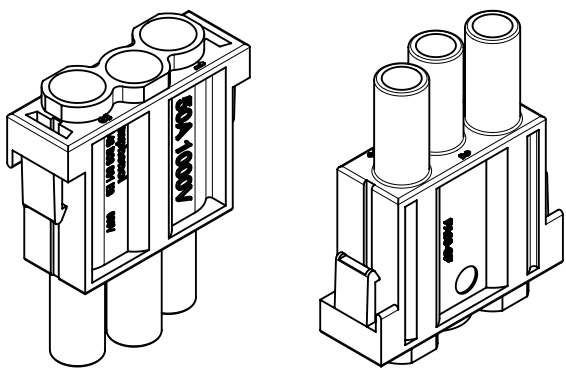

General Characteristics	Standard	Value
number of contacts		3
termination technique		crimp
wire gauge		1,5 mm ² - 10 mm ² AWG 16 - AWG 8
max. insulation diameter		7,2 mm
flammability	UL 94	V-0
Electrical Characteristics	Standard	Value
rated voltage	IEC 60664-1	1000 V (UL/CSA: 600 V)
pollution degree	IEC 60664-1	3
installation (overvoltage) category	IEC 60664-1	3
material group	IEC 60664-1	2
rated impulse withstand voltage	IEC 60664-1	8 kV
rated current T _{amb} = 40 °C		50 A
current carrying capacity	IEC 60512-5-2	see derating curve
contact resistance	IEC 60512-2-1	≤ 5 mΩ
insulation resistance	IEC 60512-3-1	≥ 10 ¹⁰ Ω
Climatical Characteristics	Standard	Value
climatic category	IEC 60068-1	40 / 125 / 10
upper temperature	IEC 60512-11-9	+125 °C
lower temperature	IEC 60512-11-10	-40 °C
Mechanical Characteristics	Standard	Value
mechanical operation	IEC 60512-9-1	≥500 mating cycles
Materials	Standard	Value
insert		PA-GF
contacts		CuZn (brass)
contact plating		Ag (silver)
color		black

Alle technischen Daten wurden unter Laborbedingungen ermittelt und können im Praxisbetrieb abweichen.
Es handelt sich bei den Angaben weder um Beschaffenheits- noch um Haltbarkeitsgarantien.
All technical data have been measured in a laboratory environment and can be different during
practical usage of the product. Any product information is for descriptive usage only and not legally binding;
particularly the information does not constitute or provide any legal guarantees ("Beschaffenheitsgarantie" or
"Haltbarkeitsgarantie").

Gewicht (errechnet) / Calc WT: 8 g				Zul. Abw./Tolerances:				Maßstab / Scale : 2:1 (1:1)		A3				
Prüfmaß / Testdimension								ISO 2768-m		CUSTOMER DRAWING				
Teileindex / Partindexnumber:								Buchsenmodul 3-Pol socket module 3 pole						
Bagatelle change:														
				Gez.	01.09.2017		M C146 B03 801 E8						Blatt/ Sheet	
				Drawn	PWOELFFLE								1	
				Status	Released								1 Bl.	
				Gepr.	08.09.2017									
				Checked	MGRIMM									
				Amphenol Tuchel Industrial GmbH										
02	201700257		01.09.2017	PWOLF										
Index	Änderung/Description		Datum/Date	Name	Ers. f. / Replacement for : M-C146 B03 801 E8 Rev.01									