
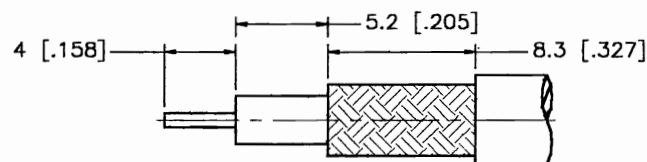
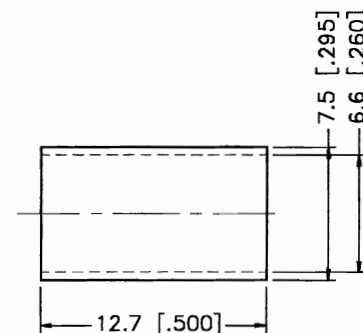
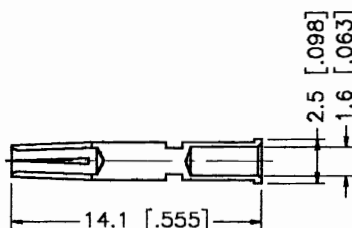


RECOMMENDED
MOUNTING HOLE

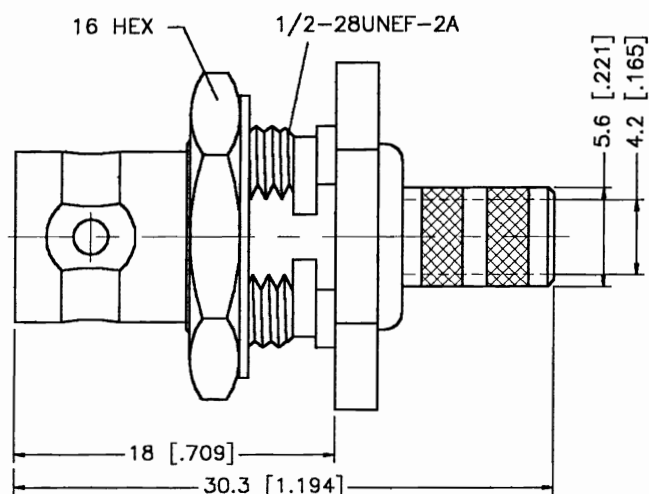

RECOMMENDED
CABLE STRIPPING DIM'S

REV.	DATE	DESCRIPTION
NC	08/18/98	INITIAL RELEASE

	DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE						
1	BODY	BRASS	NICKEL	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	G.R.S.	08/18/98	TITLE BNC BULKHEAD JACK – LMR 240				
2	INSULATOR	TEFLON	NATURAL		CHECKED							
3	CONTACT PIN	PHOS. BRONZE	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5–6 = ± 0.2 6–30 = ± 0.4 30–120 = ± 0.6 120–315 = ± 1 315–1000 = ± 1.6 1000–2000 = ± 2.4	ISSUED			SIZE		FSCM NO.	DWG. NO.	REV.
4	FERRULE	COPPER	NICKEL					A	99001		112602.DWG	NC
5												
6												
7												
8				DO NOT SCALE DRAWING			SCALE	NA	PART NO.	112602	SHEET	1 OF 1