

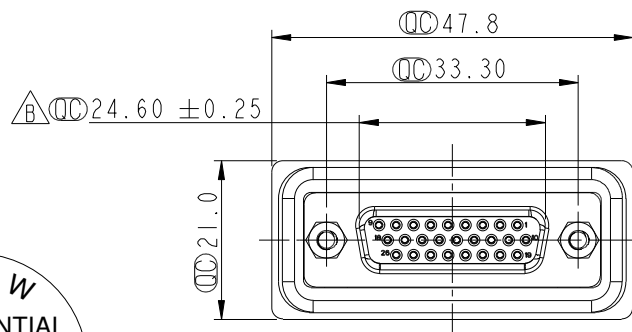
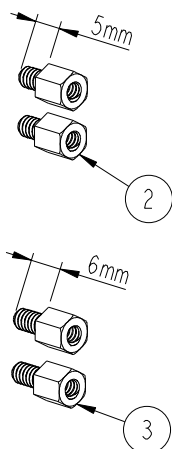
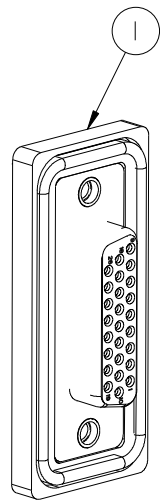
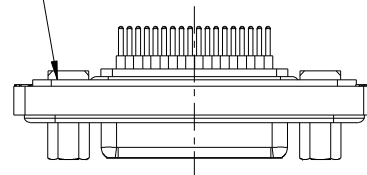


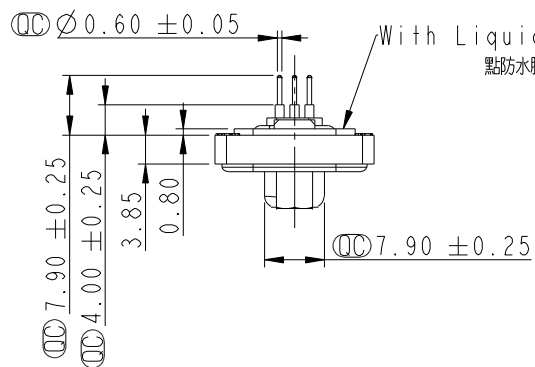


ALTW
CONFIDENTIAL
2013-09-02
R&D DEPT.

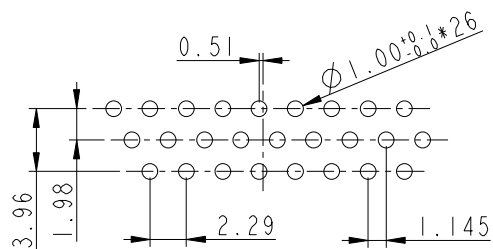

26 Pin Female connector
PCB Pin Layout
Scale 2:1


Note:

- * $\varnothing$ Important Dimension.
- * Waterproof Rate : IP68
IP68: 1M of depth of water 24 hours
(防水等級 : IP68)
(IP68: 1米水深24小時)
- * Do Mating Test After Glued
點膠後, 須作對插測試
- * HD-SUB Conn. : Black Core , PBT
- * Plastic Jacket : Black , Nylon+GF
- * Pin : Copper Alloy , Gold Plated
- * Ring : Light Blue, Silicone
- * Screw : Copper Alloy, Nickel Plated, #4-40 UNC



Screw L=5.0 For Panel Thickness
Under 1.2mm
適用板厚為 1.2mm 以下

Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm
適用板厚為 1.2~2.0mm

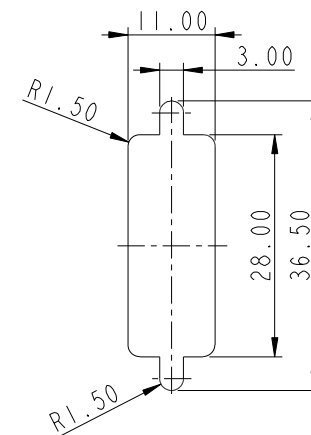

Recommended Panel Cut-Out
建議挖孔尺寸

UNIT:mm		TITLE	
TOLERANCE		D-SUB Conn.	
.X		Panel Screw HD26P F Conn. F Pin	
.XX		SCALE	SIZE
.XXX		REV.	WC-REV.
ANGLES		SHEET OF	
		REV.	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
HDB-26PFFP-SL8001	Di_lu	2013/09/02
DWG NO	CHECKED BY	DATE
HDB-26PFFP-SL8001	Mafei	2013/09/02
CUSTOMER	APPROVED BY	DATE
ALTW	Victor	2013/09/02