




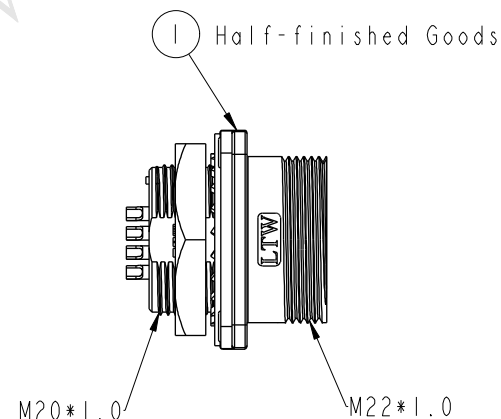

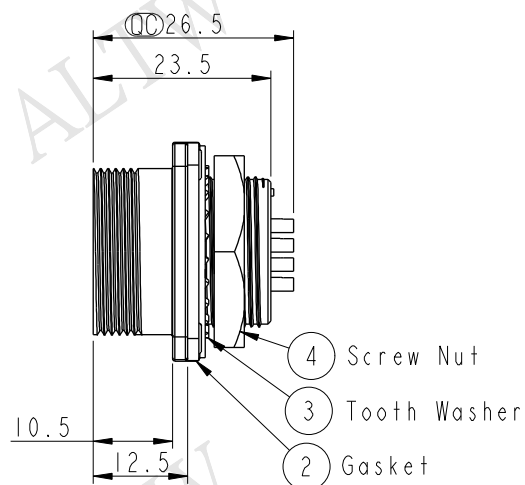


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2012/10/22	Ruru	LD20-12RMFS-SS8001 To LD20-12PMFS-SN8001
B	LE31650235	2016/05/04	Vicky	Update Note




Assembly Instruction

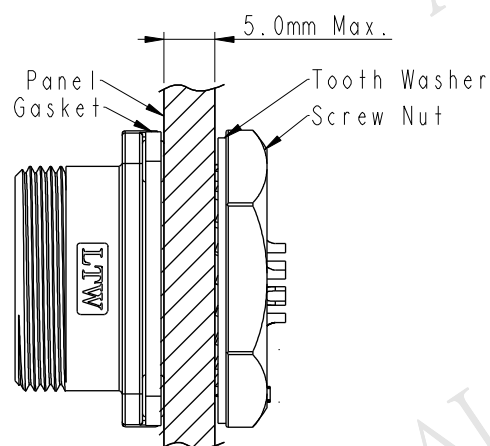

△ Note:

- * ⌀ Important Dimension.
- * Waterproof Rate: IP68
IP68: 1M depth of water in 24 Hrs.
(防水等級: IP68)
IP68: 水深一米測試 24 小時
- * Shell: Zinc Alloy#3, Ni Plated, Silver.
- * Insulation: Nylon, Black
- * Female Pin: Copper Alloy, Silver Plated
- * Gasket: Silicone, Gray
- * Recommended Panel Thickness 5.0mm(Max).

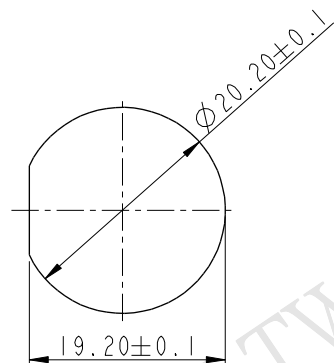

Recommend Panel Cut-Out

UNIT: mm		TITLE	
TOLERANCE		PANEL NUT 12PIN M CONN F PIN	
.X	±0.25	SCALE	1:1
.XX	±0.1	SIZE	A4
.XXX	±0.05	SHEET	1 OF 1
ANGLES	±1°	REV.	B
		WC-REV.	A.2
		QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	LD20-12PMFS-SN8001	DRAWN BY	Vicky	DATE	2016-05-04
DWG NO	LD20-12PMFS-SN8001	CHECKED BY	Rita	DATE	2016-05-04
CUSTOMER	ALTW	APPROVED BY	Lisa	DATE	2016-05-04