



1. MATERIALS AND FINISHES:
BODY & COUPLING NUT - BRASS, NICKEL PLATING
CONTACT - BRASS, SILVER PLATING
INSULATOR - LCP
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C TO +165°C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 83-ISP-1050, AND DATE CODE"

5. SHOWS CABLE ENTRY DIMENSIONS.

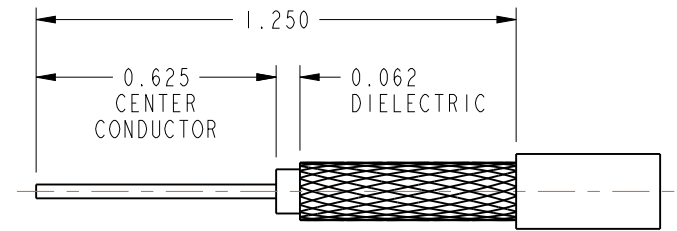

RECOMMENDED CABLE STRIPPING DIMENSIONS

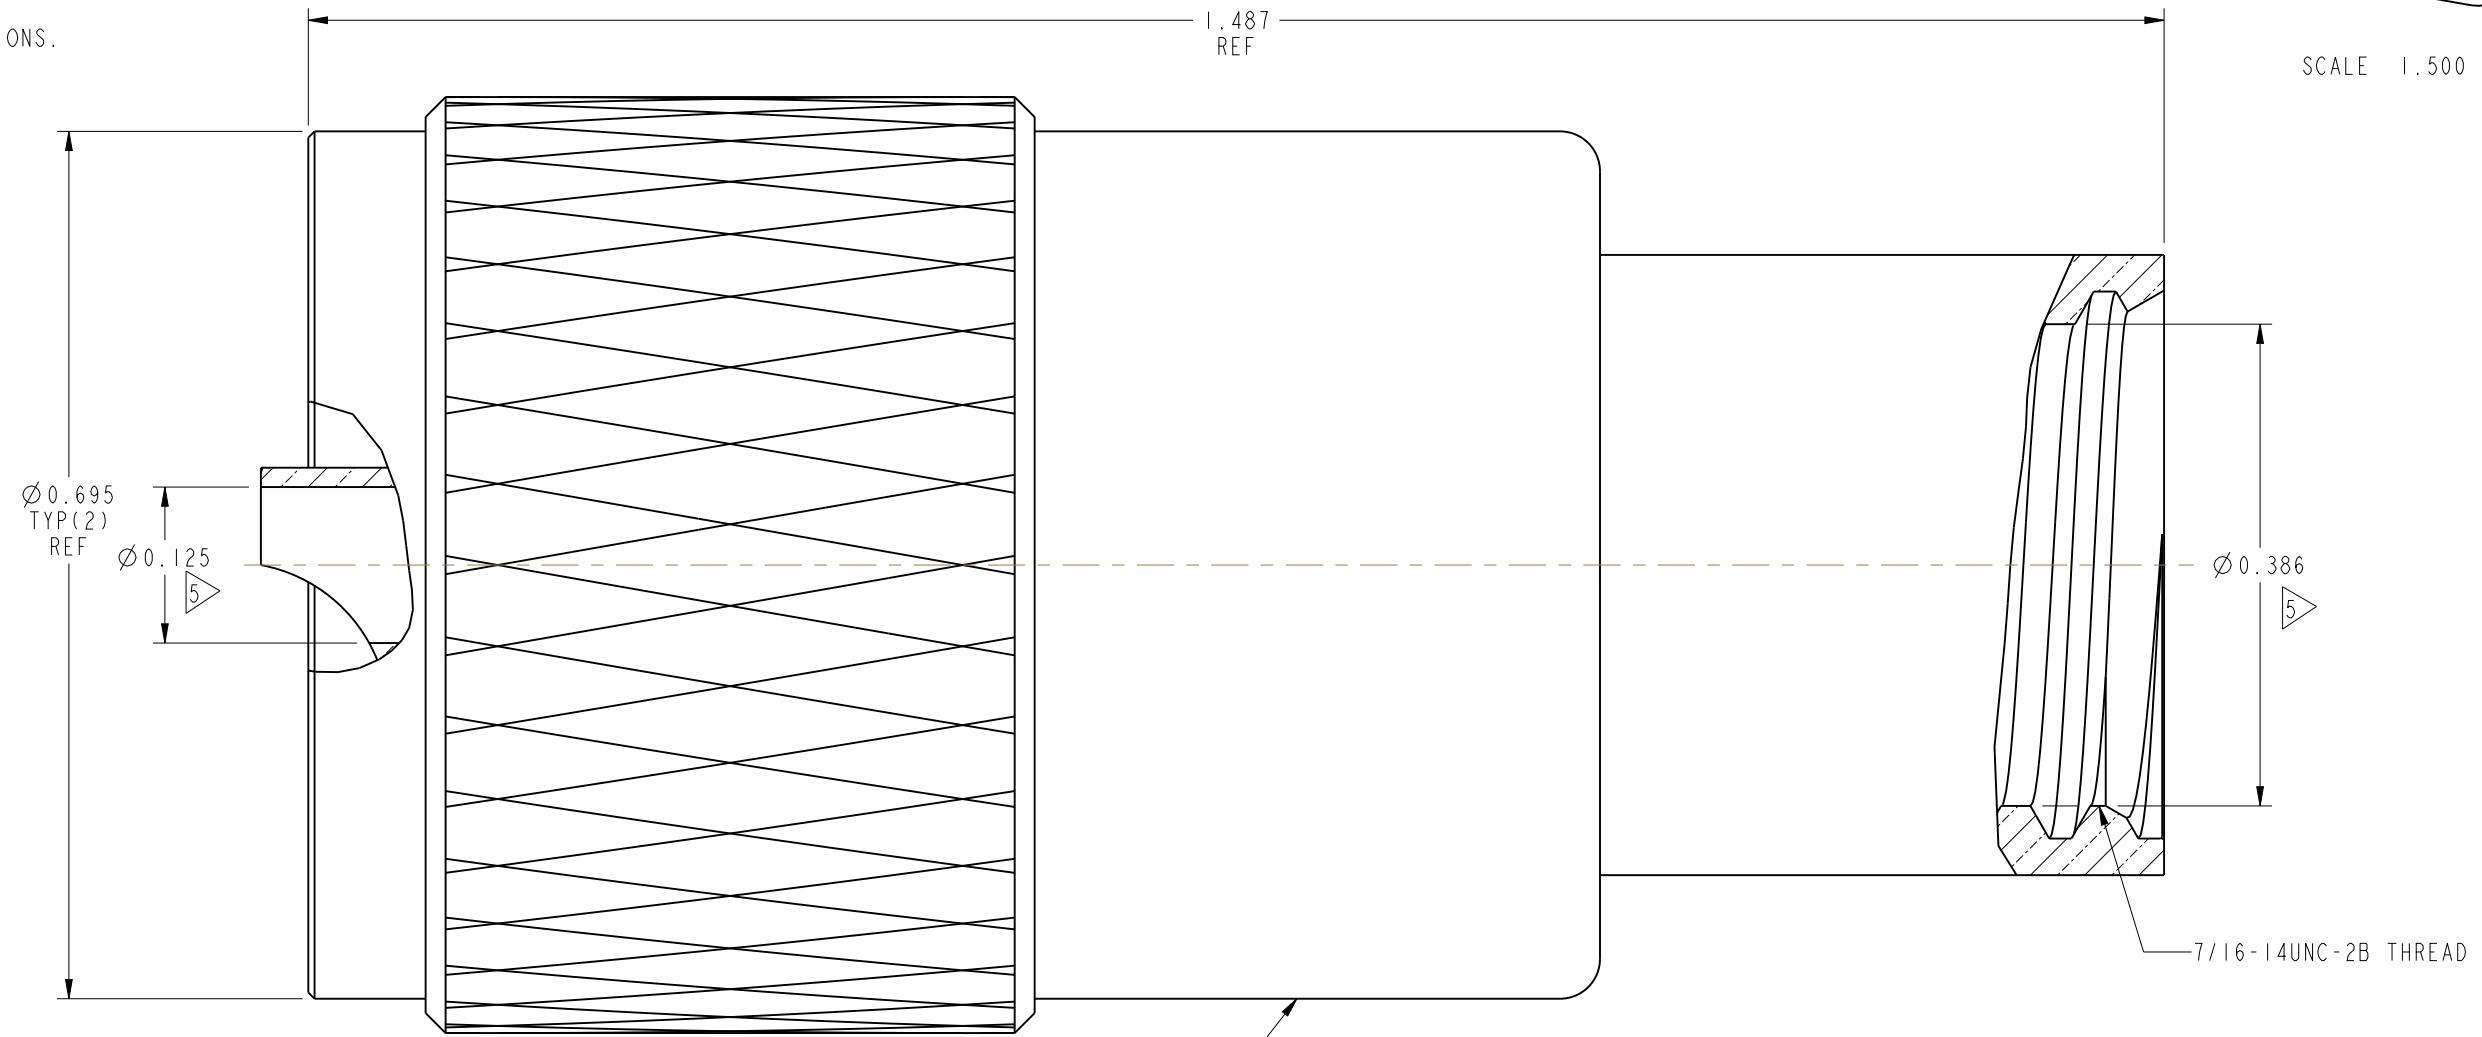

STAMP(REF):
AMPHENOL RF 83-ISP-1050
74868 PL259 49190

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN CLEMENT	DATE 24-Oct-13	TITLE UHF (M) RG 8 CABLE GROUP		Amphenol RF	
	SEE NOTES	ENGINEER CLEMENT	DATE 24-Oct-13			www.amphenolrf.com	
	REFERENCE DOR 305483-51	APPROVED K. CAPOZZI	DATE 2/21/14	SCALE: 6.5:1.0		DRAWING NO.83-ISP-1050	
	CONFIGURATION LEVEL: In Work	CAD FILE	DWG SIZE B		REV M		ITEM NO.83-ISP-1050
	FINISH						PART NO.83-ISP-1050