


BN 7 - DIN 912 - ISO 4762

Hexagon socket head cap screws  
fully threaded  
fully threaded

DIN 912  
ISO 4762

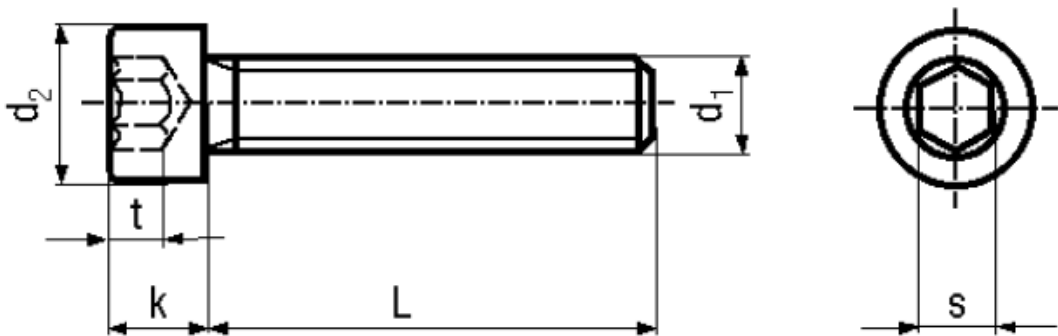

|          |       |                           |            |
|----------|-------|---------------------------|------------|
| Material | Steel | Tensile strength          | 1200 N/mm2 |
| Surface  | black | Proof stress 0,2%         | 1080 N/mm2 |
| Quality  | 12.9  | Elongation after fracture | min. 8%    |

| Article No. - 1007564 |    |
|-----------------------|----|
| d <sub>1</sub>        | M6 |
| L                     | 16 |
| d <sub>2</sub>        | 10 |
| k                     | 6  |
| s                     | 5  |
| t min.                | 3  |

DIN 912: Standard withdrawn

M 1.4; M18; M22; M27; M33 not included in ISO 4762.  
M 2.6 not included in DIN 912 and ISO 4762.