

5




4

3


2

1


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

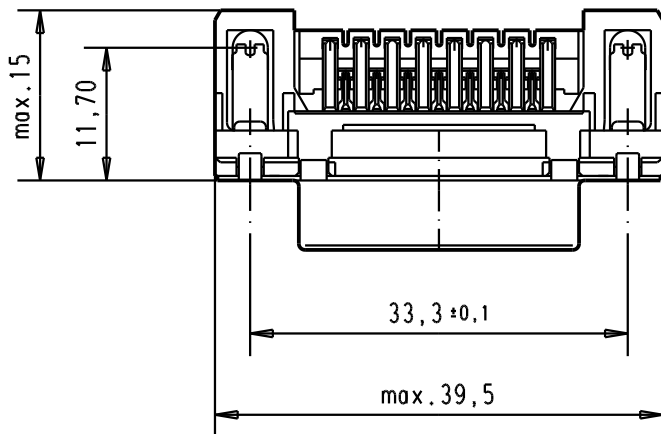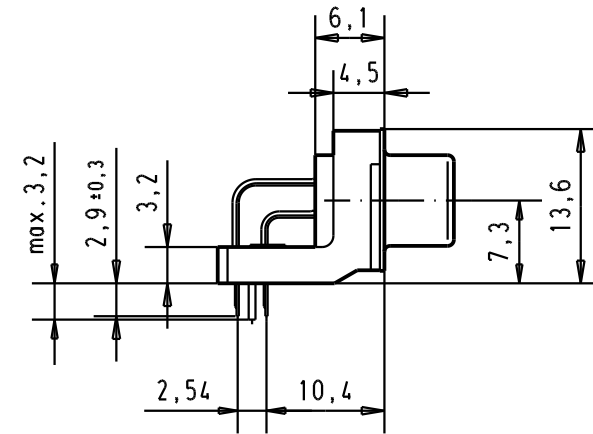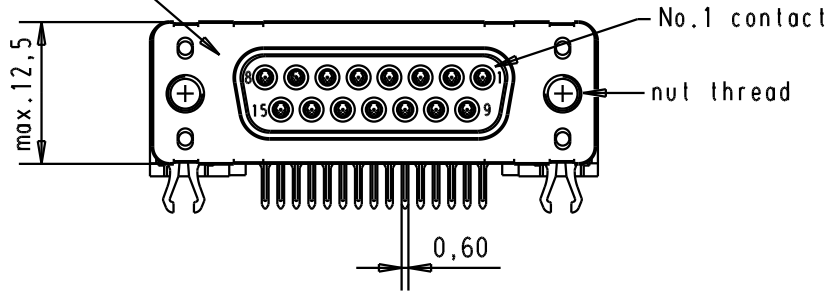

PCB layout hole component side

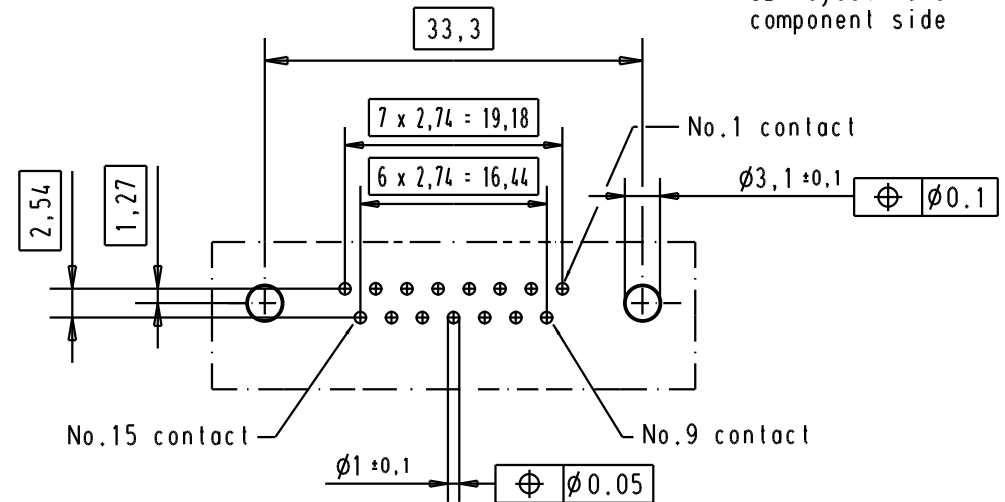

Connector retention and insertion forces on the PCB = 25 / 80 newtons

A	09 66 252 3611	M 3	1							 All Dim. in mm Orig. Size DIN A 4	D-Sub 15 poles standard angle female, solder pin with nut and grounding board lock.	Moßstab/ Scale 1.5:1
	09 66 252 6611	M 3	2									
	09 66 252 7611	M 3	3									
	09 66 252 3612	4-40 UNC	1	31892	05/05/04	JH						
	09 66 252 6612	4-40 UNC	2	31084	04/SEP/02	YT						
	09 66 252 7612	4-40 UNC	3	27960	05/dec/00	ALSPACE						
	Part number	Nut thread	Performance level	Mod.	Dat.	Name	HARTING EURL F-95972 Paris				TB 0966252x61x	Blatt/ Page 5 / 5