

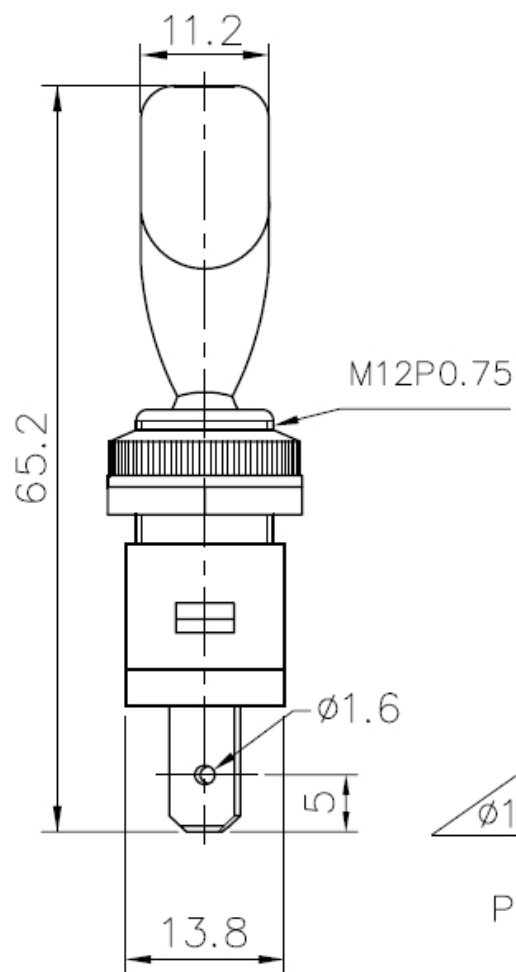


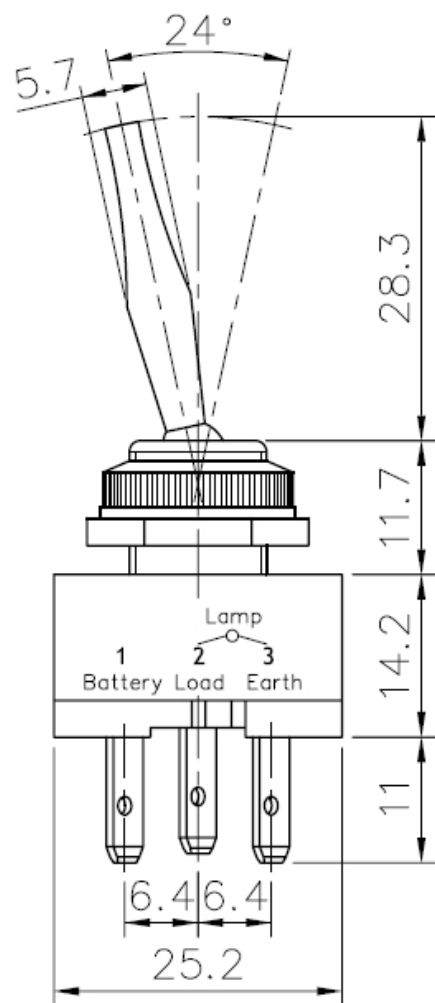

SPECIFICATION

1. Rating : DC 12V 6A
2. Contact R. : 50m Ω Max.
3. Insulation R. : DC 500V 100M Ω Min.
4. Dielectric Strength : AC 1500V 1 minute
5. Electrical Life : 20,000 make and break cycles at full load.

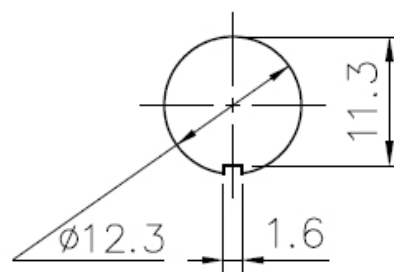

Panel Thickness:
3mm Max.