




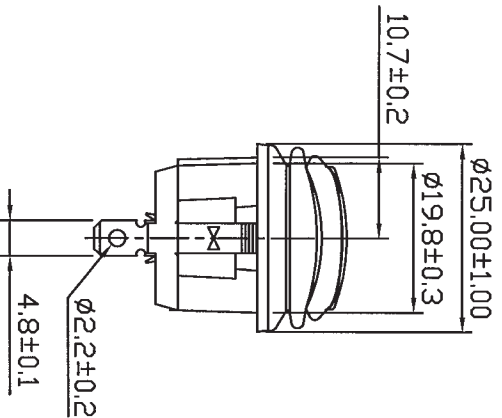
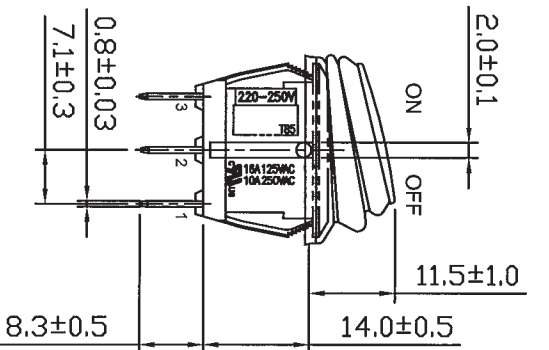
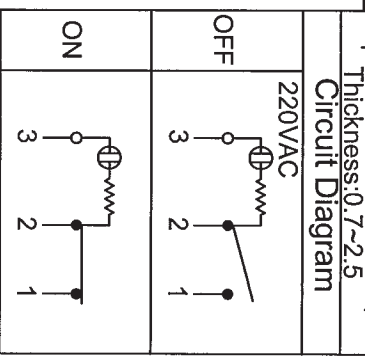



	Mounting Hole	
Rating	16A 125VAC, 10A 250VAC 	 
Contact Resistance	10(4)A 250V~ 	
Insulation Resistance	50m ohm Max.	
Dielectric Strength	DC 500V 100M ohm Min.	
Operation Temperature	AC 1500V 1 minute	
Switch Function	-25°C~85°C	
	3P SPST ON-OFF (Neon dependent)	

***MATERIAL:**

Frame: Nylon 66, Black
 Actuator: PC, Green clear
 Waterproof rubber: Silicone
 Terminals: Silver plated, Copper alloy
 Hot Stamping: None
 Waterproof: IP65



C8(R13)R13-112B8-02(1823705)_1

09/17/14	曹盈芳	依公司規定追加SCI Logo			
Date	Name	Description		NO	
Drawn	Checked	Approved	SCI BOM NO.	1823985	Model Name ROCKER SWITCH
曹盈芳			Customer No.		Model No. R13-112B8-02
09/17/14		P/17/14	Unit	mm	Rev. 1
			 Shin Chin Industrial Co., Ltd.		