


Micro Switches

MSW-21


(Specification)

(Rating):1A 125/250V AC
(Contact R):30mΩ max
(Insulation R):250V DC 100MΩ min
(Dielectric Strength):1 Minute 1000V AC
(Ambient Temperature):-25℃~+65℃
(Electrical Life):30, 000 Cycles

(Outline Drawing)

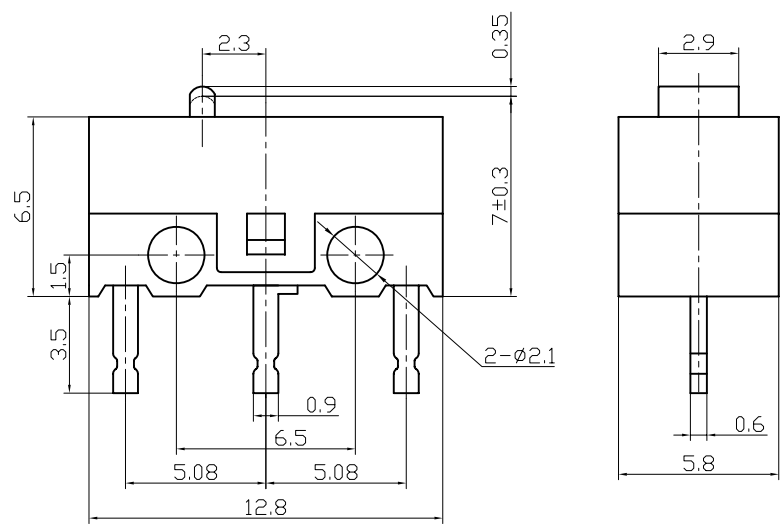

(Mounting)



(Circuitry)

