

Drg No :- C 34594

SPECIFICATION

ACTUATING FORCE:- 2.5N(9ozf)MAX.

RELEASE FORCE:- 0.3N(1ozf)MIN.

FREE POSITION:- 9.2(.36)MAX.

OPERATING POSITION:- 8.4 ± 0.3 (.33)

MOVEMENT DIFFERENTIAL:- 0.1(.004)MAX

OVERTRAVEL(AVAILABLE):- DEPRESS
TO CASE


SPECIAL FEATURE :-

TESTED AND STAMPED TO U.L. , CSA
AND "ENEC 19" REQUIREMENTS


APPROVAL RATING :-

5 AMP - 125 OR 250V.AC.

DIAGRAM OF CONNECTIONS

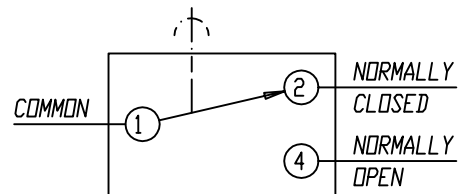

INSTALLATION DRAWING

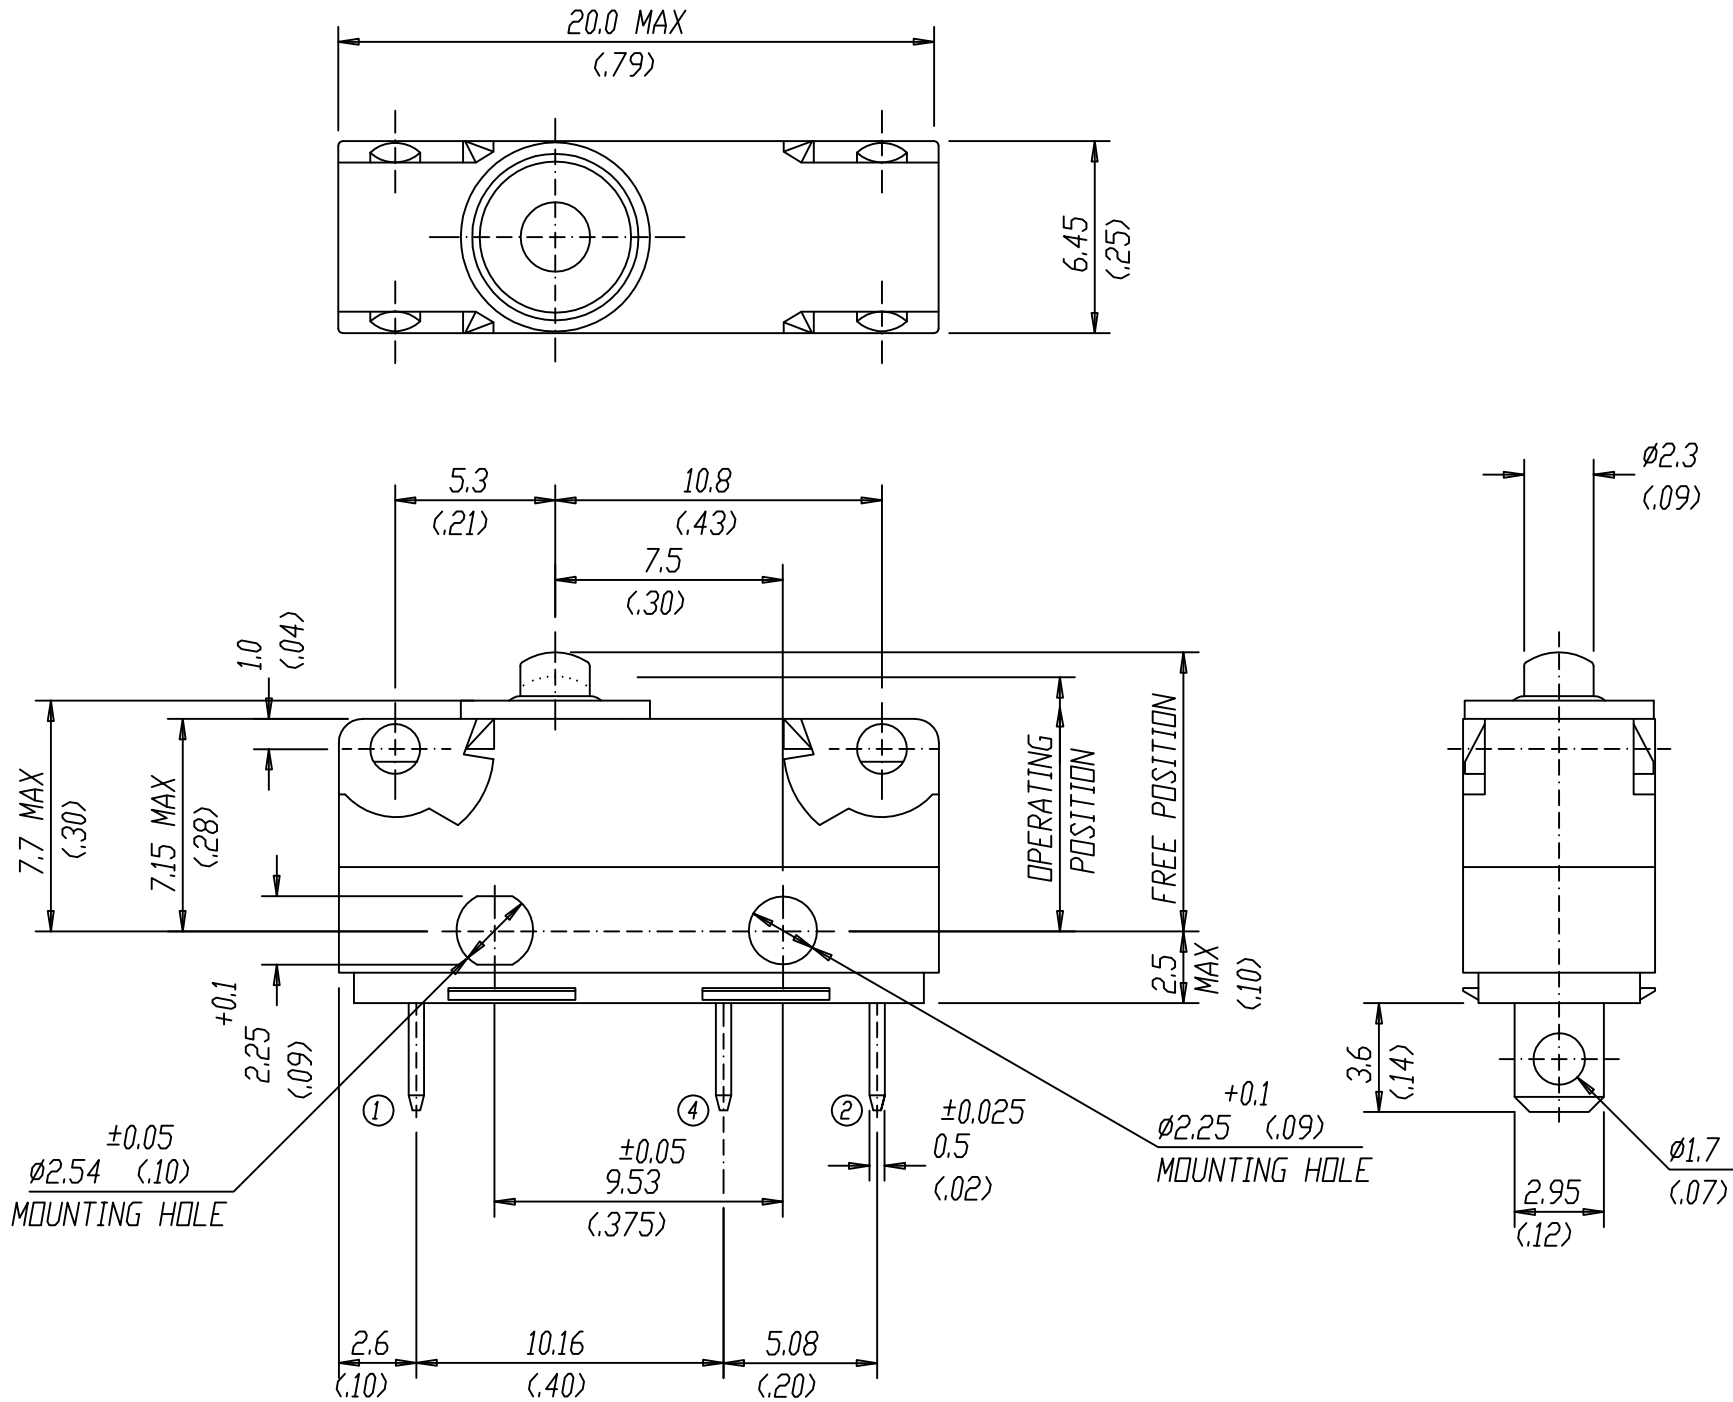


ISSUE	REVISION	DATE
1	FIRST ISSUE	19/03/90
2	ENEC 19 ADDED DPCA 14257	04/12/01

SAIA-Burgess Electronics

SWITCHES•MOTORS•CONTROLLERS

SAIA-Burgess Electronics Limited
Dukesway, Team Valley Trading Estate
Gateshead, Tyne & Wear NE11 0UB
Tel: (0191)4016100, Fax: (0191)4016322



THIRD ANGLE
PROJECTION

DO NOT SCALE !

This drawing must only be
amended on CAD system

TOLERANCES UNLESS STATED:-

NO DECIMAL PLACE ± 0.50 1 DECIMAL PLACES ± 0.25

2 DECIMAL PLACES ± 0.15 ANGULAR $\pm 1^\circ$

INCH - OUNCE UNITS (IN BRACKETS)

ALL DIMENSIONS SPECIFIED IN MILLIMETRES

DRAWN	P.S.T.	Approved	
DATE	19/03/90	DRAWING OFFICE	
SCALE	4/1	ENGINEERING	
DATE ISSUED		QUALITY ASSURANCE	

TITLE / DESCRIPTION

V4NST7-UL

Drg No :- C 34594

A3